



Service Manual

DV7010 /A1B, /A1G, /C1G, /L1G, /N1B, /N1G, /F1N, /S1G, /U1B
DV18A /A1B, /A1G, /C1G, /K1G, /S1G, /L1G, /U1B
DV17 /N1B, /N1G, /F1N, /S1G
DVD Player

DV7010

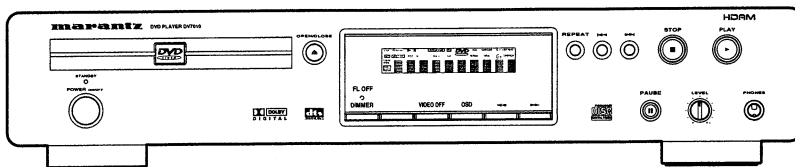

DV-18mkII

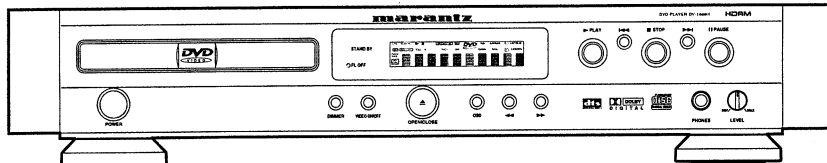

DV-17

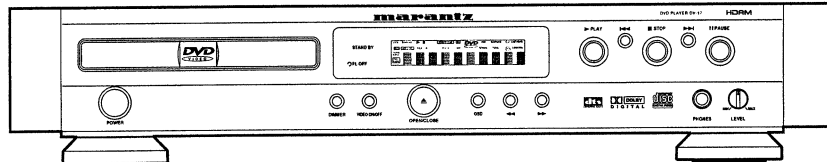


TABLE OF CONTENTS

SECTION	PAGE
1. MAIN UNIT	
1.1 TECHNICAL SPECIFICATIONS	1-1
1.2 CONNECTION FACILITIES	1-2
1.3 INFORMATIONS	1-3
1.4 SERVICING HINT	1-4
1.5 DISASSEMBLY	1-5
1.6 SERVICE MODE	1-7
1.7 WAVEFORM	1-8
1.8 WIRING DIAGRAM	1-9
1.9 BLOCK DIAGRAM	1-11
1.10 SCHEMATIC DIAGRAM AND PARTS LOCATION	1-13
1.11 PARTS LOCATION	1-23
1.12 MICROPROCESSOR AND IC DATA	1-30
1.13 EXPLODED VIEW AND PARTS LIST	1-33
1.14 ELECTRICAL PARTS LIST	1-41
2. DB-VLD210 (DVD Loader for MARANTZ)	
3. DB-VPB210 / 211 / 212 / 213 / 214 (DVD PCB Module for MARANTZ)	

Please use this service manual with referring to the user guide (D.F.U) without fail.

修理の際は、必ず取り扱い説明書を準備し操作方法を確認の上作業を行ってください。

marantz®

DV7010 / DV-18mkII / DV-17

403K855010 ACT
 3120 785 22490
 First Issue 2001.04

MARANTZ DESIGN AND SERVICE

Using superior design and selected high grade components, **MARANTZ** company has created the ultimate in stereo sound. Only original **MARANTZ** parts can insure that your **MARANTZ** product will continue to perform to the specifications for which it is famous.

Parts for your **MARANTZ** equipment are generally available to our National Marantz Subsidiary or Agent.

ORDERING PARTS :

Parts can be ordered either by mail or by Fax.. In both cases, the correct part number has to be specified.

The following information must be supplied to eliminate delays in processing your order :

1. Complete address
2. Complete part numbers and quantities required
3. Description of parts
4. Model number for which part is required
5. Way of shipment
6. Signature : any order form or Fax. must be signed, otherwise such part order will be considered as null and void.

USA

MARANTZ AMERICA, INC.
440 MEDINAH ROAD
ROSELLE, ILLINOIS 60172
USA
PHONE : 630 - 307 - 3100
FAX : 630 - 307 - 2687

EUROPE / TRADING

MARANTZ EUROPE B.V.
P.O.BOX 80002, BUILDING SFF2
5600 JB EINDHOVEN
THE NETHERLANDS
PHONE : +31 - 40 - 2732241
FAX : +31 - 40 - 2735578

BRAZIL

PHILIPS DA AMAZONIA IND. ELET. ITDA
CENTRO DE INFORMACOES AO
CEP 04698-970
SAO PAULO, SP, BRAZIL
PHONE : 0800 - 123123(Discagem Direta Gratuita)
FAX : +55 11 534. 8988

**PROFESSIONAL AMERICAS
SUPERSCOPE TECHNOLOGIES, INC.**
MARANTZ PROFESSIONAL PRODUCTS
2640 WHITE OAK CIRCLE, SUITE A
AURORA, ILLINOIS 60504 USA
PHONE : 630 - 820 - 4800
FAX : 630 - 820 - 8103

**PROFESSIONAL AUSTRALIA
TECHNICAL AUDIO GROUP PTY, LTD**
558 DARLING STREET,
BALMAIN, NSW 2041,
AUSTRALIA
PHONE : 61 - 2 - 9810 - 5300
FAX : 61 - 2 - 9810 - 5355

CANADA

LENBROOK INDUSTRIES LIMITED
633 GRANITE COURT,
PICKERING, ONTARIO L1W 3K1
CANADA
PHONE : 905 - 831 - 6333
FAX : 905 - 831 - 6936

AUSTRALIA

QualiFi Pty Ltd,
24 LIONEL ROAD,
MT. WAVERLEY VIC 3149
AUSTRALIA
PHONE : +61 - (0)3 - 9543 - 1522
FAX : +61 - (0)3 - 9543 - 3677

THAILAND

MRZ STANDARD CO.,LTD
746 - 754 MAHACHAI ROAD.,
WANGBURAPAPIROM, PHRANAKORN,
BANGKOK, 10200 THAILAND
PHONE : +66 - 2 - 222 9181
FAX : +66 - 2 - 224 6795

SINGAPORE

WO KEE HONG DISTRIBUTION PTE LTD
130 JOO SENG ROAD
#03-02 OLIVINE BUILDING
SINGAPORE 368357
PHONE : +65 858 5535 / +65 381 8621
FAX : +65 858 6078

NEW ZEALAND

WILDASH AUDIO SYSTEMS NZ
14 MALVERN ROAD MT ALBERT
AUCKLAND NEW ZEALAND
PHONE : +64 - 9 - 8451958
FAX : +64 - 9 - 8463554

TAIWAN

PAI-YUING CO., LTD.
6 TH FL NO, 148 SUNG KIANG ROAD,
TAIPEI, 10429, TAIWAN R.O.C.
PHONE : +886 - 2 - 25221304
FAX : +886 - 2 - 25630415

MALAYSIA

WO KEE HONG ELECTRONICS SDN. BHD.
SUITE 8.1, LEVEL 8, MENARA GENESIS,
NO. 33, JALAN SULTAN ISMAIL,
50250 KUALA LUMPUR, MALAYSIA
PHONE : +60 3 - 2457677
FAX : +60 3 - 2458180

JAPAN Technical

MARANTZ JAPAN, INC.
35- 1, 7- CHOME, SAGAMIONO
SAGAMIHARA - SHI, KANAGAWA
JAPAN 228-8505
PHONE : +81 42 748 1013
FAX : +81 42 741 9190

日本マランツ株式会社

本社 〒228-8505
神奈川県相模原市相模大野7-35-1
営業本部 〒150-0022
東京都渋谷区恵比寿南1-11-9

KOREA

MK ENTERPRISES LTD.
ROOM 604/605, ELECTRO-OFFICETEL, 16-58,
3GA, HANGANG-RO, YONGSAN-KU, SEOUL
KOREA
PHONE : +822 - 3232 - 155
FAX : +822 - 3232 - 154

SHOCK, FIRE HAZARD SERVICE TEST :

CAUTION : After servicing this appliance and prior to returning to customer, measure the resistance between either primary AC cord connector pins (with unit NOT connected to AC mains and its Power switch ON), and the face or Front Panel of product and controls and chassis bottom.

Any resistance measurement less than 1 Megohms should cause unit to be repaired or corrected before AC power is applied, and verified before it is return to the user/customer.

Ref. UL Standard No. 1492.

In case of difficulties, do not hesitate to contact the Technical
Department at above mentioned address.

1.1 TECHNICAL SPECIFICATIONS

General

System	DVD system and Compact Disc digital audio system
Power requirements	
F Version (Japan)	AC 100 V, 15W
N Version (Europe)	AC 230 V, 15W
K Version (China)	AC 220 V, 16W
S Version (HK, S'pore, etc.)	AC 230 V, 16W
L Version (Taiwan)	AC 110 V, 15W
C Version (Korea)	AC 220 V, 16W
U Version (USA)	AC 120 V, 15W
A Version (Australia)	AC 240 V, 17W
Weight	
DV-17	6 kg
DV-18mkII	5.8 kg
DV7010	3.9 kg
Dimensions	
DV-17/DV-18mkII	458 (W) x 313 (D) x 88 (H) mm
DV7010	440 (W) x 304 (D) x 87 (H) mm
	(Not including protruding cables, etc.)
Operating temperature	+5°C to +35°C (+36°F to 96°F)
Operating humidity	5% to 85% (no condensation)

S-Video output

Y (luminance) - Output level	1 Vp-p (75)
C (color) - Output level	286 mVp-p (75) (NTSC)
	300 mVp-p (75) (PAL)
Jacks	S-VIDEO jack

Video output

Output level	1 Vp-p (75)
Jacks	RCA jacks

Component video output

(Y, C _B , C _R)	
Output level	Y: 1.0 Vp-p (75)
	CB, CR: 0.7 Vp-p (75)
Jacks	RCA jacks (F, K, S, L, C, U, A)
R/G/B output	
Output level	R/G/B: 0.7Vp-p (75)
Jacks	21pin SCART connector (N)

Audio output

Output level	
During audio output	200 mVrms (1 kHz, -20 dB)
Number of channels	2
Jacks	RCA jacks

Digital audio characteristics

Frequency response	4 Hz to 44kHz (DVD fs: 96 kHz)
S/N ratio	More than 115dB
Dynamic range	More than 102dB
Total harmonic distortion	0.002%
Wow and flutter	Limit of measurement
	(±0.001% W. PEAK) or lower

Digital output

Optical digital output	Optical digital jack
Coaxial digital output	RCA jack


Accessories

Remote control unit	1
Dry cell batteries	
DV-18mkII/DV7010: AA (R6P)	2
DV-17: AAA (RO3P)	2
Audio/Video Cable	1
Remote Control Cable	1
Operating Instructions	1

•The specifications and design of this product are subject to change without notice, due to improvement.

1.2 CONNECTION FACILITIES

1.2.1 Video performance (N only)



1.2.1.1 SCART

Pin No. TV (OUT)

Pin 1	Audio R out : 2Vrms
Pin 2	Audio R in : 2Vrms
Pin 3	Audio L out : 2Vrms
Pin 4	GND
Pin 5	GND
Pin 6	Audio L in : 2Vrms
Pin 7	Blue out/C in Blue : 0.7Vpp $\pm 0.1V$ into 75 Ohm *1 C : 300mVpp ± 30 into 75 Ohm *2
Pin 8	function switching out <2V : TV >5/<8 : asp.ratio 16 : 9 DVD/AUX >9.5/<12 : asp.ratio 4 : 3 DVD/AUX
Pin 9	GND
Pin 10	not connected
Pin 11	Green out:0.7Vpp $\pm 0.1V$ into 75 Ohm *1
Pin 12	not connected
Pin 13	GND
Pin 14	GND
Pin 15	Red/C out Red : 0.7Vpp $\pm 0.1V$ into 75 Ohm *1 C : 300mVpp ± 30 into 75 Ohm *2
Pin 16	fast switching out <0.4V into 75 Ohm=CVBS/S-Video 1</<3 into 75 Ohm=RGB
Pin 17	GND
Pin 18	GND
Pin 19	CVBS/Y out : 1Vpp $\pm 0.1V$ *1
Pin 20	CVBS/Y in : 1Vpp $\pm 0.1V$ *1
Pin 21	GND

Pin No. AUX (IN)


Pin 1	Audio R out : 2Vrms
Pin 2	Audio R in : 2Vrms
Pin 3	Audio L out : 2Vrms
Pin 4	GND
Pin 5	GND
Pin 6	Audio L in : 2Vrms
Pin 7	Blue in/C out Blue : 0.7Vpp $\pm 0.1V$ into 75 Ohm *1 C : 300mVpp ± 30 into 75 Ohm *2
Pin 8	function switching in<2V : DVD >5/<8 : asp.ratio 16 : 9 AUX >9.5/<12 : asp.ratio 4 : 3 AUX
Pin 9	GND
Pin 10	not connected
Pin 11	Green in:0.7Vpp $\pm 0.1V$ into 75 Ohm
Pin 12	not connected
Pin 13	GND
Pin 14	GND
Pin 15	Red/C in Red : 0.7Vpp $\pm 0.1V$ into 75 Ohm *1 C : 300mVpp ± 30 into 75 Ohm *2
Pin 16	fast switching in <0.4V into 75 Ohm=CVBS/S-Video 1</<3 into 75 Ohm=RGB
Pin 17	GND
Pin 18	GND
Pin 19	CVBS/Y out : 1Vpp $\pm 0.1V$ *1
Pin 20	CVBS/Y in : 1Vpp $\pm 0.1V$ *1
Pin 21	GND

*1 : 100% White *2 : Burst Level *3 : color bar(chroma level : 75%)

What are "regional codes"?

Motion picture studios want to control the home release of movies in different countries because theater releases aren't simultaneous (a movie may come out on DVD in the US when it's just hitting screens in Europe). Therefore they have required that the DVD standard include codes which can be used to lock out the playback of certain discs in certain geo-graphical regions. Players sold in each region will have that region's code built into the player. The player will refuse to play these "region coded" discs which are not allowed in the region. However, regional codes are entirely optional. Discs without codes will play on any player in any country. Some studios have already announced that only their new releases will have regional codes. There are six regions:

1. United States and Canada
2. Europe and Japan
3. Far East (except Japan & China)
4. South America and Oceania
5. Africa and the Middle East
6. China (except Hong Kong)

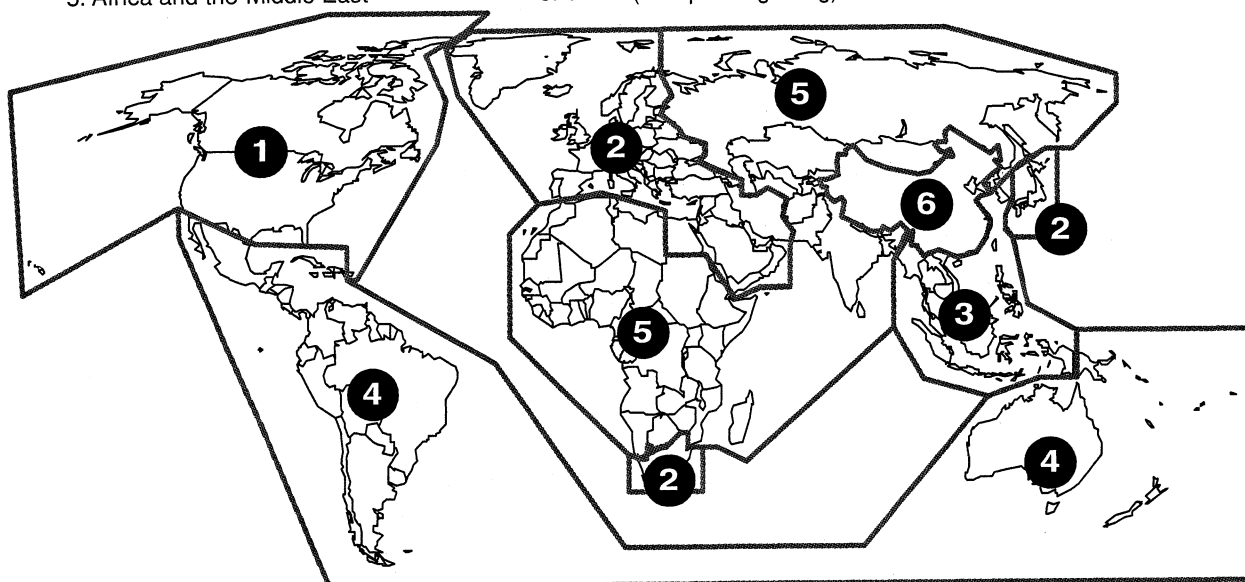

Map of DVD Regions

1.3 INFORMATIONS

REGION CODE

VERSION	REGION CODE	COUNTRY
/UXX	1	USA/CANADA
/FXX	2	JAPAN
/NXX	2	EUROPE
/CXX	3	KOREA
/LXX	3	TAIWAN
/SXX	3	SINGAPORE/HONGKONG
/AXX	4	AUSTRALIA
/KXX	6	CHINA

DVD INFORMATION

Below is a glossary of the new terms related to DVD.

Title:

A disc may have more than one story/movie on it, so each story/movie is called a "title".

For example, if there are 2 movies on the disc, they are separated into Title 1 and Title 2.

Chapter:

A title may also be separated into chapters.

For example, a movie (title) may be separated into 3 scenes (chapters).

Title 1			Title 2		
Chapter 1	Chapter 2	Chapter 3	Chapter 1	Chapter 2	Chapter 3

Subtitles:

DVDs are recorded with up to 32 different subtitle languages. If a disc has more than one subtitle language, you can select the subtitle language that you want to read.

Soundtrack language:

DVDs are recorded with up to 8 different soundtrack languages. If a disc has more than one language, you can select the soundtrack language that you want to listen to.

Multi-angles:

On some DVDs, scenes have been filmed from different angles (up to a maximum of 9). On these discs, you can select the angle that you want to watch. Please refer to the DVD's manual to see which scenes have multi-angles.








Resetting the Player to System Settings:

To reset the player, press and hold [STOP] button on the front panel when pressing **Power switch** to turn the power on.

All program memory, saved settings from functions such as Last Memory and Condition Memory are cleared, and all Setup screen menus are returned to factory settings.

THE DISCS THAT THE DV7010/DV-18mkII/DV-17 CAN HANDLE


The following discs can be played back with a DV7010/DV-18mkII/DV-17.

Types of playable discs and their marks	Diameter/ Playable sides	Playback time
DVD VIDEO 	DVD VIDEO	Digital audio Digital video (MPEG 2)
	12 cm (5 in.)/ single-sided	1 layer 2 layer 133 min. 242 min.
	12 cm (5 in.)/ double-sided	1 layer 2 layer 266 min. 484 min.
	DVD VIDEO	Digital audio Digital video (MPEG 2)
S VCD 	S VIDEO CD	Digital audio (MPEG 1) Digital video (MPEG 2) 40 min.
	12 cm (5 in.)/ single-sided	
	S VIDEO CD single	Digital audio (MPEG 1) Digital video (MPEG 2) 10 min.
	8 cm (3 in.)/ single-sided	
VIDEO CD 	VIDEO CD	Digital audio Digital video (MPEG 1) Max. 74 minutes
	12 cm (5 in.)/ single-sided	
	VIDEO CD single	Digital audio Digital video (MPEG 1) Max. 20 minutes
	8 cm (3 in.)/ single-sided	
CD   	CD	Digital audio Max. 74 minutes
	12 cm (5 in.)/ single-sided	
	CD single	Digital audio Max. 20 minutes
	8 cm (3 in.)/ single-sided	
F-Disc 	(F only) (株) フジカラーサービスの フジテレシネサービスで作成された ディスクです。	

Note: The regional code of the discs must meet to the regional code of the DV7010/DV-18mkII/DV-17.

1.4 SERVICING HINT

SERVICE HINTS

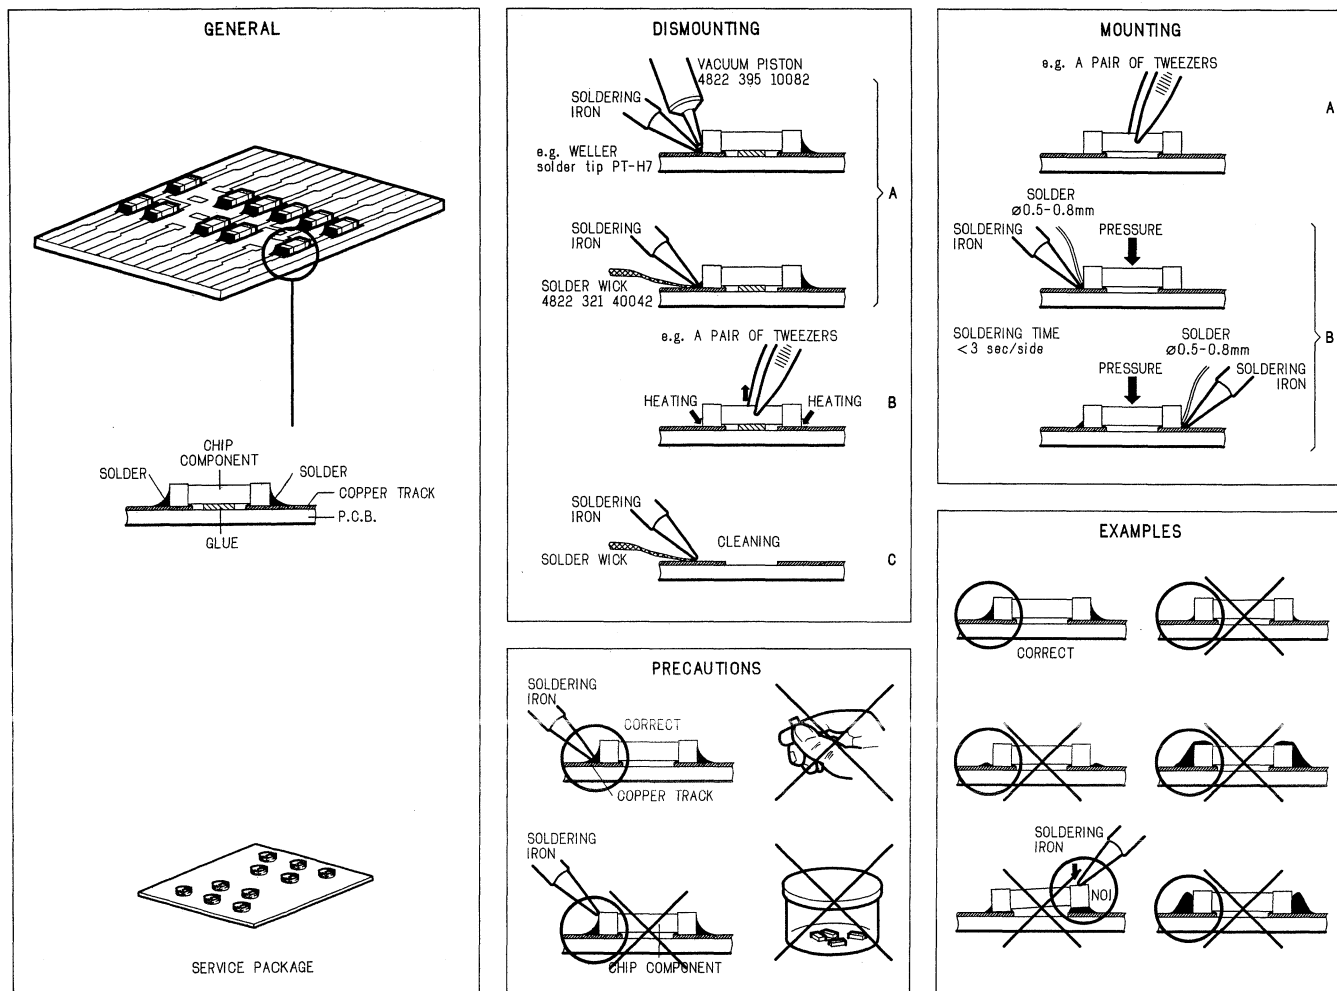


SERVICE TOOLS

Audio signals disc	4822 397 30184
Disc without errors (SBC444)+	
Disc with DO errors, black spots and fingerprints (SBC444A)	4822 397 30245
Disc (65 min 1kHz) without no pause	4822 397 30155
Max. diameter disc (58.0 mm)	4822 397 60141
Torx screwdrivers	
Set (straight)	4822 395 50145
Set (square)	4822 395 50132
13th order filter	4822 395 30204
DVD test disc (PAL)	4822 397 10131
DVD test disc (NTSC) ALMEDIO	TDV-540

1.5 DISASSEMBLY

Taking the disc out for EMERGENCY (For example: when it is not possible to turn on the product. The disc cannot be taken out from the loader.)

1. Remove the top cover (001D).
2. Remove the A screw from the bridge on the loader base. (see fig. 1)
3. Remove the B screw from the chassis <DV-17/DV-18mkII only>. (see fig. 1)
4. Remove the two C hooks of the bridge from the loader base. (see fig. 1)

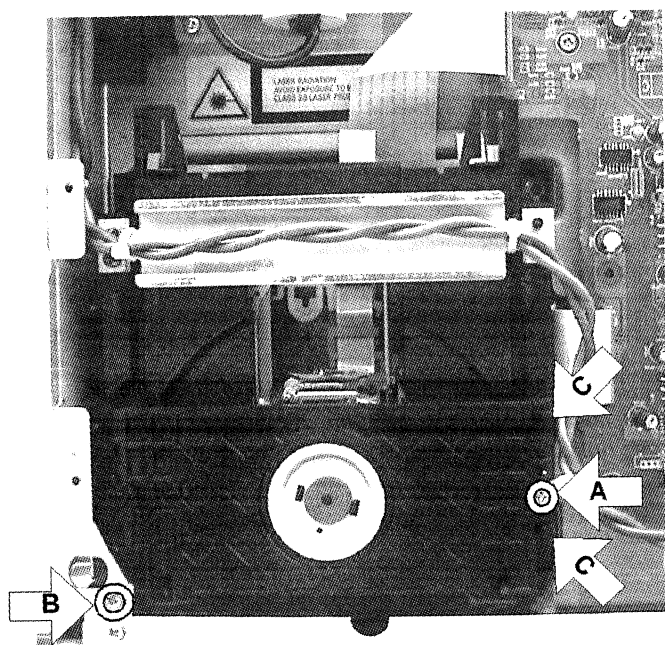


DV-17/DV-18mkII

1.5 DISASSEMBLY

電源が入らない時のディスクの取り出し方

1. トップカバーを外す。
2. クランパープレート上面の矢印Aビスを取り外す。(fig. 1 参照)
3. (DV-17/DV-18mkII の場合のみ) シャーシの矢印B ビスを取り外す。(fig. 1 参照)
4. クランパープレートを固定している矢印C フックを外す。(fig. 1 参照)

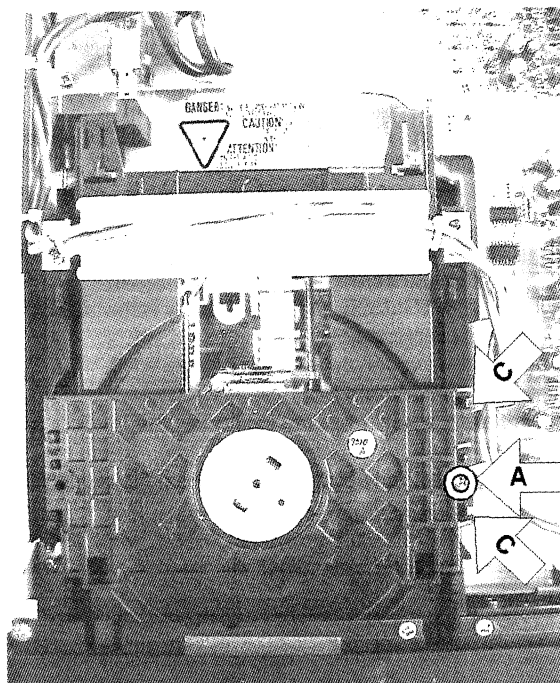

DV7010

Fig. 1

5. Remove the bridge with clumper (see fig. 2). Then, it is possible to take the disc out from the loader.

5. クランパープレートを少し持ち上げ、反対側のフックを外し、クランパープレートを取り外してディスクを取り出す。(fig. 2 参照)

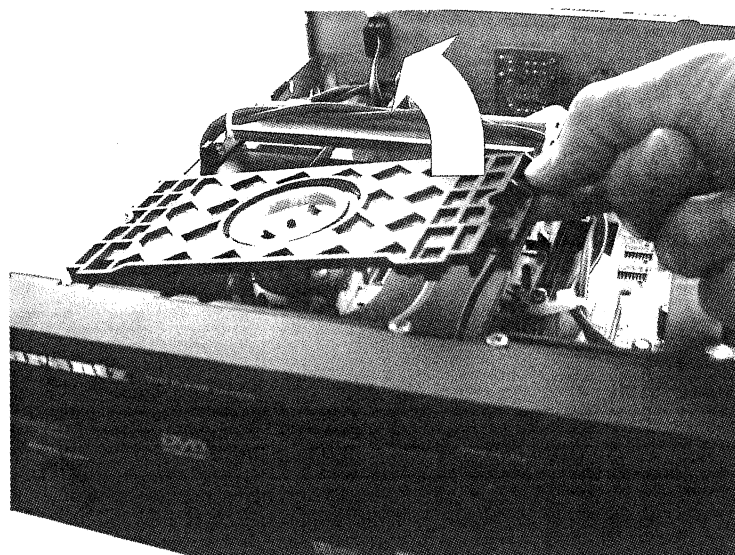


Fig. 2

Removal of the DVD module for DV-17/DV-18mkII

1. Remove the top cover (001D).
2. Disconnect the two flat cables (WV01 and WP02) from the connectors on the main PCB. (see fig. 3)
3. Remove the A screw from the bridge on the loader base. (see fig. 3)
4. Cut and remove the two D cable ties from the cables and chassis. (see fig. 3)
5. Remove the B screw from the chassis. (see fig. 3)
6. Remove the four E screws. (see fig. 3)
7. Remove the DVD module from the chassis, while sliding it in the direction of the rear panel.

Removal of the DVD module for DV7010

1. Remove the top cover (001D).
2. Turn on the product and press the OPEN/CLOSE button. Then the tray is opened. (If the product shuts down the power completely, see below "REMARK".)
REMARK : Insert a screwdriver (minus) into the hole at the left side of chassis. (see fig. 4)
Turn the gear with the screwdriver. (see fig. 5)
Then the tray is moved a little. Pull the tray with your hand at this time.
3. Remove the escutcheon on the tray.
4. Press the OPEN/CLOSE. (or Push the tray with your hand.) Then the tray is closed.
5. Disconnect the two flat cables (WV01 and WP02) from the connectors on the main PCB. (see fig. 3)
6. Remove the A screw from the bridge on the loader base. (see fig. 3)
7. Cut and remove the two D cable ties from the cables and chassis. (see fig. 3)
8. Remove the DVD module from the chassis, while sliding it in the direction of the rear panel.

DVD モジュールの取り外し方 (DV-17/DV-18mkII)

1. トップカバーを外す。
2. フラットケーブル WV01 と WP02 をメイン基板のコネクターから外す。(fig. 3 参照)
3. クランパープレート上面の矢印Aビスを取り外す。(fig. 3 参照)
4. 矢印D のケーブルタイ 2 箇所を外す。(fig. 3 参照)
5. シャーシの矢印B ビスを取り外す。(fig. 3 参照)
6. 矢印E ビス 4 本を取り外し、DVD モジュールをセット後方にずらしながら、取り出す。(fig. 3 参照)

DVD モジュールの取り外し方 (DV7010)

1. トップカバーを外す。
2. 電源を入れて OPEN/CLOSE ボタンを押し、トレイを出す。
注意 : 電源が入らない場合は、シャーシ左側面の穴(fig. 4 参照)よりマイナスドライバー等を挿入し、矢印の方向にギアを回しながらトレイを少し引き出す。(fig. 5 参照)あとは手でトレイを引き出す。
3. トレーについているエスカッションを取り外す。
4. トレーを閉める。
5. フラットケーブル WV01 と WP02 をメイン基板のコネクターから外す。(fig. 3 参照)
6. クランパープレート上面の矢印Aビスを取り外す。(fig. 3 参照)
7. 矢印D のケーブルタイ 2 箇所を外す。(fig. 3 参照)
8. 矢印E ビス 4 本を取り外し、DVD モジュールをセット後方にずらしながら、取り出す。(fig. 3 参照)

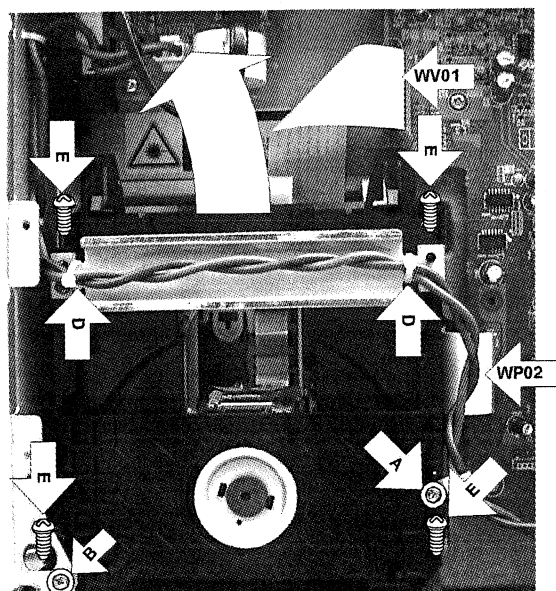


Fig. 3

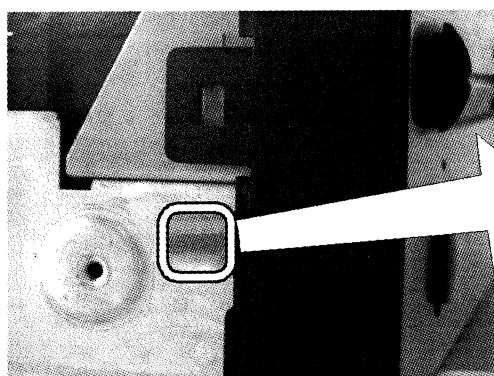


Fig. 4





Fig. 5

1.6 SERVICE MODE

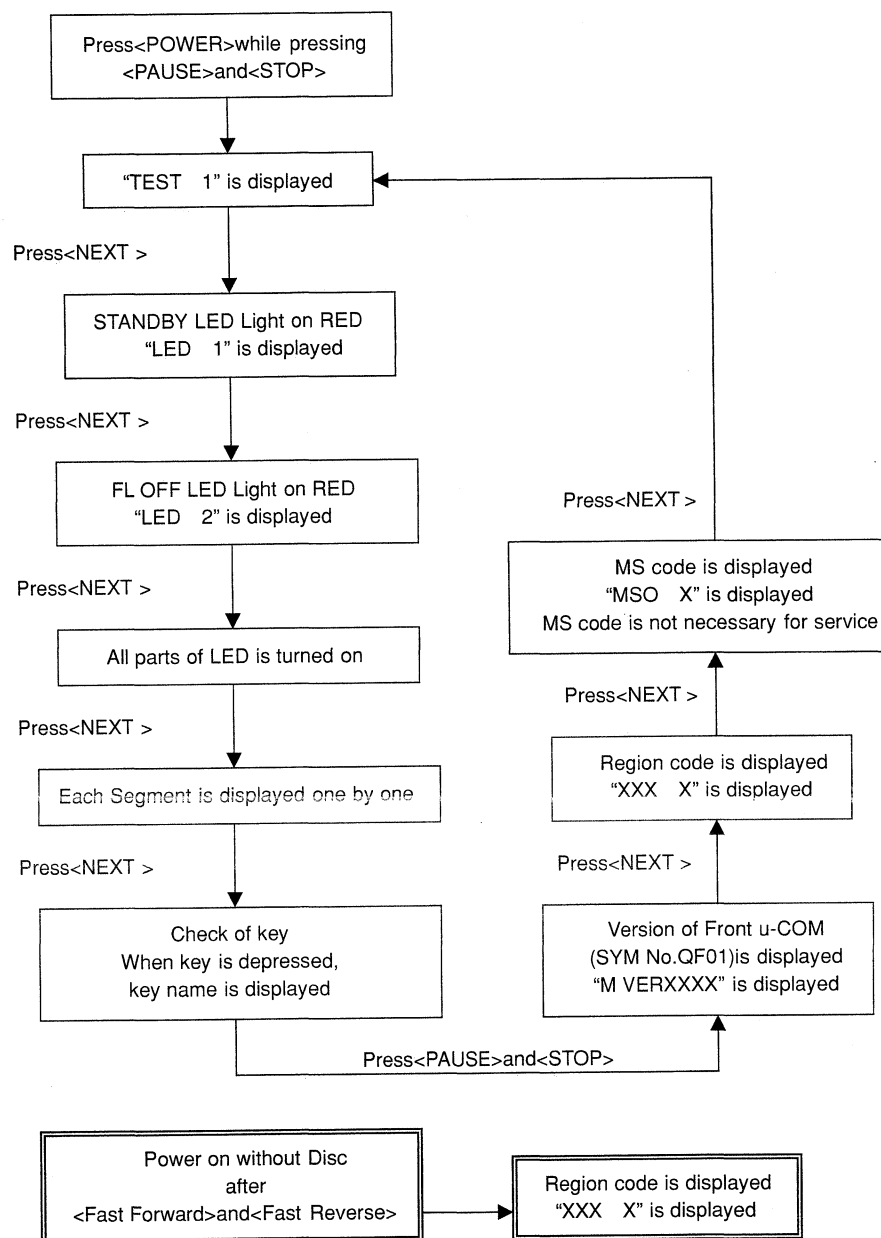

ERROR CODE


Error codes are displayed on the FL display.

FL Display	Possible causes	Operation of the unit
AV1 VER	AV-1 chip is not a match with program of system controller.	The sound may not out with the specific audio.
CPU AERR	CPU address error. (Hardware is unusual.)	No operation.
DMA AERR	DMA address error. (Hardware is unusual.)	No operation.
FLASH ID	Difference in versions of the internal ROM of the system controller and of the flash ROM, or bus line failure or reverse installation.	No operation.
FLASH WRP	Write protect error of the flash ROM.	No operation.
FLASH SIG	Difference in part number of the flash ROM. (When the ROM which couldn't be used was used.)	No operation.
FLASH SUM	Check sum error of the flash ROM (It exceeds the regular size.) or reverse installation. (Hardware is unusual.)	No operation.
FLASH SIZE	Size error of the flash ROM. (Use 4 or 8 M-bit.)	No operation.
ILLGAL	The system controller fetched a code other than an operation code. (Hardware is unusual.)	No operation.
RESERVE	Undefined interrupt. (Hardware is unusual.)	No operation.
SLOT	Inappropriate slot command issued. (Hardware is unusual.)	No operation.

1.7 WAVEFORM


Power requirements (Refer the circuit diagram page 1-15 to 1-16)
100V AC

1 100V 10μsec

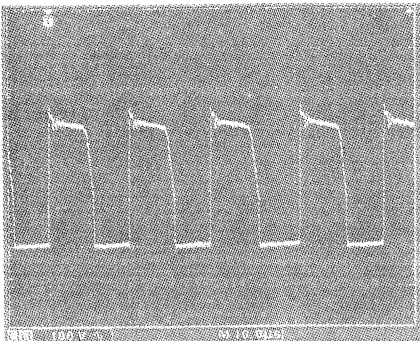


120V AC

1 100V 10μsec

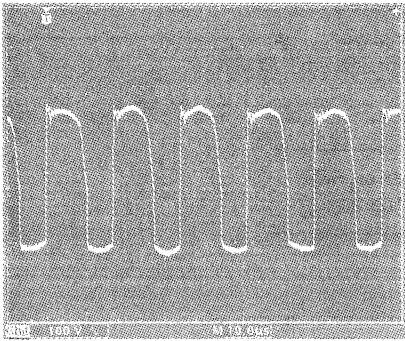


220V AC


1 100V 10μsec

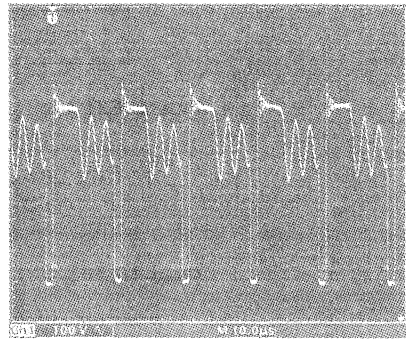


2 10V 10μsec

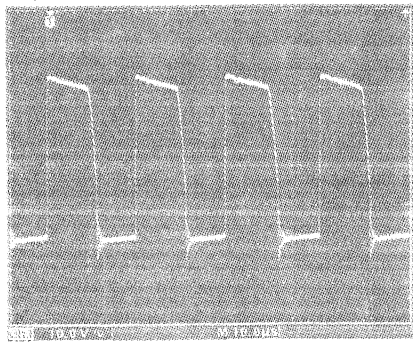


2 10V 10μsec

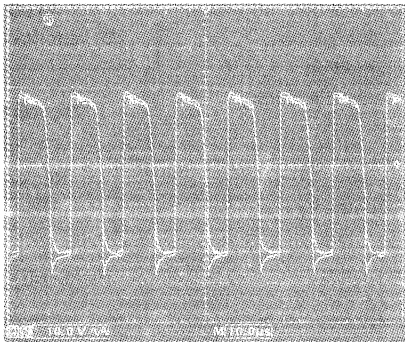


2 20V 10μsec

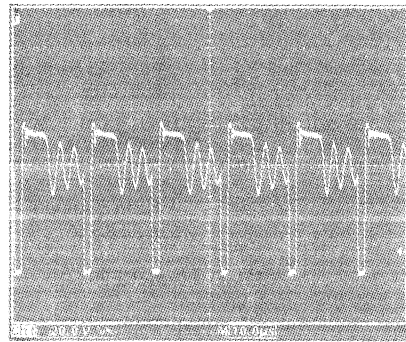


3 1V 10μsec

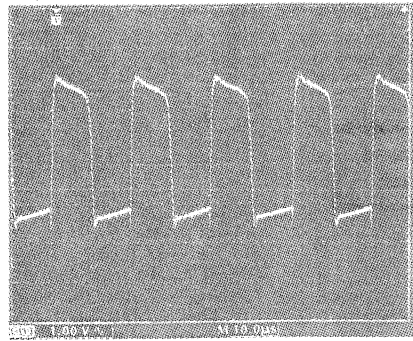


3 1V 10μsec

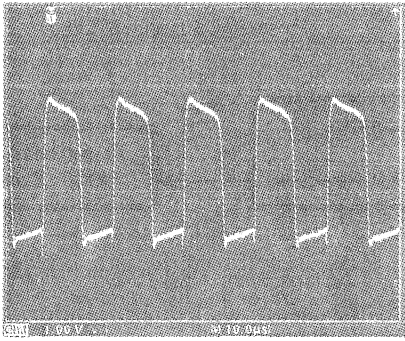


3 200mV 10μsec

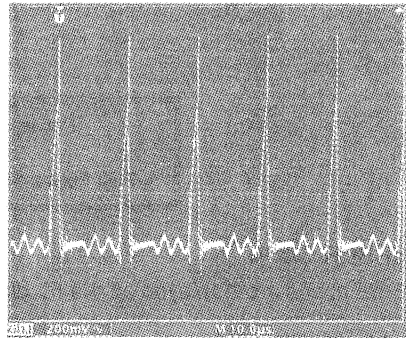


4 200mV 10μsec

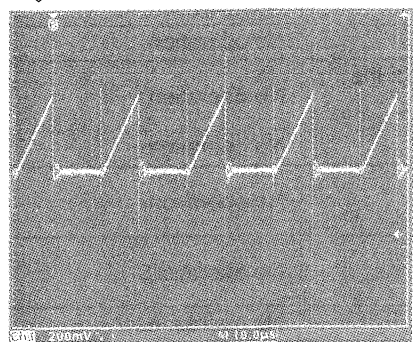


4 200mV 10μsec

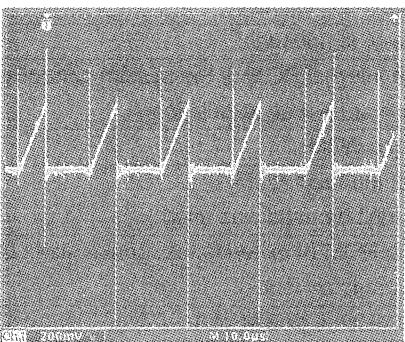


4 100mV 10μsec

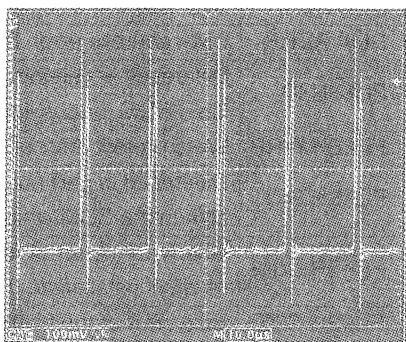


1.8 WIRING DIAGRAM

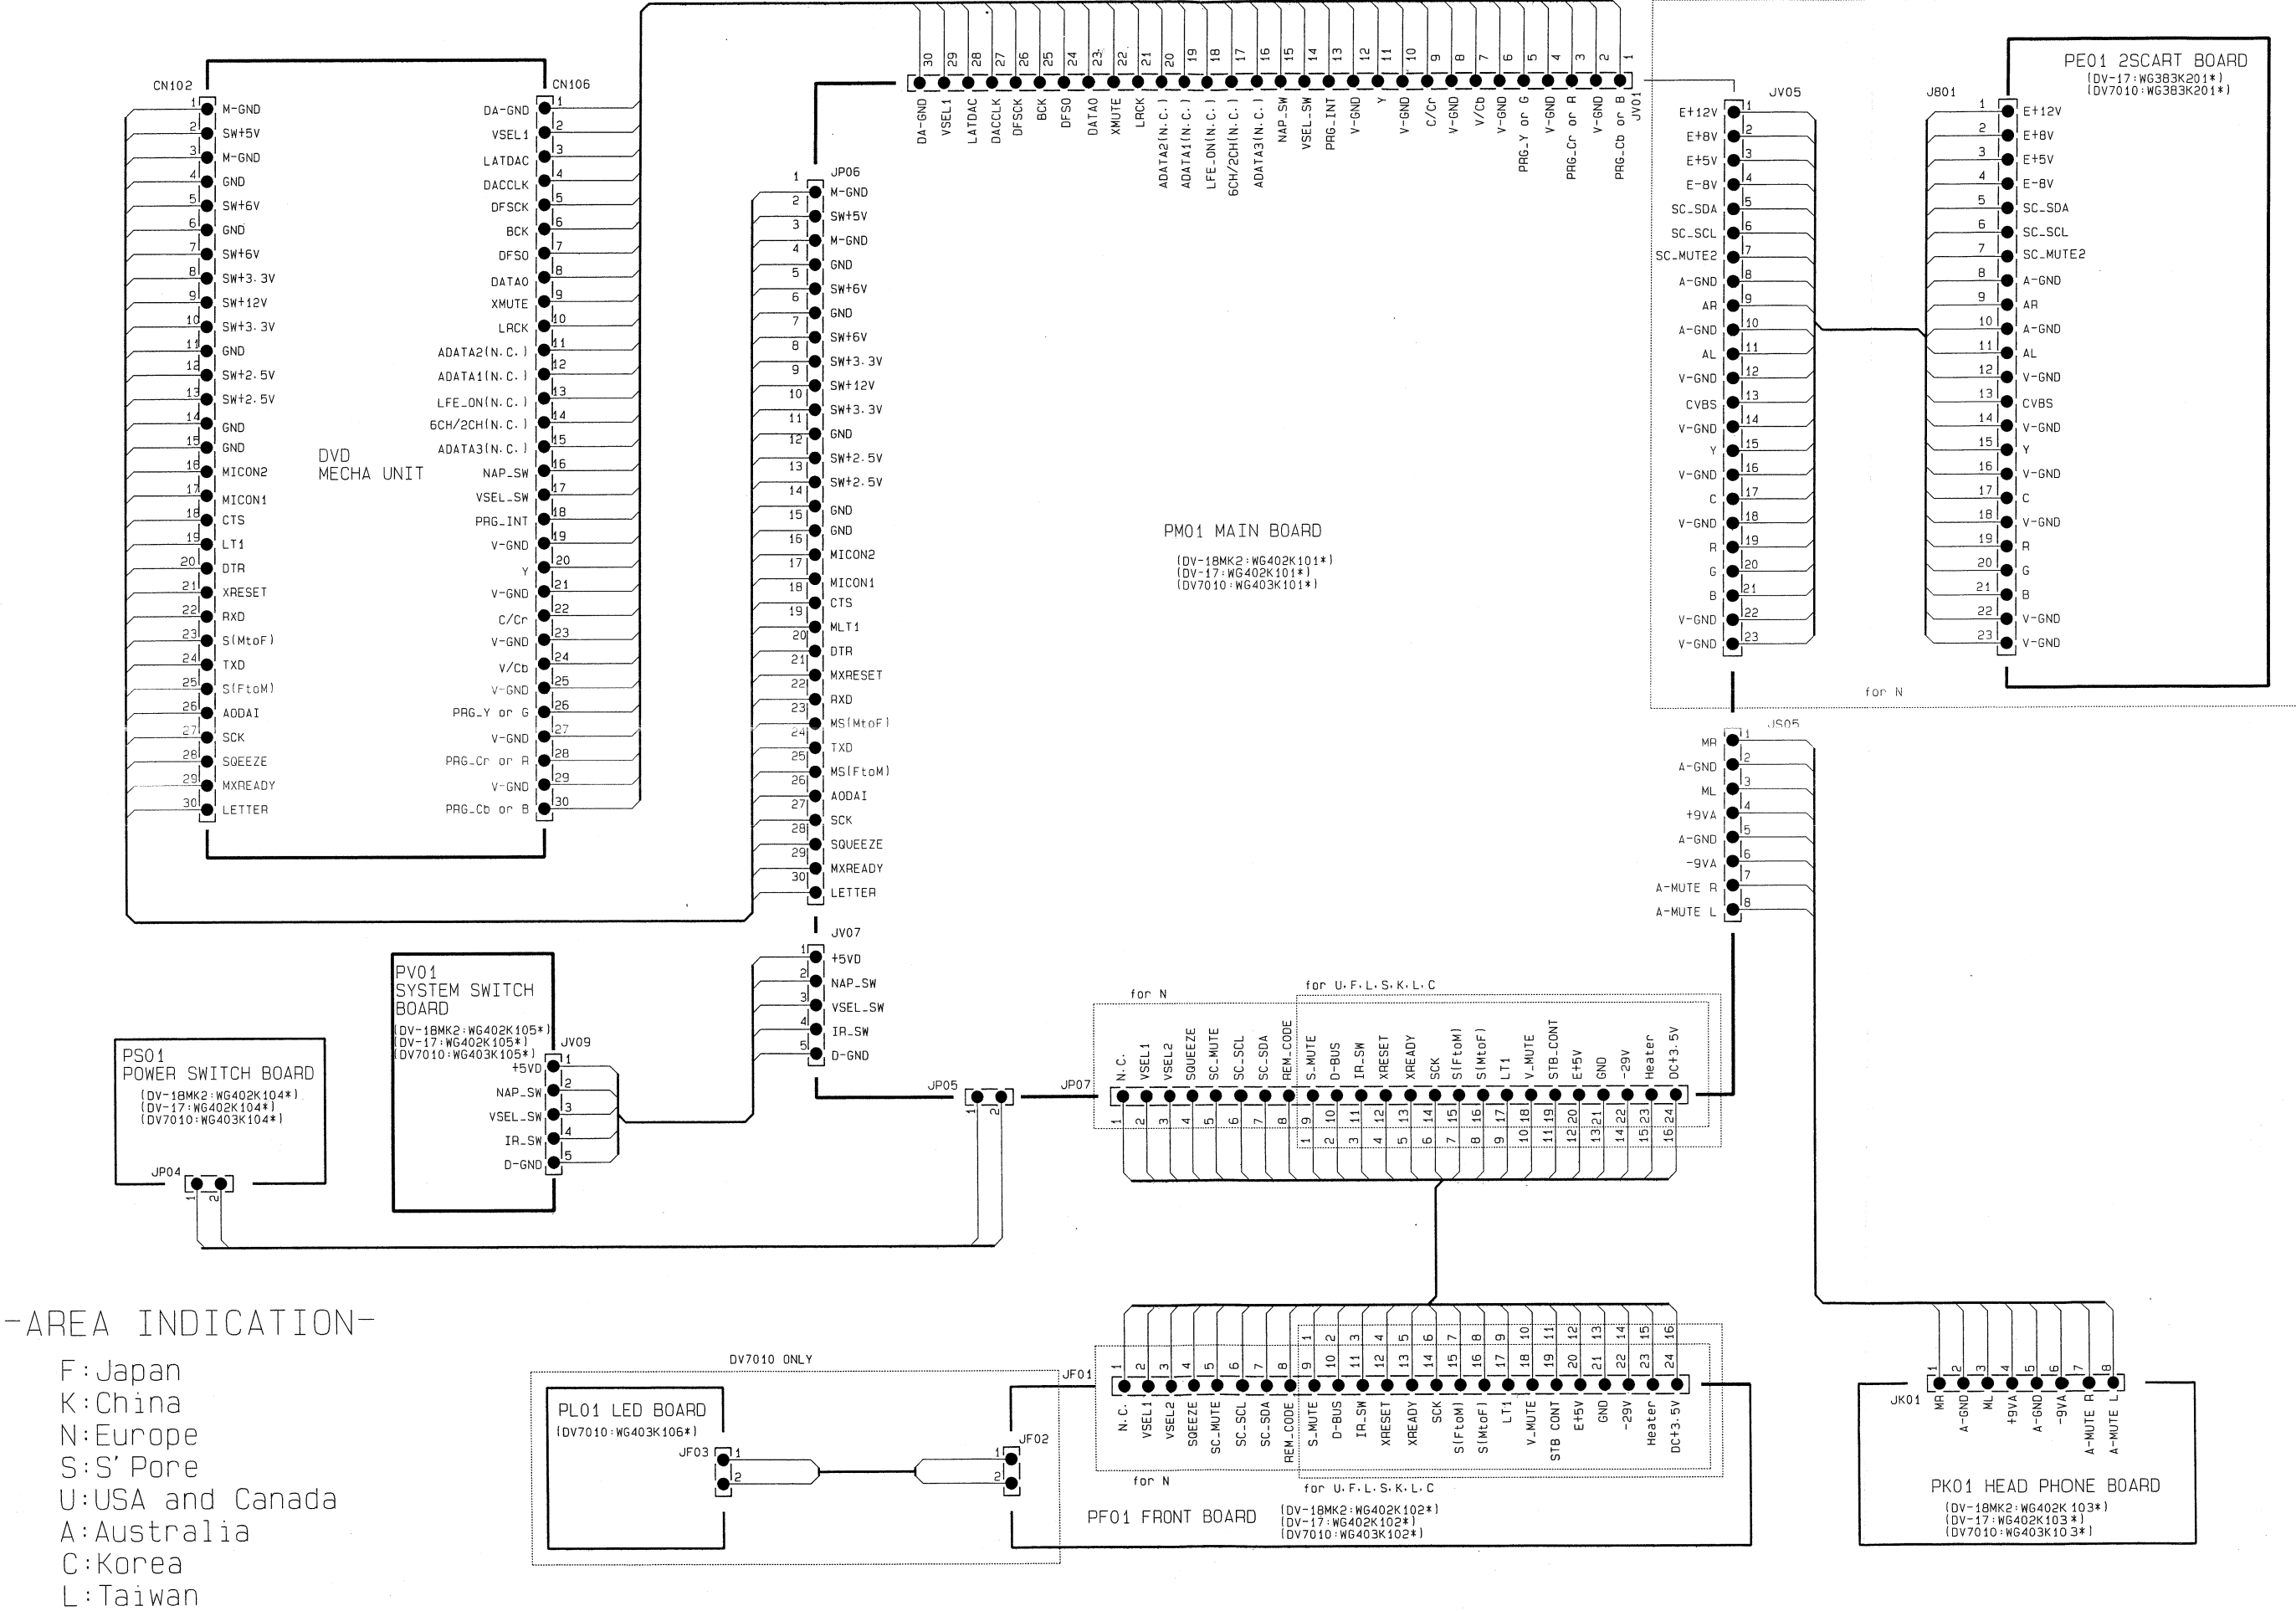

1.9 BLOCK DIAGRAM

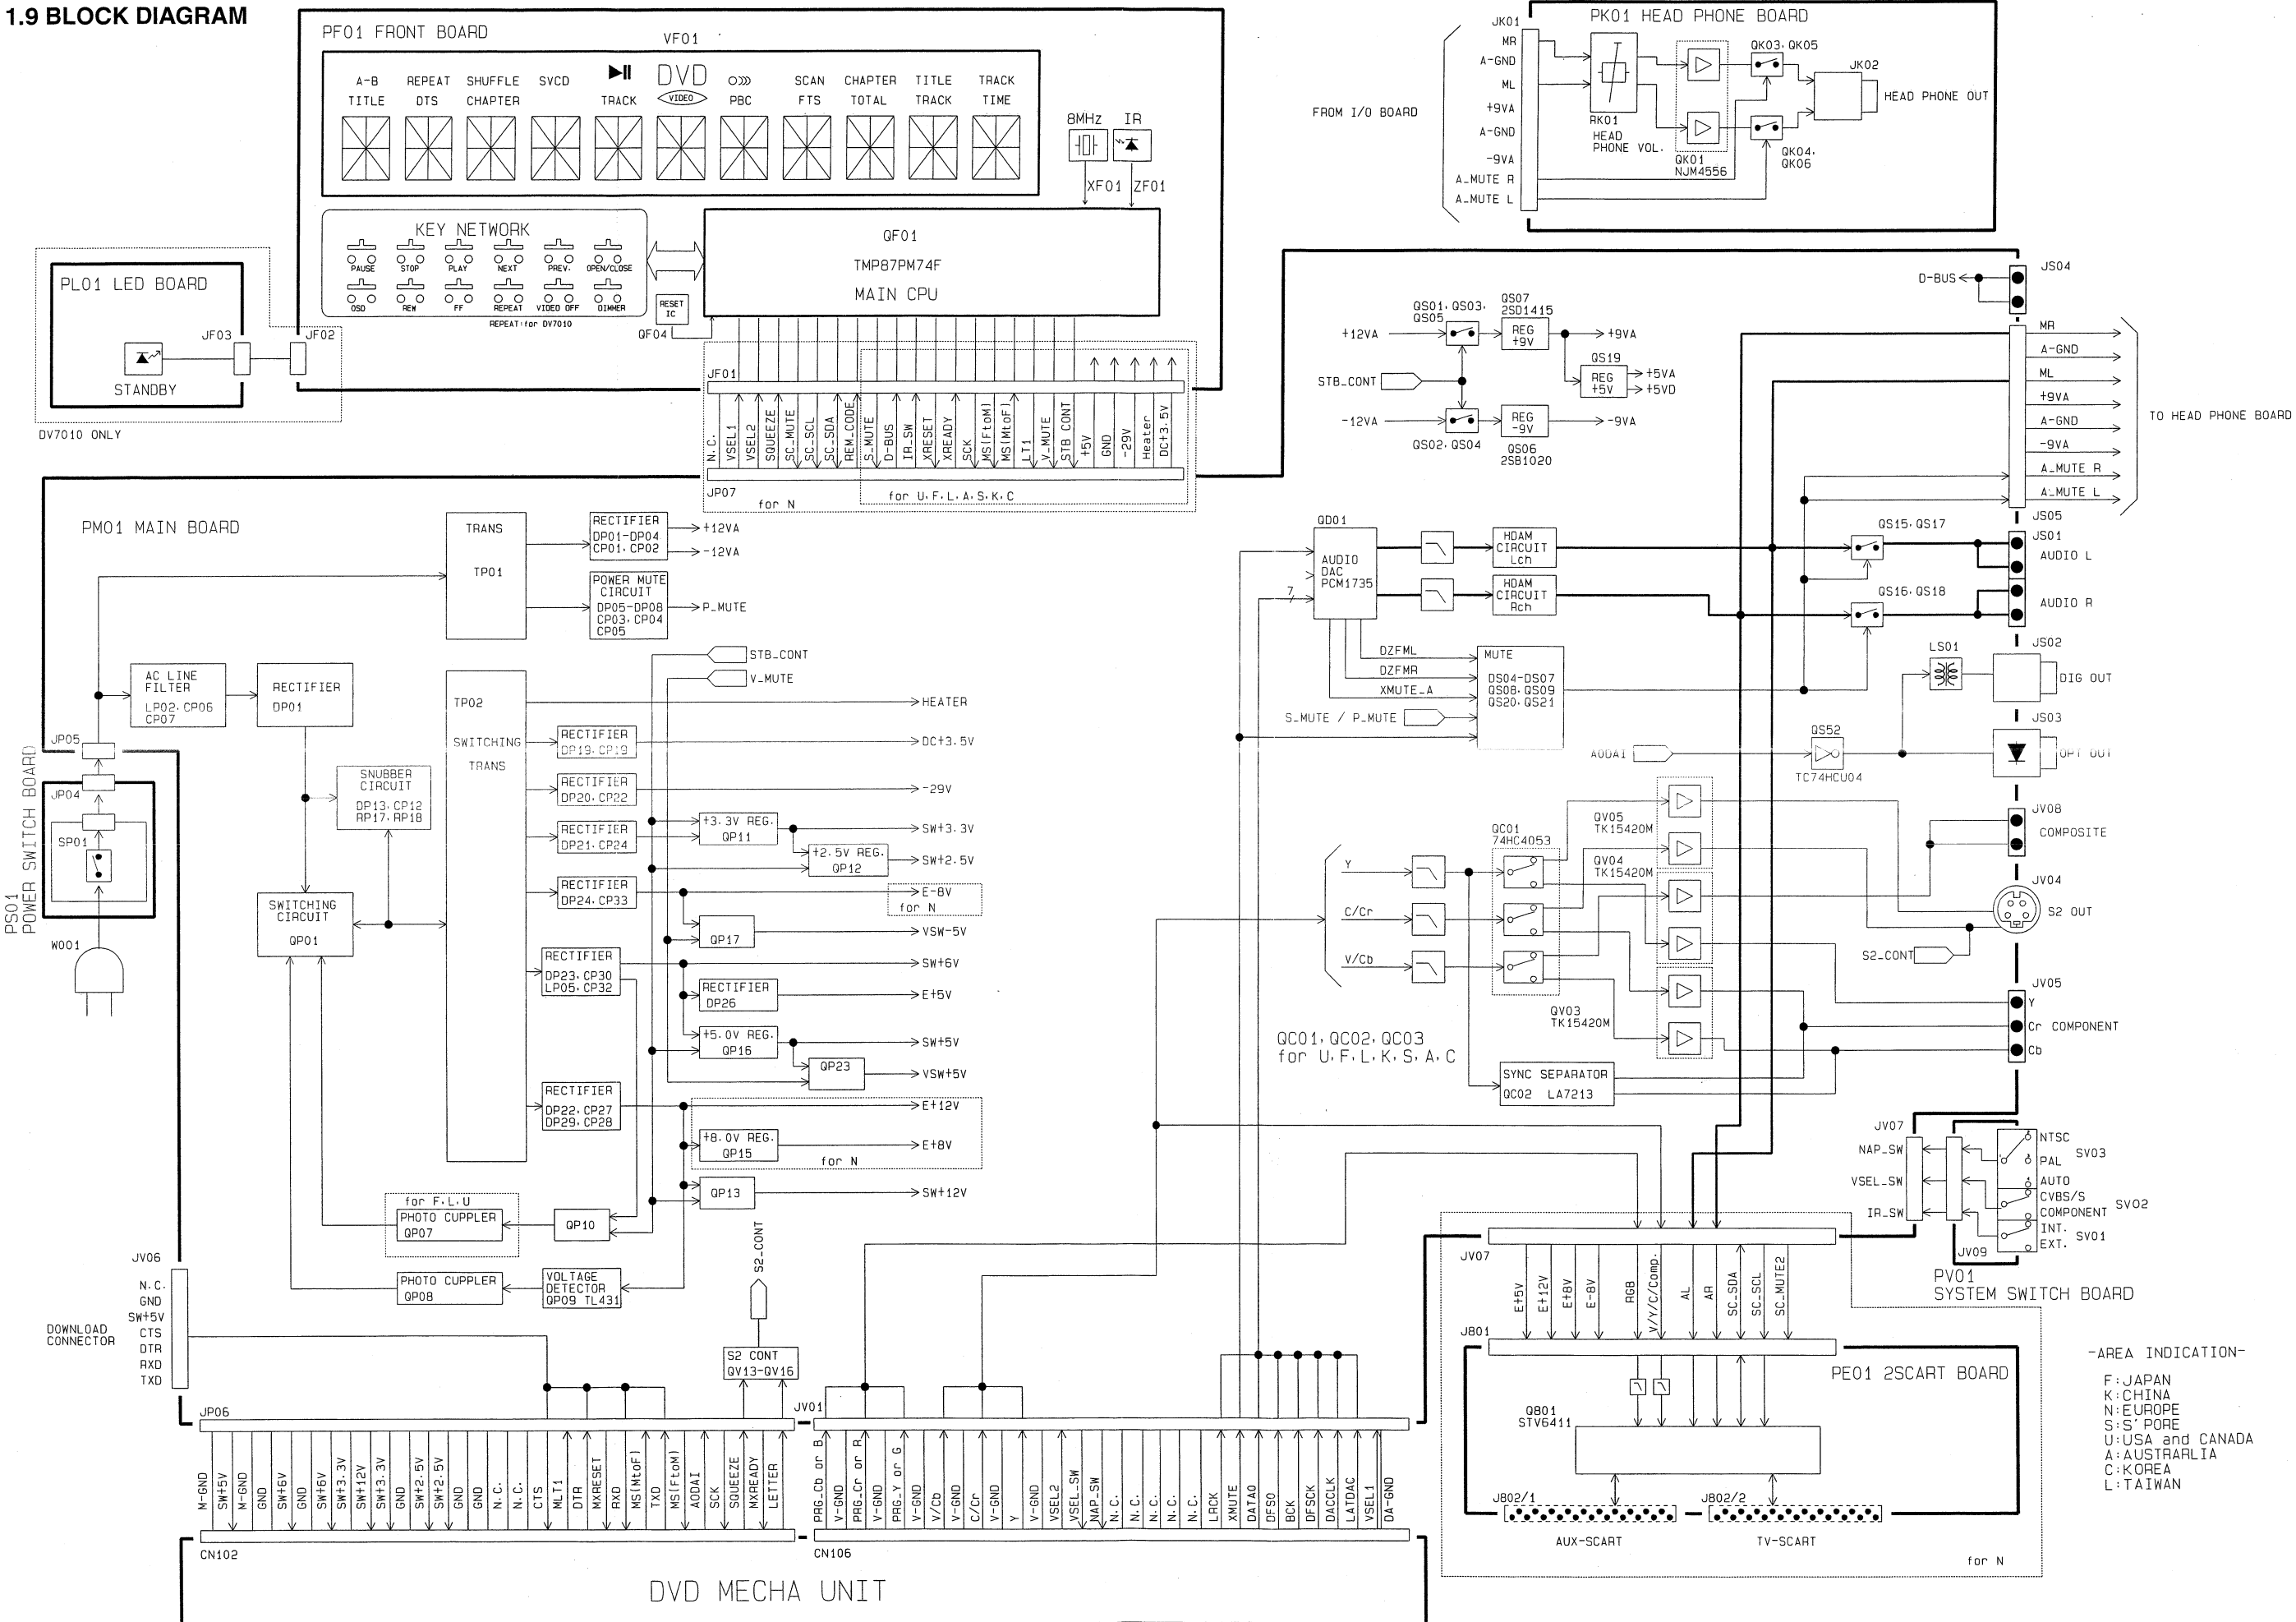

1.10 SCHEMATIC DIAGRAM AND PARTS LOCATION

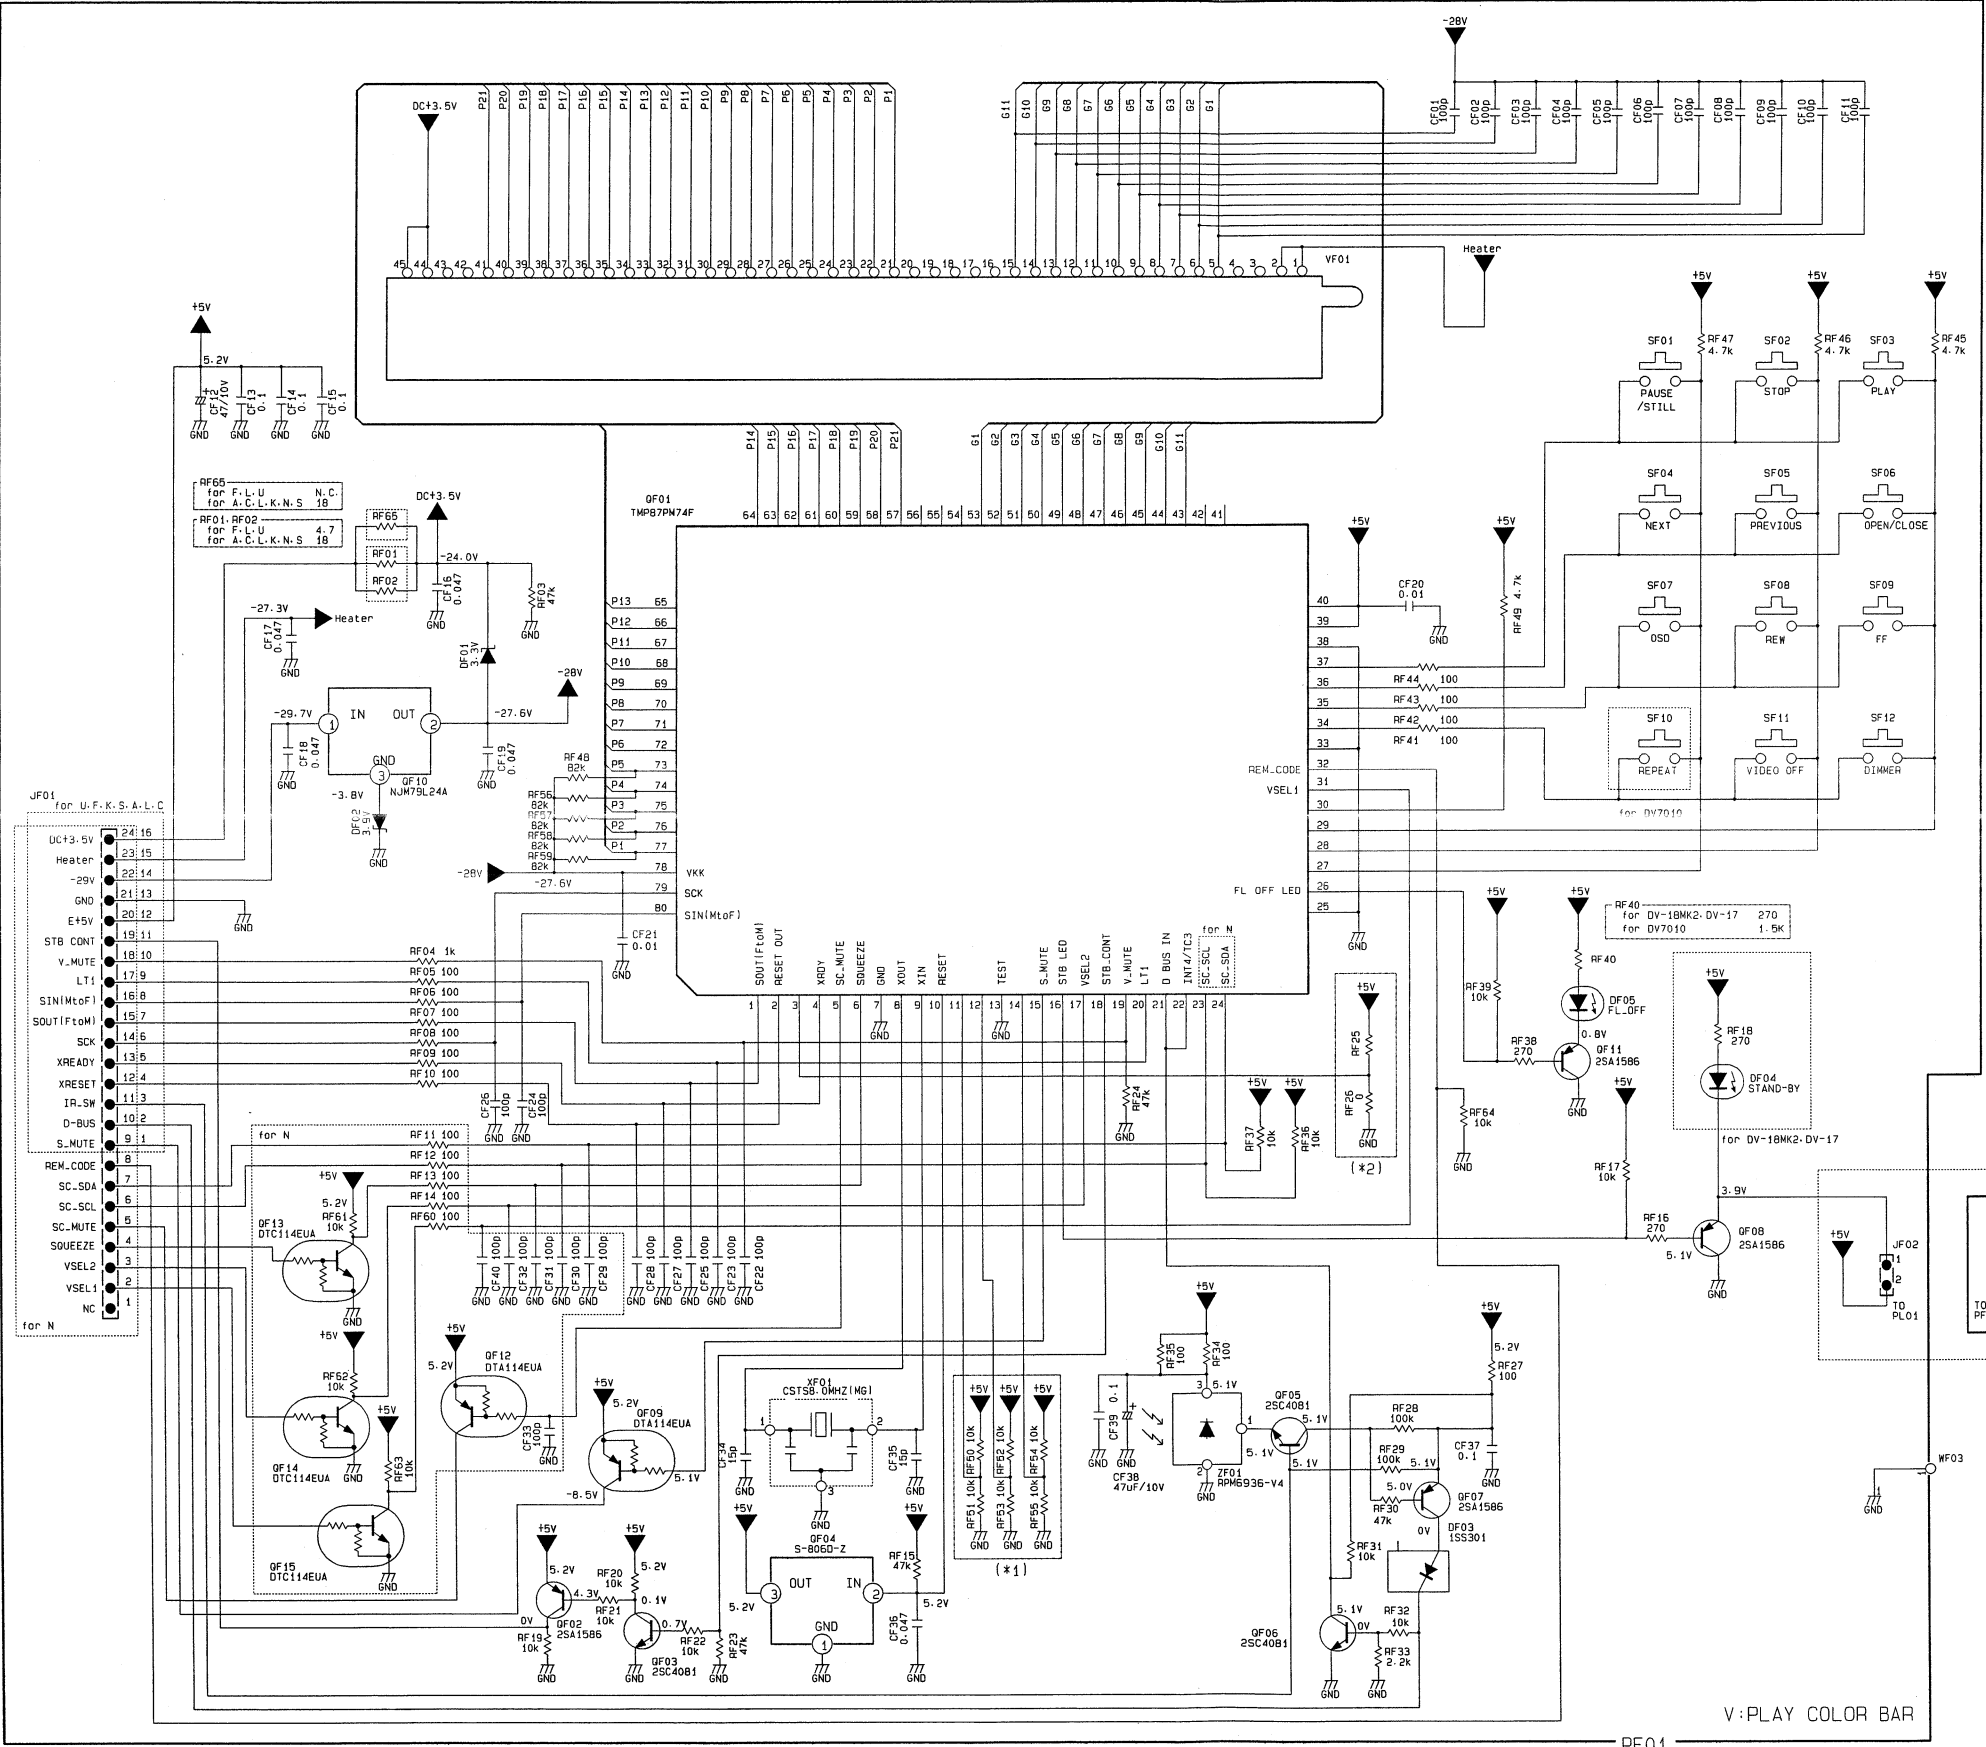

(*1)
QF01 Pin No. 11, 12, 14 SETTING

Region	Distination	Pin No. MS1	11	12	14
2	JAPAN	0	L	L	L
1	USA	1	H	L	L
4	AUS	2	L	H	L
3	ASIA2	2	H	H	L
2	EURO	4	L	L	H
5	Rusia, East Euro	5	H	L	H
3	ASIA1	6	L	H	H
6	CHINA	6	H	H	H

(*2)
QF01 Pin No.3 SETTING

DV7100	H
DV-18MK2 DV7010 DV-17	L


(*3)
QF01 Pin No.32
REMOTE CONTROL CODE SETTING


RC5 044	H
RC6 004	L

-AREA INDICATION-

F:Japan
K:China
N:Europe
S:S' Pore
U:USA and Canada
A:Australia
C:Korea
L:Taiwan


V:PLAY COLOR BAR

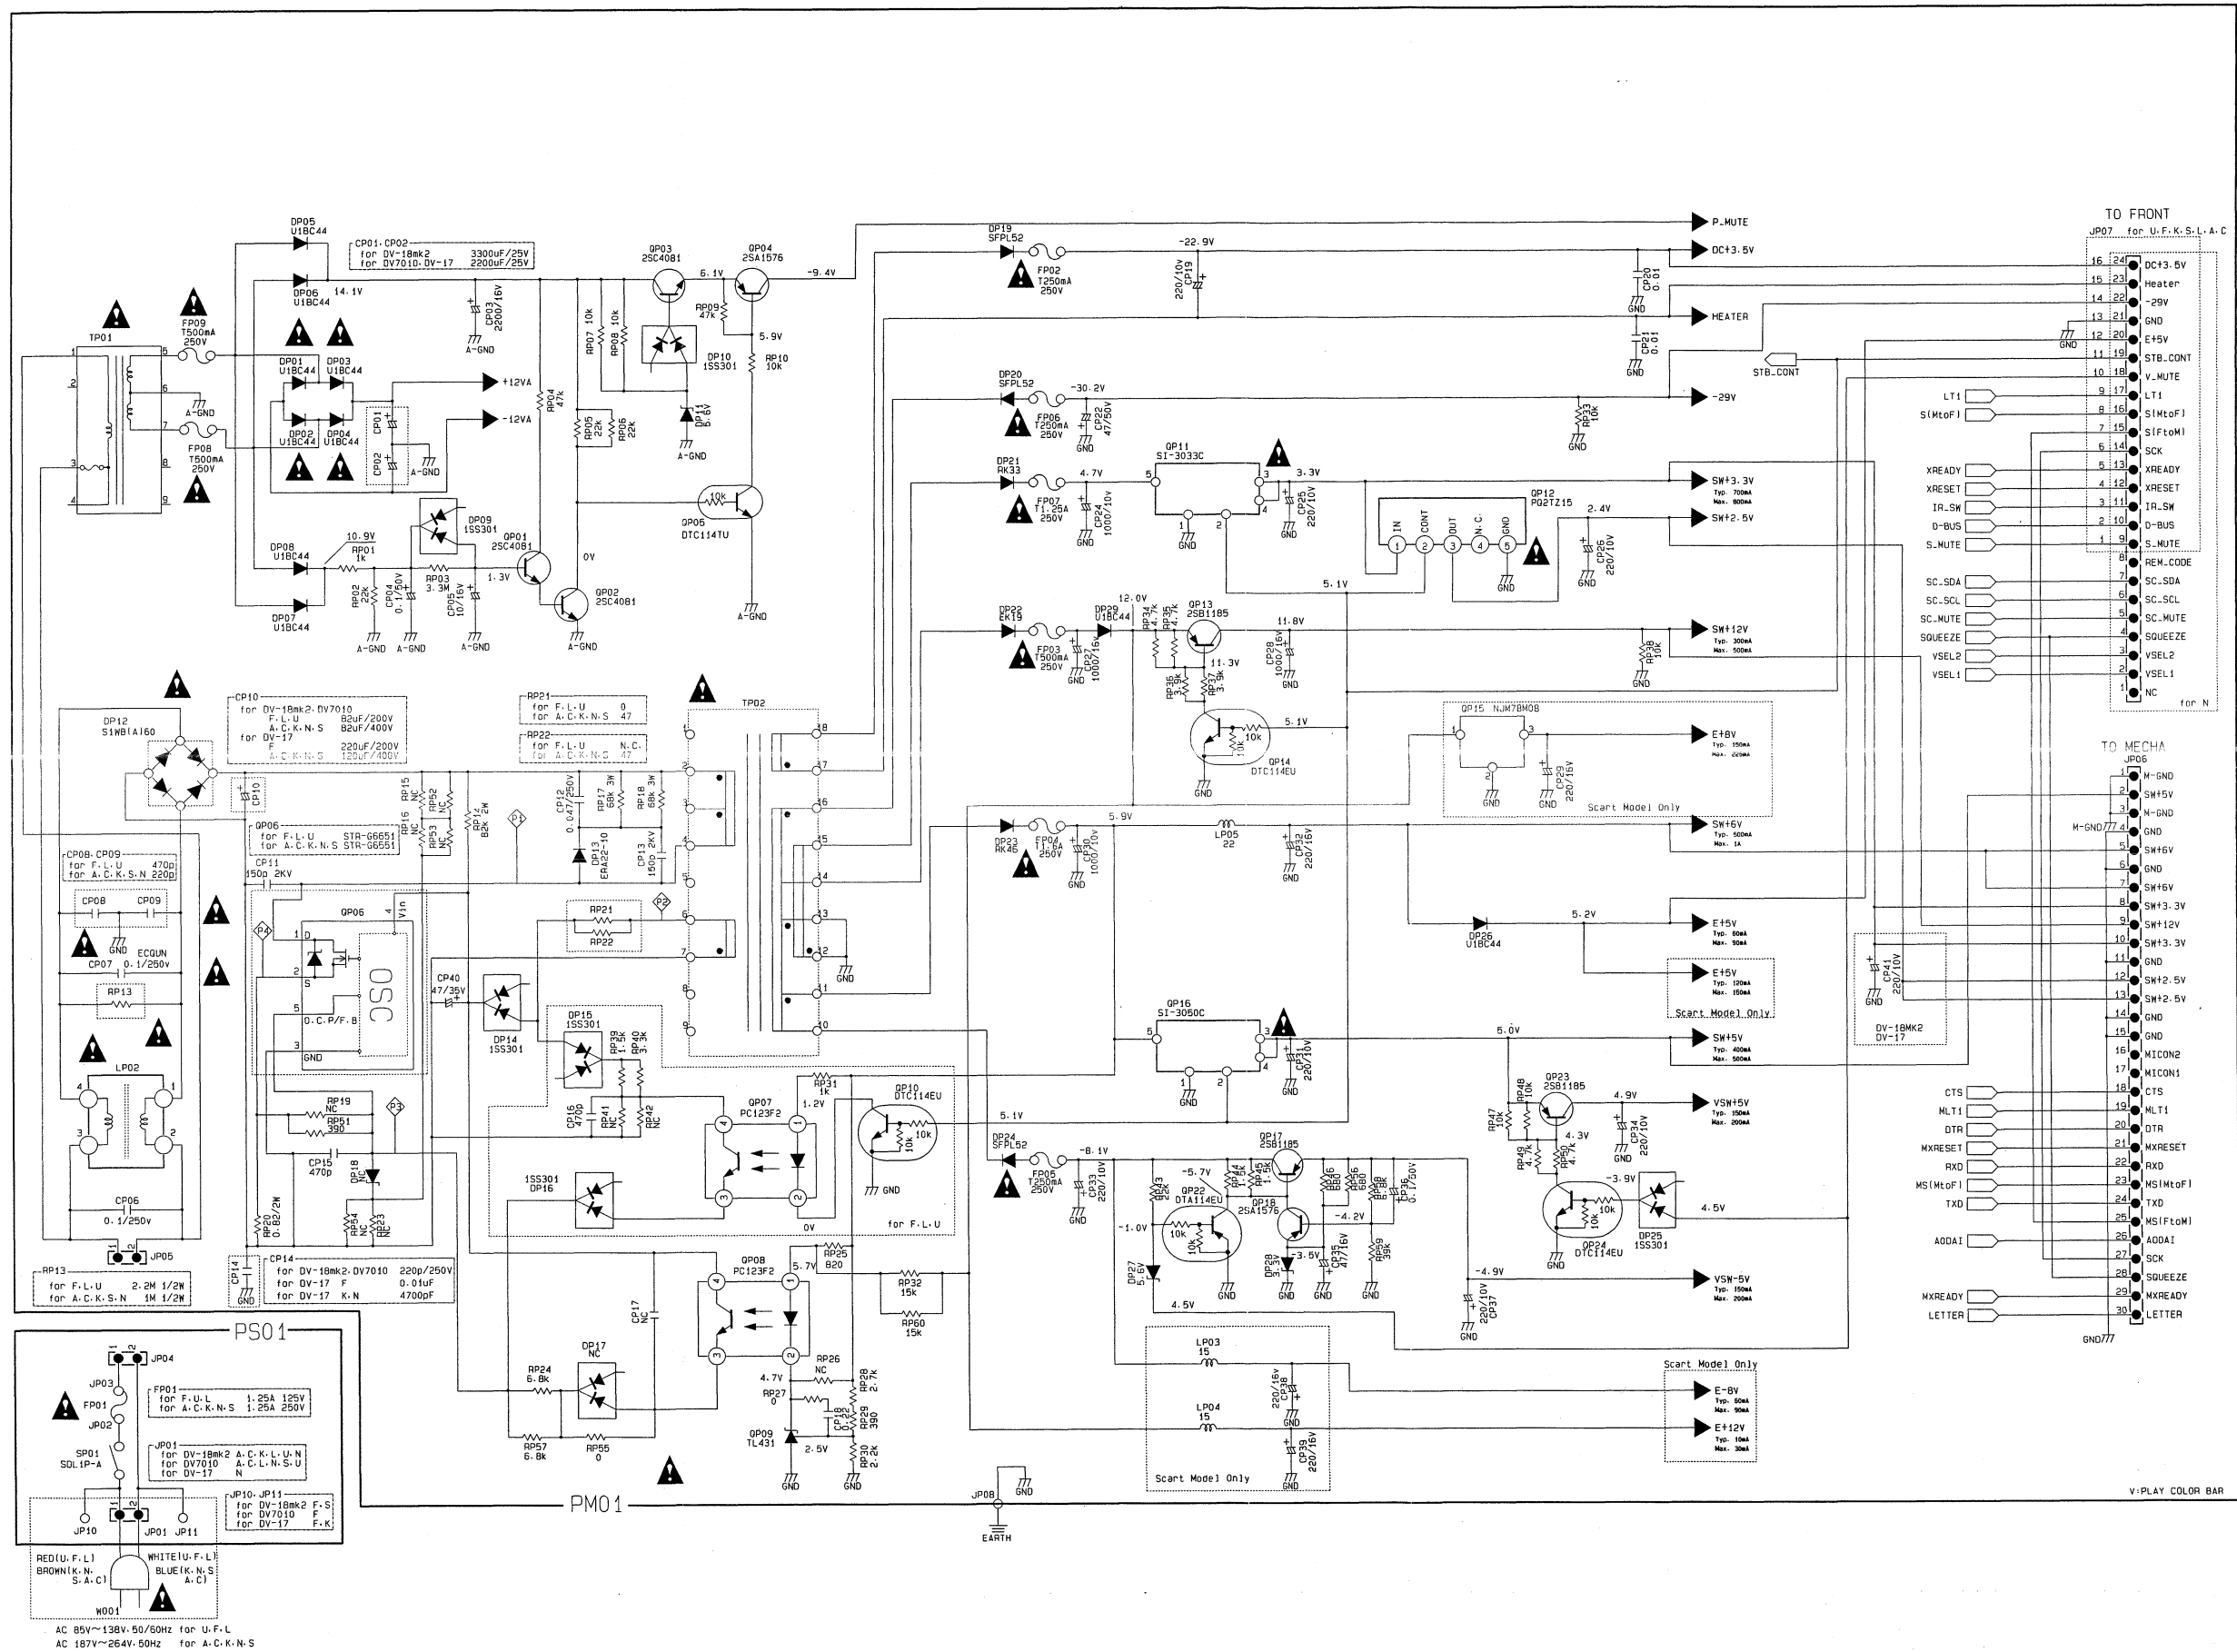

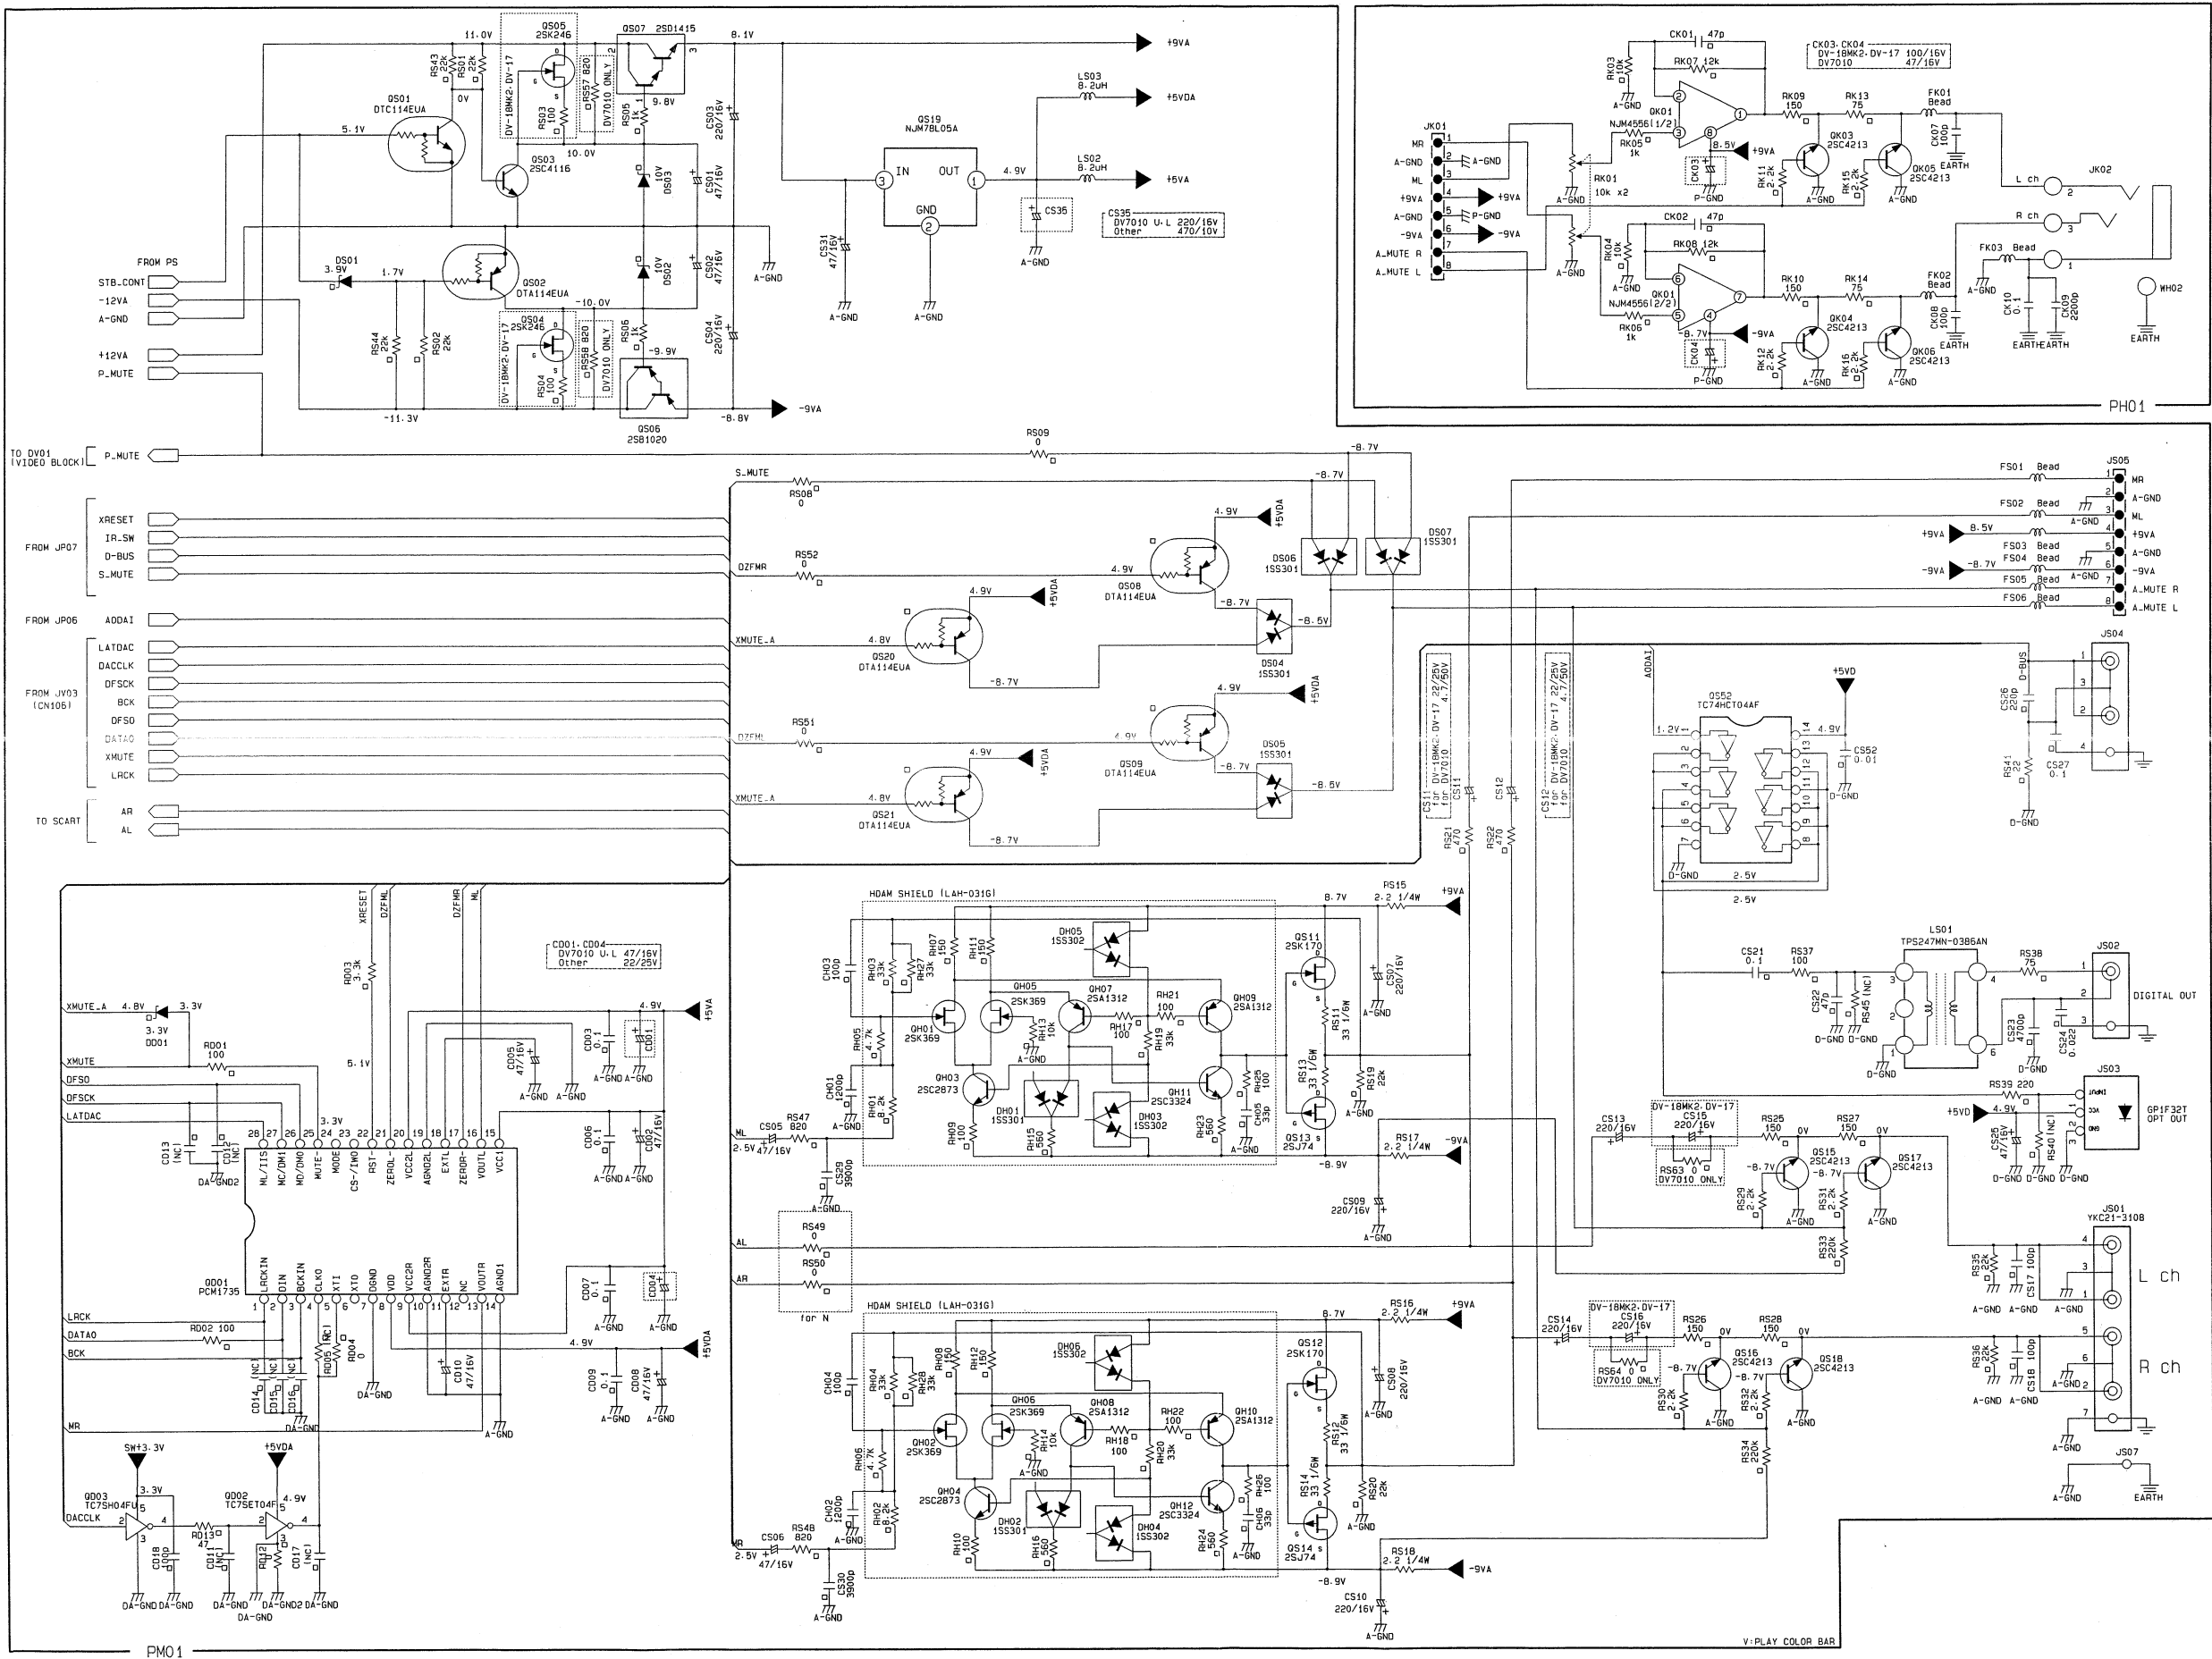



1.11 PARTS LOCATION
DV7010

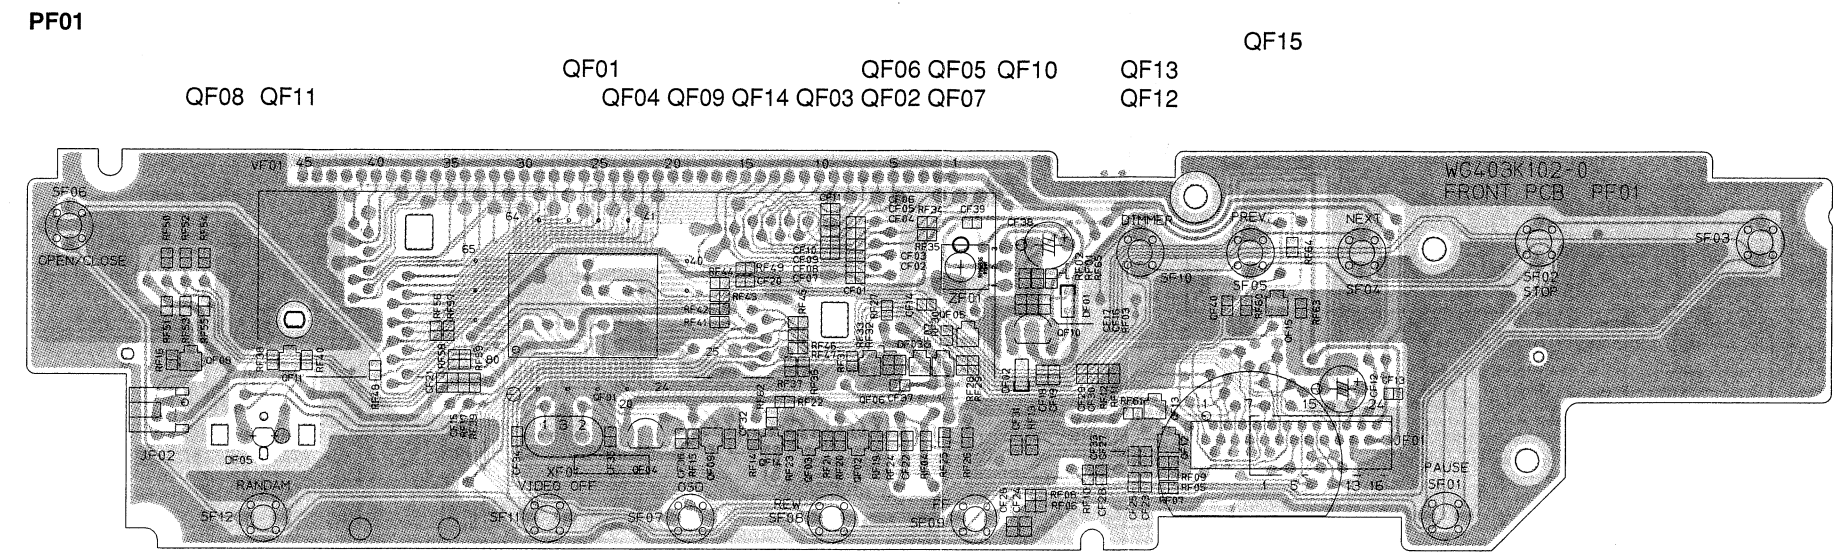


PF01

QF08 QF11

QF01
QF04


QF05 QF07
QF06 QF03 QF09
QF13 QF12 QF15 QF02 QF14

QF10

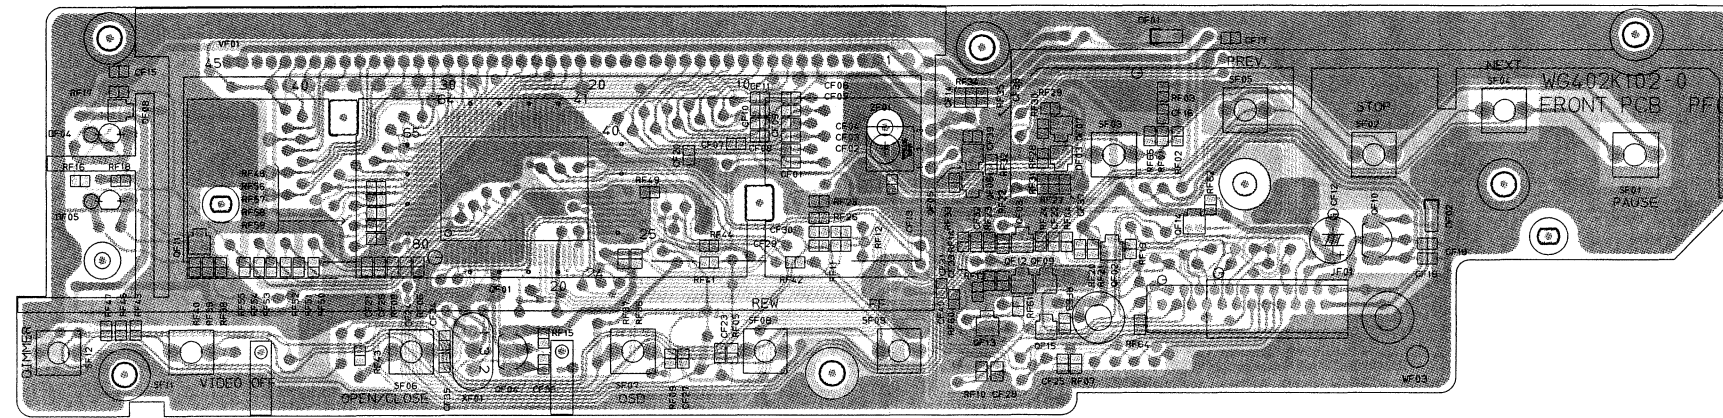


PK01


QK03 QK05
QK01 QK04 QK06

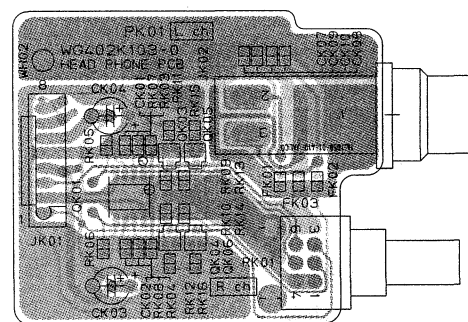

PV01

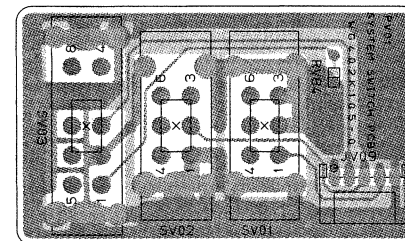

FP01

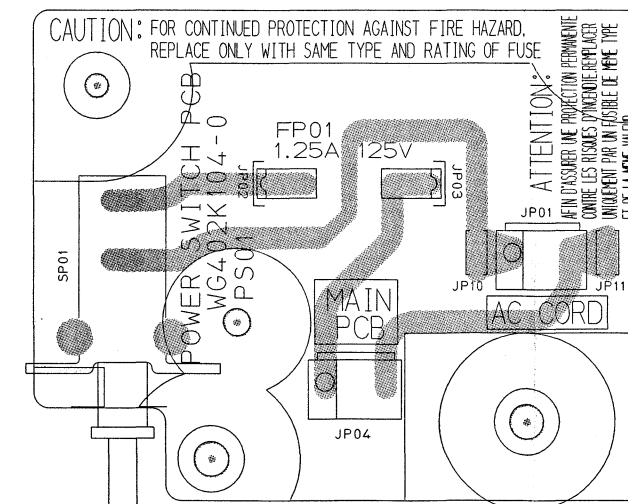

PM01

QP01 - QP05


QS06 QS07
QS01 - QS04

QP07 - QP10

QS19 QP06 QD01 QS08 QS09 QS20 QS21
QH04 QH02 QH06 QH05 QH01 QH03
QH10 QH12 QH08 QH07 QH11 QH09
QS14 QS12 QS11 QS13
QS15 - QS18

QP11 - QP17 QV50 QV51

QV13 - QV16 QP23 QP24 QD03
QV07 QV17 QV06 QV02 QV11
QV18 QC09 - QC11 QV03 QV12
QC12 QC01 QV01 QV10
QC04 - QC09 QC13 QC08 QC02 QS52

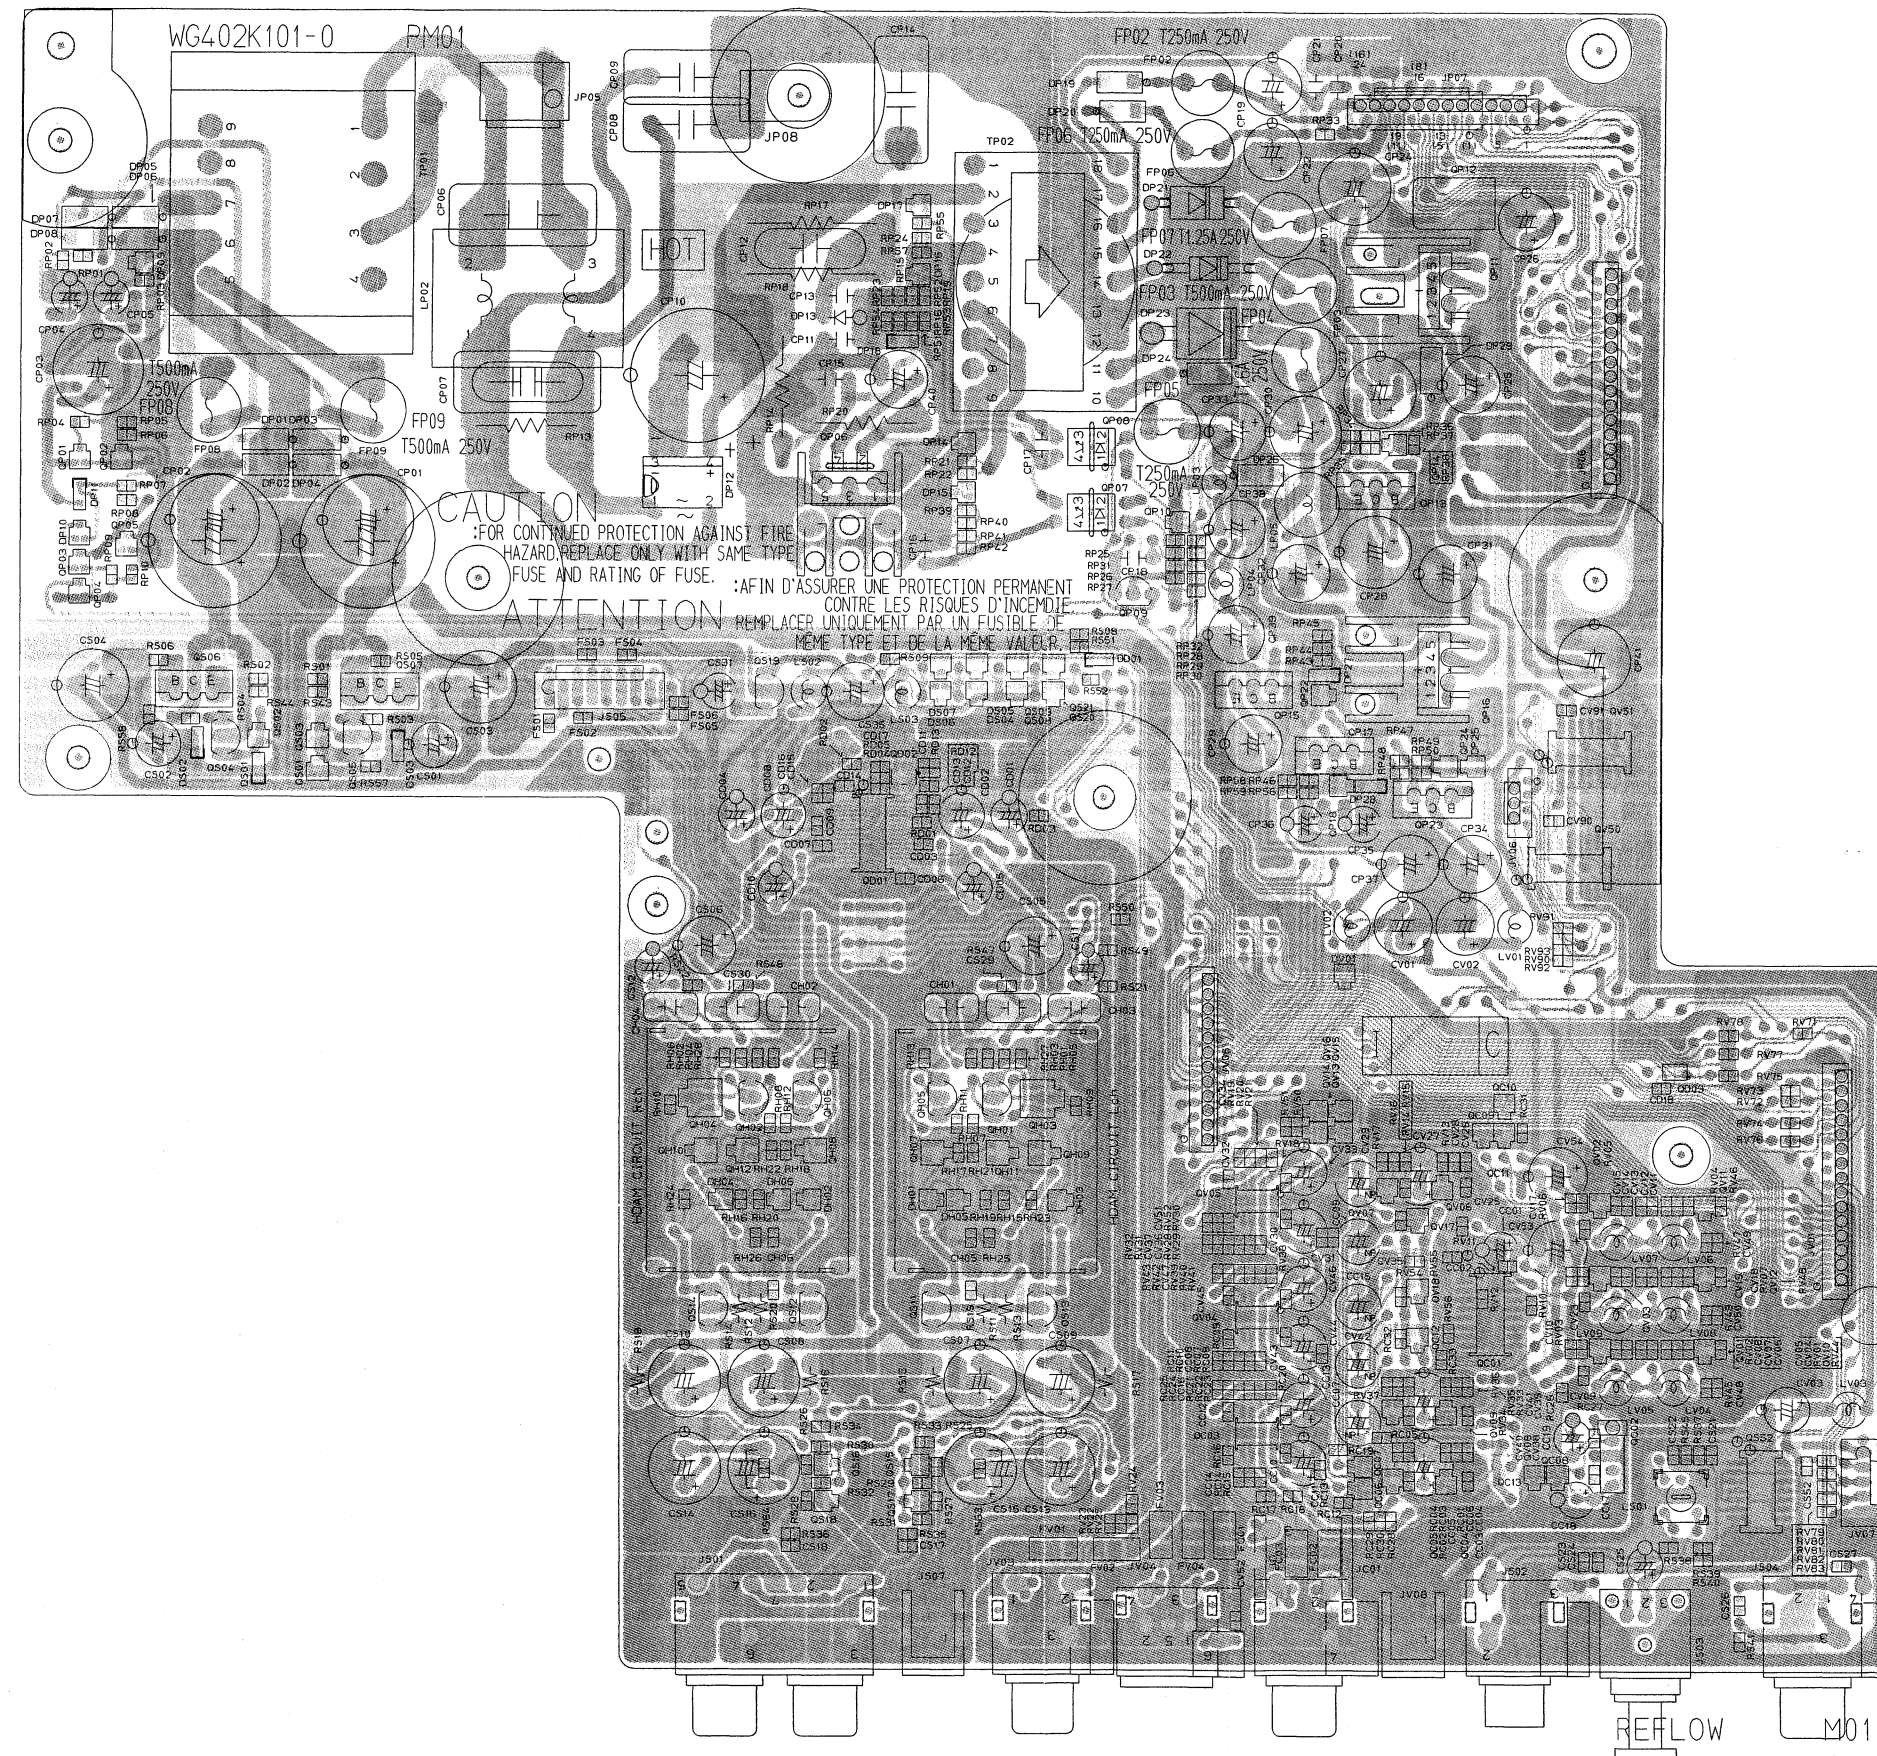

Q952 - Q955
Q956 - Q959
Q960-Q962


Q823

Q819 - Q821
Q808
Q809

Q801

Q814
Q815 - Q818

Q802 Q803 Q804 Q805 Q806 Q807

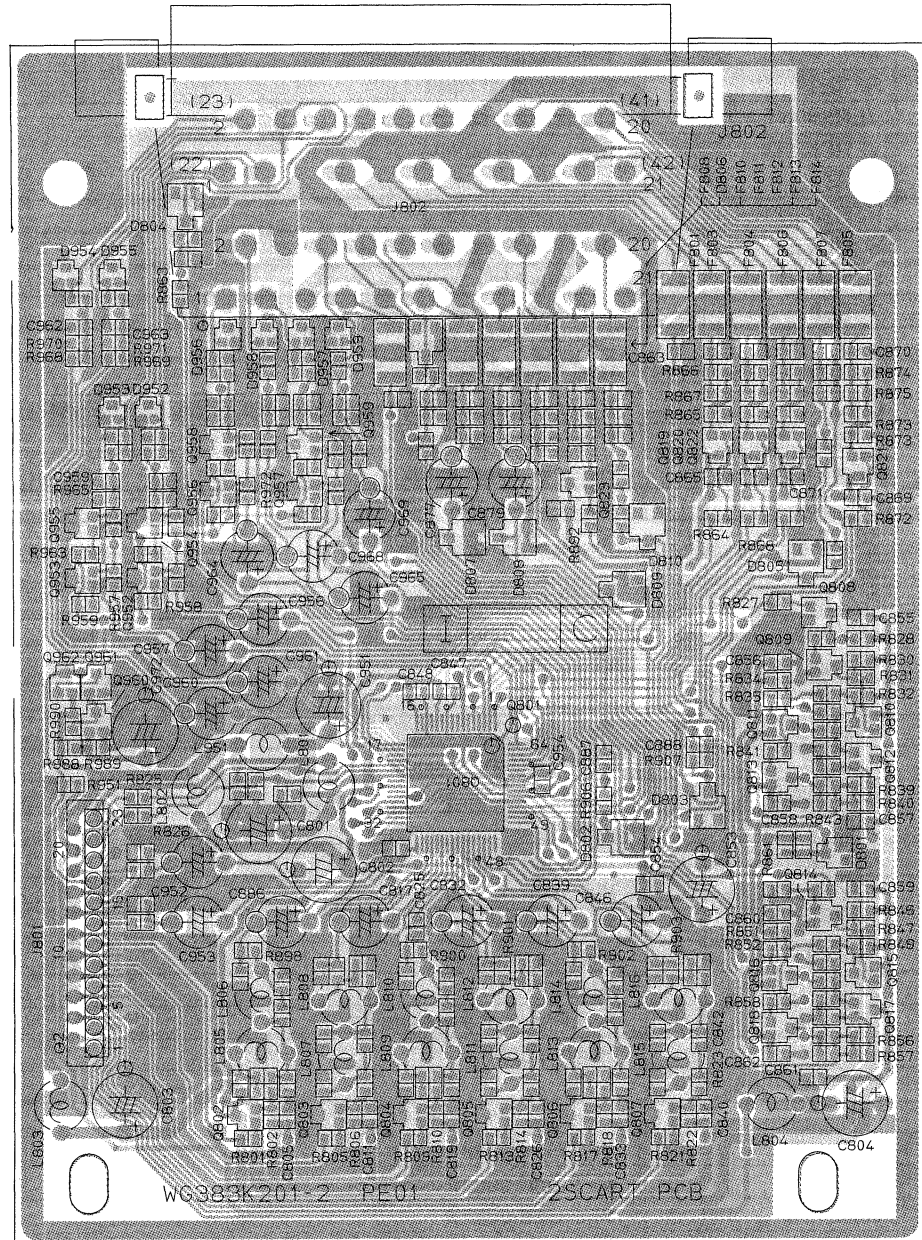


1.12 MICROPROCESSOR AND IC DATA

TMP87CH74

Pin No.	Port Name	I/O	FUNCTION
1	S OUT(F to M)	O	Serial data out put for Mecha unit
2	RESET_OUT	O	Reset signal for Mecha unit L:Reset
3	MODEL	I	GND
4	XRDY	O	Communication handshake line for Mecha unit d
5	SC_MUTE	O	Audio mute control for Scart L:Mute
6	SQUEEZE	I	16:9 squeeze signal from Mecha unit L:16:9, H:4:3
7	VSS		GND
8	XOUT	O	8MHz Osillater connecting
9	XIN	I	8MHz Osillater connecting
10	RESET	I	Reset signal input L:Reset
11	VERSION1	I	Destination setting
12	VERSION2	I	Destination setting
13	TEST		
14	VERSION3	I	Destination setting
15	S_MUTE	O	Audio mute control L:Mute
16	STB_LED	O	Standby LED control L:Standby
17	VSEL2	I	Video switching signal for Scart
18	STB_CONT	O	Standby control signal for Mecha unit L:Standby
19	V_MUTE	O	Video mute signal L:Mute
20	LT1	I	Communication response signal input from Mecha unit L:Busy, H:Ready
21	D_BUS_IN	I	Remote signal input
22	INT4/TC3	I	Remote signal input
23	SC_SCL	O	Serial clock output (I2C)
24	SC_SDA	I/O	Serial data input/output (I2C)
25	GND		
26	FL_OFF_LED	O	FL OFF LED control L:Standby
27	KEY IN0	I	Key scan input
28	KEY IN1	I	Key scan input
29	KEY IN2	I	Key scan input
30	Reserve	I	Reserve (5V)
31	VSEL1	I	Video switching signal for Scart
32	REM_CODE	I	Remote code setting
33	GND		GND
34	KEY OUT0	O	Key scan output
35	KEY OUT1	O	Key scan output
36	KEY OUT2	O	Key scan output
37	KEY OUT3	O	Key scan output
38	GND		GND
39	+5V	I	A/D Reference voltage
40	+5V		Power supply
41	NC		
42	NC		
43	G11	O	VFT Grid output
44	G10	O	VFT Grid output
45	G9	O	VFT Grid output
46	G8	O	VFT Grid output
47	G7	O	VFT Grid output
48	G6	O	VFT Grid output
49	G5	O	VFT Grid output
50	G4	O	VFT Grid output
51	G3	O	VFT Grid output
52	G2	O	VFT Grid output
53	G1	O	VFT Grid output
54	NC		
55	NC		
56	NC		
57	P21	O	VFT Segment output
58	P20	O	VFT Segment output

Pin No.	Port Name	I/O	FUNCTION
59	P19	O	VFT Segment output
60	P18	O	VFT Segment output
61	P17	O	VFT Segment output
62	P16	O	VFT Segment output
63	P15	O	VFT Segment output
64	P14	O	VFT Segment output
65	P13	O	VFT Segment output
66	P12	O	VFT Segment output
67	P11	O	VFT Segment output
68	P10	O	VFT Segment output
69	P9	O	VFT Segment output
70	P8	O	VFT Segment output
71	P7	O	VFT Segment output
72	P6	O	VFT Segment output
73	P5	O	VFT Segment output
74	P4	O	VFT Segment output
75	P3	O	VFT Segment output
76	P2	O	VFT Segment output
77	P1	O	VFT Segment output
78	VKK		VFT Powewr supply
79	SCK	O	Serial clock output for Mecha unit
80	SIN(M to F)	I	Serial data input from Mecha unit

TMP87CH74

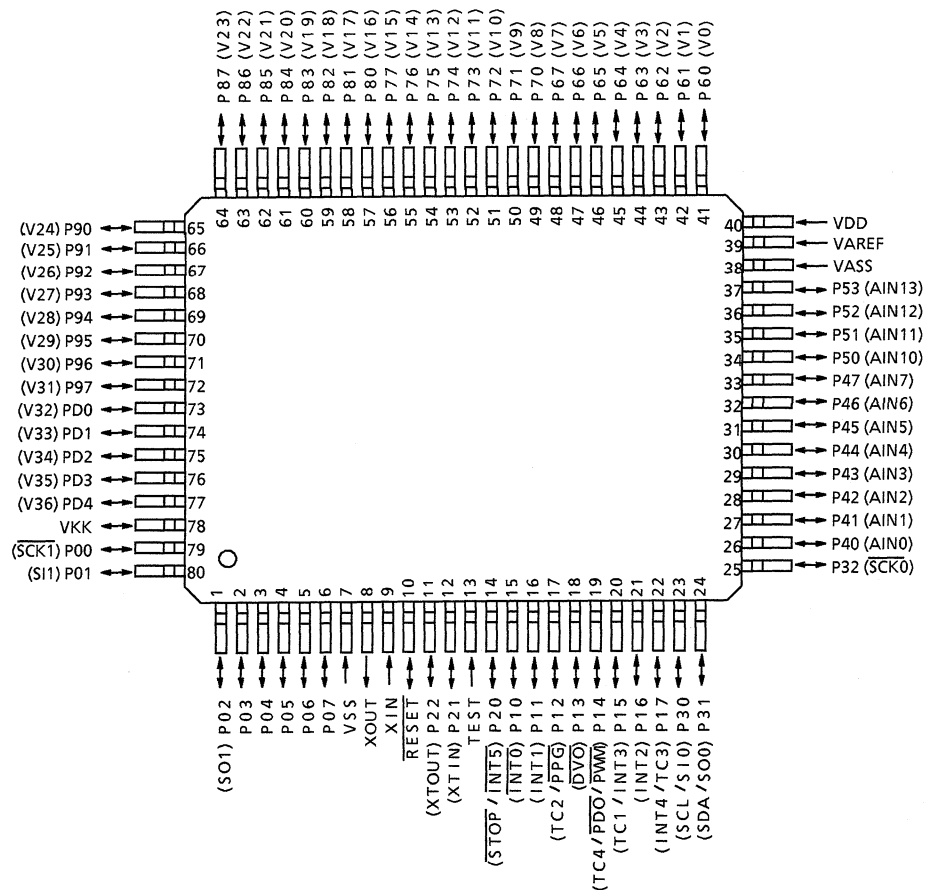

PCM1735


Pin No.	Port Name	I/O	FUNCTION
1	LRCK	I	LRCK Clock Input (fs). (1)
2	DATA	I	Serial Audio Data Input. (1)
3	BCK	I	Bit Clock Input for Serial Audio Data. (1)
4	CLKO	O	Buffered Output of System Clock.
5	XTI	I	Oscillator Input / External Clock Input.
6	XTO	O	Oscillator Output.
7	DGND	-	Digital Ground.
8	V _{DD}	-	Digital Power. + 5 V
9	V _{CC2R}	-	Analog Power. + 5V
10	AGND2R	-	Analog Ground.
11	EXTR	O	Rch, Common Pin of Analog Output Amp.
12	NC	-	Non Connection.
13	V _{OUTR}	O	Rch, Analog Voltage Output of Audio signal.
14	AGND1	-	Analog Ground.
15	V _{CC1}	-	Analog Power. + 5 V
16	V _{OUTL}	O	Lch, Analog Voltage Output of Audio signal.
17	ZEROR	O	Rch Zero Data Flag (Open Drain)
18	EXTL	O	Lch, Common Pin of Analog Output Amp
19	AGND2L	-	Analog Ground.
20	V _{CC2L}	-	Analog Power. + 5 V
21	ZEROL	O	Lch Zero Data Flag (Open Drain)
22	RST	I	Reset. When this pin is LOW, the DF & modulators are held in reset. (2)
23	CS / IWO	I	Chip Select / Input format selection. (3)
24	MODE	I	Mode Control Select. (H: Software, L: Hard ware) (2)
25	MUTE	I	Mute Control. (2)
26	MD / DM0	I	Mode Control, Data / De-emphasis selection 1. (2)
27	MC / DM1	I	Mode Control, BCK / De-emphasis selection 2. (2)
28	ML / IIS	I	Mode Control, WDCK / Input format selection. (2)

(1) Pins 1, 2, 3: Schmitt-trigger input.

(2) Pins 22, 24, 25, 26, 27, 28: Schmitt-trigger input with internal pull-up.

(3) Pin 23: Schmitt-trigger input with internal pull-down.


PCM1735

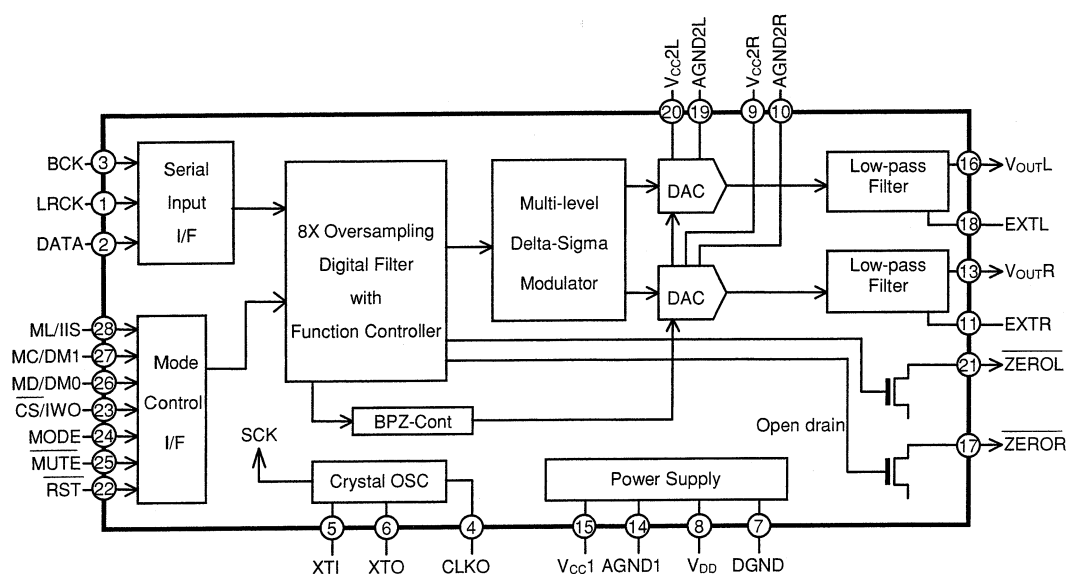



1.13 EXPLODED VIEW AND PARTS LIST
DV7010

SYMBOL	STYLE	PARTS NAME
5110		+B.H.M.SCREW
5126		+B.H.TAP TITE SCREW W/WASHER
5127		+P.H.TAP TITE SCREW(BTYPE)
5128		+B.H.TAP TITE SCREW(BTYPE)
5129		+B.H.TAP TITE SCREW(W/T.L.WASHER)

MARK	MATERIAL/FINISH
(M)	STEEL/COPPER
(U)	STEEL/BLACK

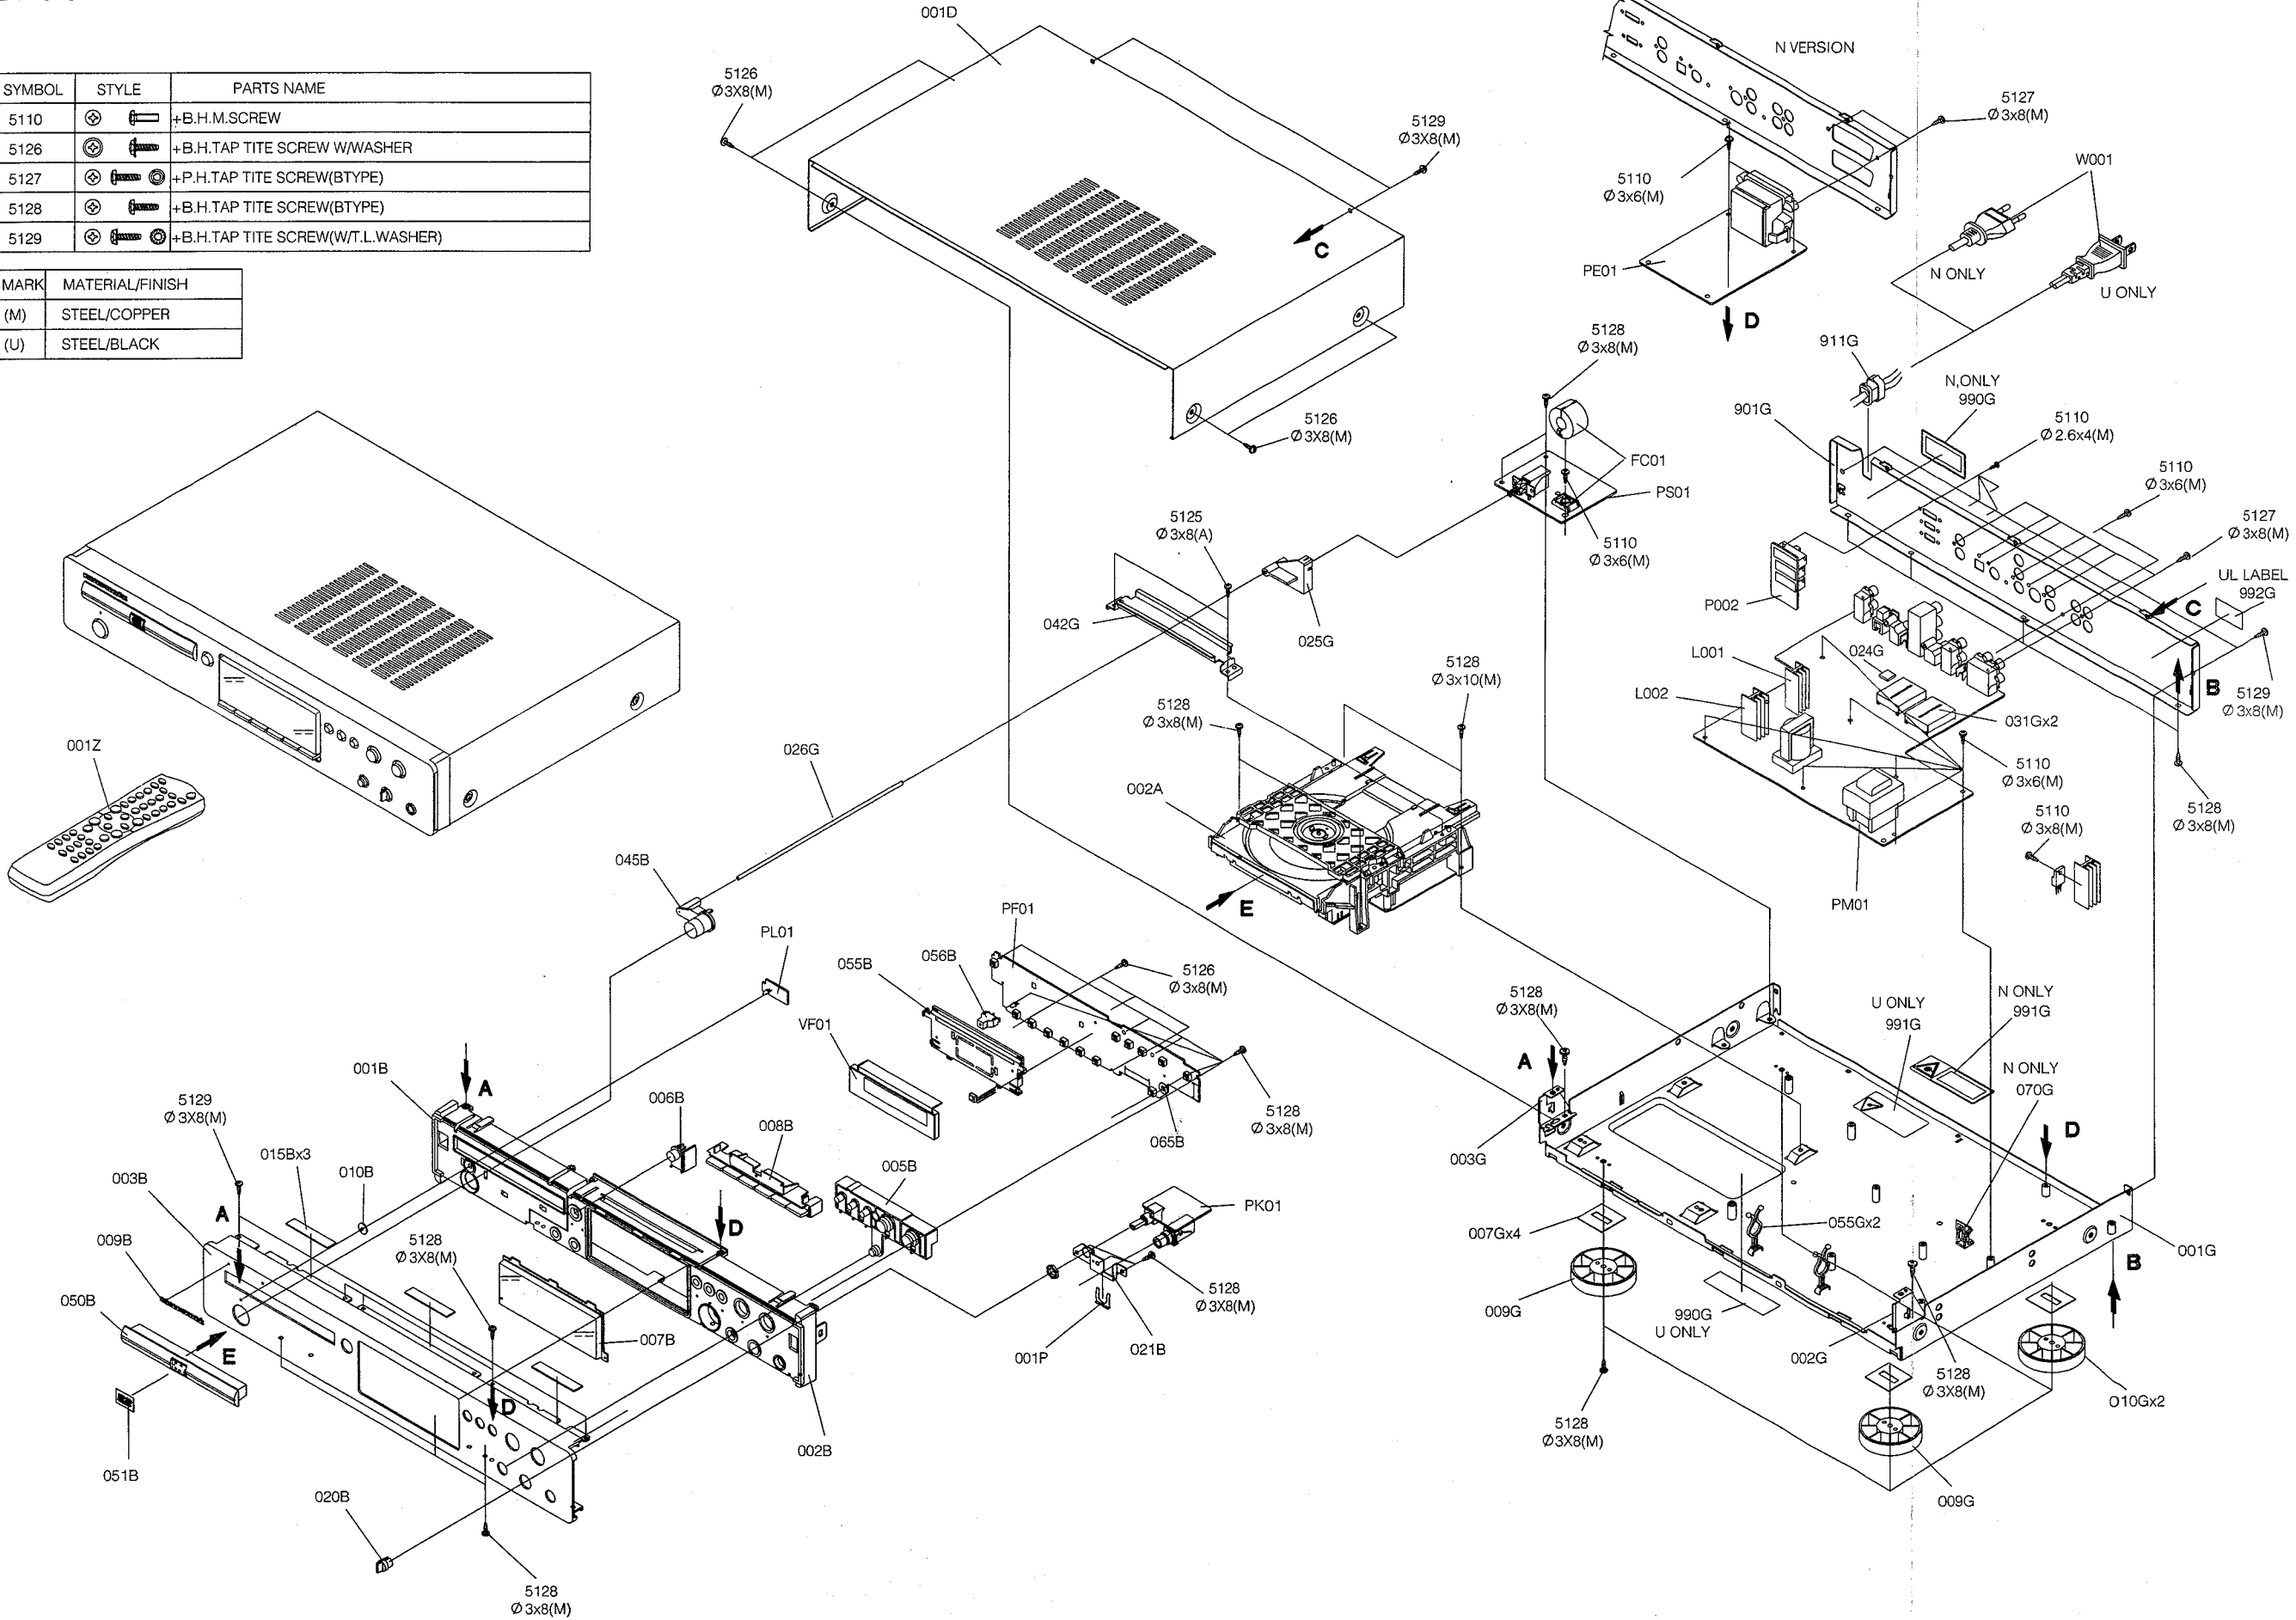


MARK	MATERIAL/FINISH
(M)	STEEL/COPPER
(U)	STEEL/BLACK
(A)	STEEL/CHROMATE

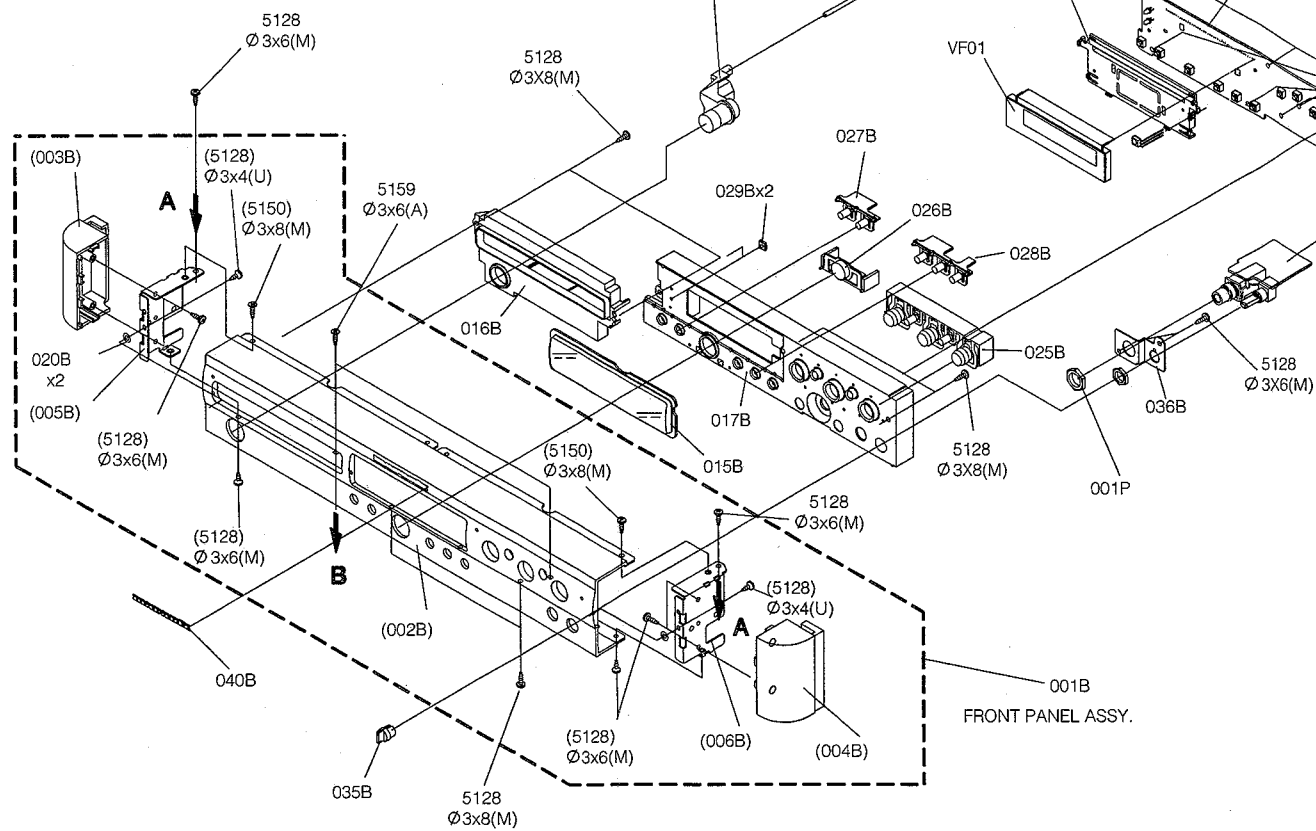

SYMBOL	STYLE	PARTS NAME
5110		+B.H.M.SCREW
5126		+B.H.TAP TITE SCREW W/WASHER
5127		+P.H.TAP TITE SCREW(BTYPE)
5128		+B.H.TAP TITE SCREW(BTYPE)
5129		+B.H.TAP TITE SCREW(W/T.L.WASHER)
5150		+F.H.TAP TITE SCREW(BTYPE)
5159		+B.H.TAP TITE SCREW(STYPE)

MARK	MATERIAL/FINISH
(M)	STEEL/COPPER
(U)	STEEL/BLACK
(A)	STEEL/CHROMATE

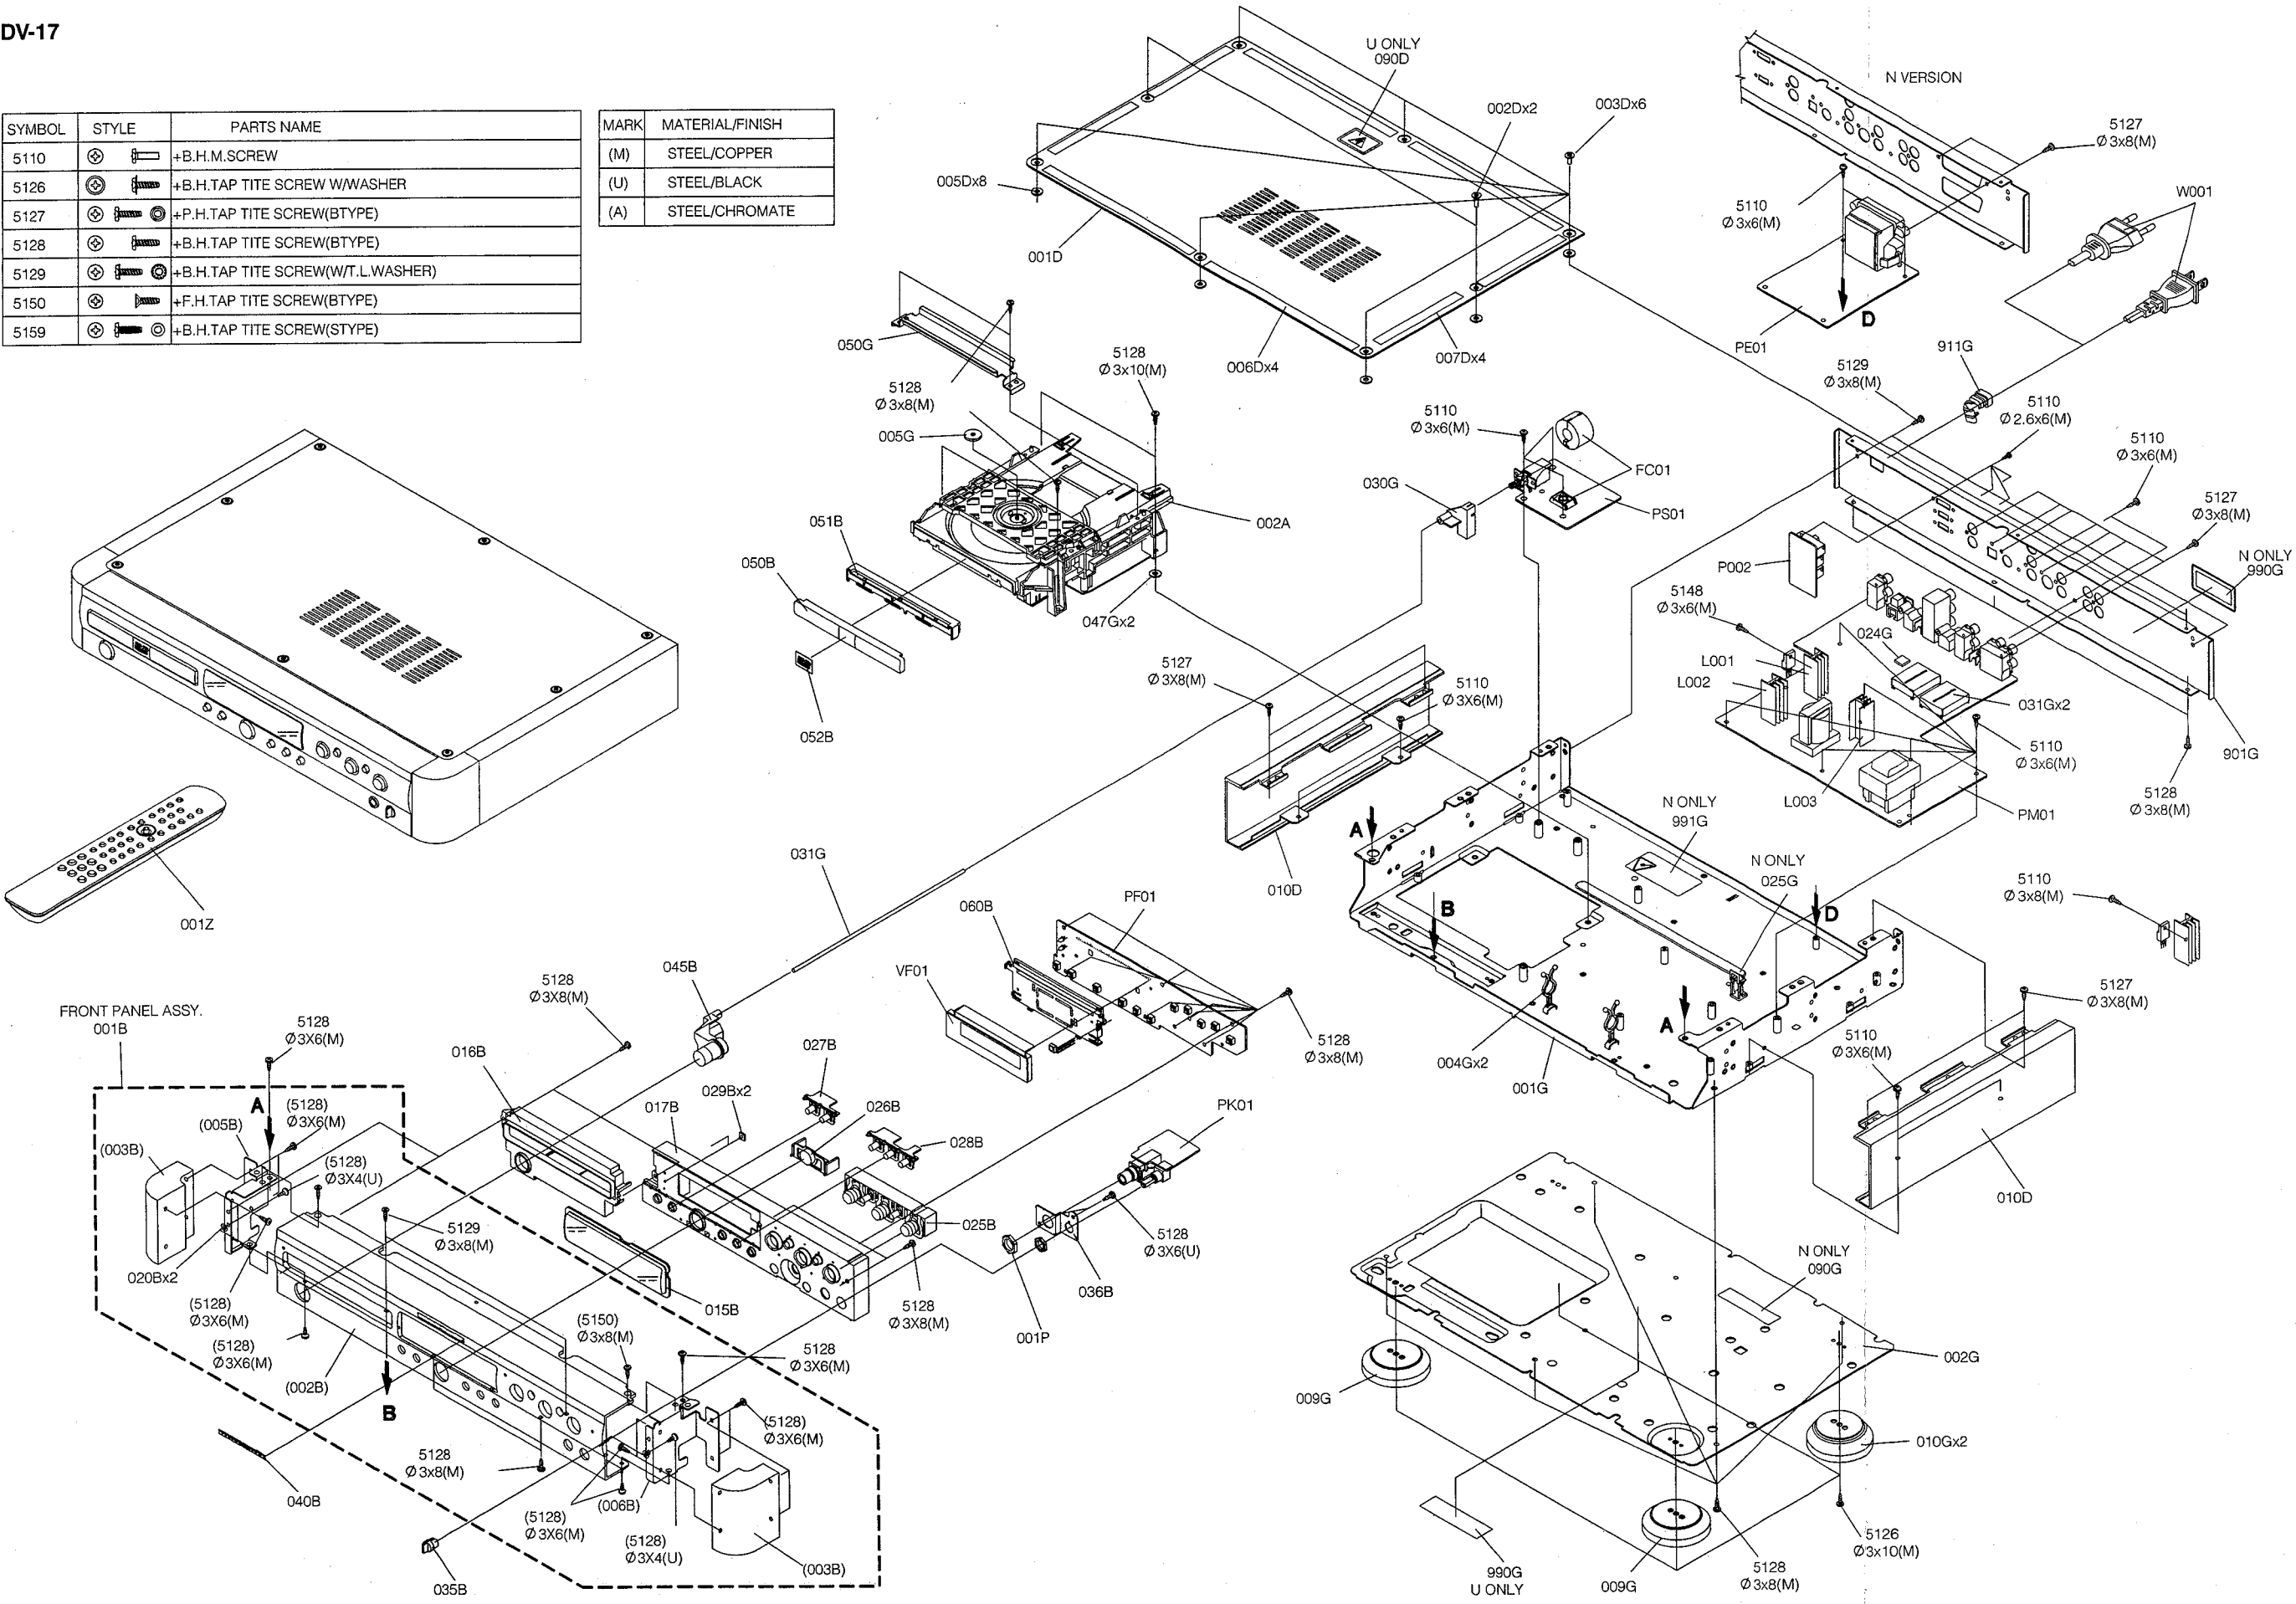

DV7010

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
001B	BLACK	9965 000 07791	FRONT CHASSIS BLACK	403K105020
001B	GOLD	9965 000 07803	FRONT CHASSIS GOLD	403K105120
002B	BLACK	9965 000 05016	FRONT CHASSIS BLACK	383K105020
002B	GOLD	9965 000 05017	FRONT CHASSIS GOLD	383K105120
003B	BLACK	9965 000 07792	FRONT PANEL BLACK	403K248010
003B	GOLD	9965 000 07804	FRONT PANEL GOLD	403K248110
005B	BLACK	9965 000 05020	BUTTON FUNCTION BLACK	383K270010
005B	GOLD	9965 000 05021	BUTTON FUNCTION GOLD	383K270110
006B	BLACK	9965 000 05022	BUTTON OPEN/CLOSE BLACK	383K270020
006B	GOLD	9965 000 05023	BUTTON OPEN/CLOSE GOLD	383K270120
007B		9965 000 07793	WINDOW	383K158030
008B		9965 000 05025	BUTTON SUB FUNCTION	386K270090
009B		9965 000 07461	BADGE MARANTZ BLACK	185J251010
010B		9965 000 01393	LENS STANDBY	312J355010
020B	BLACK	4822 411 20336	KNOB PHONE BLACK	284T154310
020B	GOLD	9965 000 00580	KNOB PHONE GOLD	284T154240
045B	BLACK	9965 000 07794	BUTTON POWER BLACK	403K270010
045B	GOLD	9965 000 07805	BUTTON POWER GOLD	403K270110
050B	BLACK	9965 000 07795	ESCUTCHEON TRAY FRONT BLACK	403K063010
050B	GOLD	9965 000 07806	ESCUTCHEON TRAY FRONT GOLD	403K063110
051B	BLACK	9965 000 05028	BADGE DVD BLACK	386K251030
051B	GOLD	9965 000 05029	BADGE DVD GOLD	386K251130
009G		9965 000 05030	LEG FRONT	383K057010
010G		9965 000 05031	LEG REAR	383K057110
025G		9965 000 07796	LINK POWER BUTTON	403K121010
026G		9965 000 07623	SHAFT POWER BUTTON	403K112010
911G	/A,/C,/L,/N /S,/U	4822 532 60948	BUSHING MAINS CORD	450H259010
911G	/F		BUSHING MAINS CORD	318K259020
▲ W001	/A		MAINS CORD 7.5A 250V SAA	YC01800630
▲ W001	/C		MAINS CORD 3A 250V	YC02000820
▲ W001	/F		MAINS CORD 15A 125V OFC	YC01800430
▲ W001	/L		MAINS CORD 10A 250V CCEE	YC01800880
▲ W001	/N,/S	4822 321 11343	MAINS CORD 2.5A 250V	YC01800790
▲ W001	/U		MAINS CORD	YC02000880
001T	/A,/U		PACKING USER GUIDE (A.U)	403K851250
001T	/C,/L,/S		USER GUIDE (C S L)	403K851350
001T	/F		USER GUIDE (JPN)	403K851110
001T	/N	9965 000 07797	USER GUIDE (EURO)	403K851310
001Z		9965 000 07802	REMOTE CONTROLLER RC7010DV	ZK403K0010
001S			NOT STANDARD SPARE PARTS PACKING CASE	403K801010
002S			CUSHION	386K809010

DV-18mkII/DV-17

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
001B	17 GOLD		FRONT PANEL ASSY GOLD	405K248510	009G	17	9965 000 07621	LEG FRONT GOLD	405K057010
001B	17 BLACK		FRONT PANEL ASSY BLACK	405K248500	010G	17	4822 462 42134	LEG REAR GOLD	291K057010
002B	17 GOLD	9965 000 07650	FRONT PANEL GOLD	405K248110	009G	18A		LEG D60/H15 GOLD	402K057010
002B	17 BLACK	9965 000 07613	FRONT PANEL BLACK	405K248010	010G	18A		PEF/PORON.F	
003B	17 GOLD	4822 444 40853	ESCUTCHEON CORNER COLUMN GOLD	318K063110				LEG D60/H18 GOLD	370K057120
003B	17 BLACK	4822 444 40852	ESCUTCHEON CORNER COLUMN BLACK	318K063010	025G	17 /N		PEF/PORON.R	
001B	18A GOLD		FRONT PANEL ASSY GOLD	402K248510	030G		9965 000 07622	SUPPORT EURO CONNECTOR	349K101010
001B	18A BLACK		FRONT PANEL ASSY BLACK	402K248500				LINK POWER BUTTON (BL OR BR)	402K121010
002B	18A GOLD		FRONT PANEL GOLD	402K248110	031G		9965 000 07623	SHAFT POWER BUTTON	403K112010
002B	18A BLACK		FRONT PANEL BLACK	402K248010	911G	17 /F		BUSHING MAINS CORD	1455259210
003B	18A GOLD		ESCUTCHEON CORNER COLUMN PL LEFT GOLD	342K063110	911G	17 /S,/N	4822 532 60948	BUSHING MAINS CORD	450H259010
003B	18A BLACK		ESCUTCHEON CORNER COLUMN PL LEFT BLACK	342K063010	911G	18A		BUSHING MAINS CORD	450H259010
004B	18A GOLD		ESCUTCHEON CORNER COLUMN PL RIGHT GOLD	342K063120	▲ W001	17 /F		MAINS CORD 15A 125V OFC	YC01800430
004B	18A BLACK		ESCUTCHEON CORNER COLUMN PL RIGHT BLACK	342K063020	▲ W001	17 /S		MAINS CORD 5A 250V	YC01800760
015B	GOLD	9965 000 07651	WINDOW PINK SMOKE GOLD	318K158150	▲ W001	17 /N	4822 321 11343	MAINS CORD 2.5A 250V	YC01800790
015B	BLACK	9965 000 07614	WINDOW BLUE SMOKE BLACK	318K158050	▲ W001	18A /A		MAINS CORD 7.5A 250V FIX(SAA)	YC01800630
016B	GOLD	9965 000 07652	BUSHING FOR TRAY OPENING GOLD	402K259110	▲ W001	18A /C		MAINS CORD KOREA 3A 250V	YC02000820
016B	BLACK	9965 000 07615	BUSHING FOR TRAY OPENING BLACK	402K259010	▲ W001	18A /K,/L		MAINS CORD CCEE APP.(AC250V 10A)+VAR2P	YC01800880
017B	GOLD	9965 000 07656	RETAINER FRONT PCB HOLDER GOLD	370K104110	▲ W001	18A /S		MAINS CORD FOR BS(MAYOR)	YC01800760
017B	BLACK	9965 000 07616	RETAINER FRONT PCB HOLDER BLACK	370K104010	▲ W001	18A /U		MAINS CORD UL/CSA NON-INTEGRAL	YC02000880
025B	GOLD	9965 000 00563	BUTTON PLAY/STOP/PAUSE GOLD	362K270150	001T	17 /F		PACKING USER GUIDE (JPN)	405K851110
025B	BLACK	9965 000 00562	BUTTON PLAY/STOP/PAUSE BLACK	362K270050	001T	17 /S		USER GUIDE DV-17K	405K851350
026B	GOLD	4822 410 70033	BUTTON OPEN/CLOSE GOLD	318K270130	001T	17 /N	9965 000 07624	USER GUIDE (EURO)	405K851310
026B	BLACK	4822 410 70028	BUTTON OPEN/CLOSE BLACK	318K270030	001T	18A /A,/U		USER GUIDE DV-18MK2 U	402K851250
027B	GOLD	9965 000 00567	BUTTON EPEAT GOLD	376K270120	001T	18A	/C,/K,/S,/L	USER GUIDE 18MK2 K	402K851350
027B	BLACK	9965 000 00566	BUTTON REPEAT BLACK	376K270020	001Z	17 /N,/S	9965 000 07625	REMOTE CONTROLLER RC-17DV	ZK405K0010
028B	GOLD	9965 000 00565	BUTTON SCAN GOLD	376K270110	001Z	17 /F		REMOTE CONTROLLER RC-17DV	ZK405K0020
028B	BLACK	9965 000 00564	BUTTON SCAN BLACK	376K270010	001Z	18A		REMOTE CONTROLLER RC7010DV	ZK403K0010
029B		9965 000 00584	LENS STANDBY/FL OFF	351H355010					
035B	GOLD	9965 000 00580	KNOB PHONE GOLD	284T154240					
035B	BLACK	4822 411 20336	KNOB PHONE BLACK	284T154310					
040B	GOLD	9965 000 01554	BADGE MARANTZ GOLD	313J251110					
040B	BLACK	9965 000 01553	BADGE MARANTZ BLACK	313J251010					
045B	GOLD	9965 000 07657	BUTTON POWER GOLD	402K270110					
045B	BLACK	9965 000 07617	BUTTON POWER BLACK	402K270010					
050B	GOLD	9965 000 07658	ESCUTCHEON TRAY LID GOLD	370K063110					
050B	BLACK	9965 000 07618	ESCUTCHEON TRAY LID BLACK	370K063010					
051B	GOLD	9965 000 07659	RETAINER TRAY LID GOLD	402K104110					
051B	BLACK	9965 000 07619	RETAINER TRAY LID BLACK	402K104010					
052B		9965 000 07620	BADGE DVD	370K251110					
002D	17 GOLD	4822 502 14425	SCREW THINHEAD 3X8NI	323S010020					
002D	17 BLACK	4822 502 21693	SCREW THINHEAD 3X8BL	323S010030	001S	17		NOT STANDARD SPARE PARTS PACKING CASE	405K801010
003D	17 GOLD	4822 502 14462	SCREW THINHEAD 3X5NI	318K010020	001S	18A		PACKING CASE DV-18MK2	402K801010
003D	17 BLACK	4822 502 14461	SCREW THINHEAD 3X5BL	318K010030	002S			CUSHION	318K809010
010D	17 GOLD	4822 444 40855	SIDE PANEL GOLD	318K249110					
010D	17 BLACK	4822 444 40854	SIDE PANEL BLACK	318K249010					

1.14 ELECTRICAL PARTS LIST

ASSIGNMENT OF COMMON PARTS CODES.

RESISTORS

R*** : 1) GD05 x x x 140, Carbon film fixed resistor, ±5% 1/4W
 R*** : 2) GD05 x x x 160, Carbon film fixed resistor, ±5% 1/6W
 ↓
 ① Resistance value

Examples

① Resistance value

0.1Ω 001	10Ω 100	1kΩ 102	100kΩ 104
0.5Ω 005	18Ω 180	2.7kΩ 272	680kΩ 684
1Ω 010	100Ω 101	10kΩ 103	1MΩ 105
6.8Ω 068	390Ω 391	22kΩ 223	4.7MΩ 475

Note : Please distinguish 1/4W from 1/6W by the shape of parts used actually.

CAPACITORS

C*** : CERAMIC CAP.

3) DD1 x x x 370, Ceramic capacitor
 ↓
 Disc type
 Temp.coef. P350~N1000, 50V
 ↓
 ③ Capacity value
 ↓
 ② Tolerance

Examples

② Tolerance (Capacity deviation)

±0.25 pF 0
±0.5 pF 1
±5 % 5

Tolerance of COMMON PARTS handled here are as follows :

0.5 pF - 5 pF ±0.25 pF
6 pF - 10 pF ±0.5 pF
12 pF - 560 pF ±5 %

③ Capacity value

0.5 pF 005	3 pF 030	100 pF 101
1 pF 010	10 pF 100	220 pF 221
1.5 pF 015	47 pF 470	560 pF 561

C*** : CERAMIC CAP.

4) DK16 x x x 300, High dielectric constant ceramic capacitor
 ↓
 Disc type
 Temp.chara. 2B4, 50V
 ↓
 ④ Capacity value

Examples

④ Capacity value

100 pF 101	1000 pF 102	10000 pF 103
470 pF 471	2200 pF 222	

C*** : 5) ELECTROLYTIC CAP. (), 6) FILM CAP. ()

5) EA x x x x x 10, Electrolytic capacitor
 ↓
 One-way lead type, Tolerance ±20%
 ↓
 ⑥ Working voltage
 ↓
 ⑤ Capacity value

Examples

⑤ Capacity value

0.1 μF 104	4.7 μF 475	100 μF 107
0.33 μF 334	10 μF 106	330 μF 337
1 μF 105	22 μF 226	1100 μF 118
2200 μF 228		

⑥ Working voltage

6.3 V 006	25 V 025
10 V 010	35 V 035
16 V 016	50 V 050

6) DF15 x x x 350 → Plastic film capacitor
 DF15 x x x 310 → One-way type, Mylar ±5% 50V
 DF16 x x x 310 → Plastic film capacitor
 ↓
 One-way type, Mylar ±10% 50V
 ↓
 ⑦ Capacity value

Examples

⑦ Capacity value

0.001 μF (1000 pF) 102	0.1 μF 104
0.0018 μF 182	0.56 μF 564
0.01 μF 103	1 μF 105
0.015 μF 153	

NOTE 1) The above CODES(R***, R***, C***, C*** and C***) are omitted on the schematic diagram in some case.
 2) On the occasion, be confirmed the common parts on the parts list.
 3) Refer to "Common Parts List" for the other common parts(RI05, DD4, DK4).

NOTE ON SAFETY FOR FUSIBLE RESIST OR :

The suppliers and their type numbers of fusible resistors are as follows ;

1. KOA Corporation

Part No.(MJI)	Type No.(KOA)	Description
NH05 x x x 140	RF25S x x x x Ω	J ±5% (1/4W)
NH05 x x x 120	RF50S x x x x Ω	J ±5% (1/2W)
NH85 x x x 110	RF73B2A x x x x Ω	J ±5% (1/10W)
NH95 x x x 140	RF73B2E x x x x Ω	J ±5% (1/4W)

* Resistance value

Resistance value(0.1Ω - 10k Ω)

2. Matsushita Electronic Components Co., Ltd

Part No.(MJI)	Type No.(MEC)	Description
NF05 x x x 140	ERD-2FCJ x x x	(±5% 1/4W)
RF05 x x x 140		
NF02 x x x 140	ERD-2FCG x x x	(±2% 1/4W)
RF02 x x x 140		

* Resistance value

Examples



* Resistance value

0.1Ω 001	10Ω 100	1kΩ 102	100kΩ 104
0.5Ω 005	18Ω 180	2.7kΩ 272	680kΩ 684
1Ω 010	100Ω 101	10kΩ 103	1MΩ 105
6.8Ω 068	390Ω 391	22kΩ 223	4.7MΩ 475


ABBREVIATION AND MARKS

ANT. : ANTENNA	BATT. : BATTERY
CAP. : CAPACITOR	CER. : CERAMIC
CONN. : CONNECTING	DIG. : DIGITAL
HP : HEADPHONE	MIC. : MICROPHONE
μ-PRO : MICROPROCESSOR	REC. : RECORDING
RES. : RESISTOR	SPK : SPEAKER
SW : SWITCH	TRANSF. : TRANSFORMER
TRIM. : TRIMMING	TRS. : TRANSISTOR
VAR. : VARIABLE	X' TAL : CRYSTAL

NOTE ON SAFETY:

Symbol  Fire or electrical shock hazard. Only original parts should be used to replaced any part marked with symbol  Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

安全上の注意 :

 がついている部品は、安全上重要な部品です。必ず指定されている部品番号の部品を使用して下さい。

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
			PE01-SCART CIRCUIT BOARD PE01-CAPACITORS						
C801 }	17 / N 7010 / N	4822 124 90354	ELECT 100μF M 16V	OA10701620	C870	17 / N 7010 / N	4822 126 13883	CER. 220pF ±5% 50V	DD95221300
C804					C871	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
C805	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	C873	17 / N 7010 / N	4822 126 11687	CER. 0.1μF +80 -20% 25V	DK98104200
C806	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	C876	17 / N 7010 / N	4822 126 13883	CER. 220pF ±5% 50V	DD95221300
C807	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	C877	17 / N 7010 / N	5322 124 21731	ELECT 10μF M 50V	OA10605020
C808	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	C879	17 / N 7010 / N	5322 124 21731	ELECT 10μF M 50V	OA10605020
C809	17 / N 7010 / N	4822 122 33741	CER. 10pF ±0.5pF 50V	DD91100300	C881	17 / N 7010 / N	4822 126 13883	CER. 220pF ±5% 50V	DD95221300
C810	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	C882	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
C811	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	C884	17 / N 7010 / N	4822 126 11687	CER. 0.1μF +80 -20% 25V	DK98104200
C812	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	C886	17 / N 7010 / N	5322 124 21731	ELECT 10μF M 50V	OA10605020
C813	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	C887	17 / N 7010 / N	4822 126 13303	CER. 1μF +80 -20% 10V	DK98105200
C814	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	C888	17 / N 7010 / N	4822 126 13303	CER. 1μF +80 -20% 10V	DK98105200
C815	17 / N 7010 / N	4822 122 33741	CER. 10pF ±0.5pF 50V	DD91100300					
C816	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	C951	17 / N 7010 / N	4822 124 90354	ELECT 100μF M 16V	OA10701620
C817	17 / N 7010 / N	5322 124 21731	ELECT 10μF M 50V	OA10605020	C952	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C819	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	C953	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C820	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	C954	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
					C956	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C821	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	C957	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C822	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	C960	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C823	17 / N 7010 / N	4822 122 33741	CER. 10pF ±0.5pF 50V	DD91100300	C961	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C824	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	C962	17 / N 7010 / N	4822 126 13883	CER. 220pF ±5% 50V	DD95221300
C825	17 / N 7010 / N	4822 126 11704	CER. 0.022μF +80 -20% 50V	DK98223300	C963	17 / N 7010 / N	4822 126 13883	CER. 220pF ±5% 50V	DD95221300
C826	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	C964	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C827	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	C965	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C828	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	C968	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C829	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	C969	17 / N 7010 / N	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
C830	17 / N 7010 / N	4822 122 33741	CER. 10pF ±0.5pF 50V	DD91100300	C970	17 / N 7010 / N	4822 126 13883	CER. 220pF ±5% 50V	DD95221300
C831	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	C971	17 / N 7010 / N	4822 126 13883	CER. 220pF ±5% 50V	DD95221300
C832	17 / N 7010 / N	5322 124 21731	ELECT 10μF M 50V	OA10605020	C972	17 / N 7010 / N	4822 124 41539	ELECT 47μF M 16V	OA47601620
C833	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	C974 }	17 / N 7010 / N	5322 126 11578	CER. 1000pF ±10% B 50V	DK96102300
C834	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	C977				
C835	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300				PE01-RESISTORS	
C836	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	R801	17 / N 7010 / N	4822 051 30101	100 Ω ±5% 1/16W	NN05101610
C837	17 / N 7010 / N	4822 122 33741	CER. 10pF ±0.5pF 50V	DD91100300	R802	17 / N 7010 / N	4822 051 30681	680 Ω ±5% 1/16W	NN05681610
C838	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	R803	17 / N 7010 / N	4822 051 30471	470 Ω ±5% 1/16W	NN05471610
C839	17 / N 7010 / N	5322 124 21731	ELECT 10μF M 50V	OA10605020	R804	17 / N 7010 / N	4822 051 30223	22k Ω ±5% 1/16W	NN05223610
C840	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R805	17 / N 7010 / N	4822 051 30101	100 Ω ±5% 1/16W	NN05101610
					R806	17 / N 7010 / N	4822 051 30681	680 Ω ±5% 1/16W	NN05681610
C841	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	R807	17 / N 7010 / N	4822 051 30471	470 Ω ±5% 1/16W	NN05471610
C842	17 / N 7010 / N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300	R808	17 / N 7010 / N	4822 051 30223	22k Ω ±5% 1/16W	NN05223610
C843	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	R809	17 / N 7010 / N	4822 051 30101	100 Ω ±5% 1/16W	NN05101610
C844	17 / N 7010 / N	4822 122 33741	CER. 10pF ±0.5pF 50V	DD91100300	R810	17 / N 7010 / N	4822 051 30681	680 Ω ±5% 1/16W	NN05681610
C845	17 / N 7010 / N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300	R811	17 / N 7010 / N	4822 051 30471	470 Ω ±5% 1/16W	NN05471610
C846	17 / N 7010 / N	5322 124 21731	ELECT 10μF M 50V	OA10605020	R812	17 / N 7010 / N	4822 051 30223	22k Ω ±5% 1/16W	NN05223610
C847	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R813	17 / N 7010 / N	4822 051 30101	100 Ω ±5% 1/16W	NN05101610
C848	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R814	17 / N 7010 / N	4822 051 30681	680 Ω ±5% 1/16W	NN05681610
C849	17 / N 7010 / N	4822 122 33777	CER. 47pF ±5% CG 50V	DD95470300	R815	17 / N 7010 / N	4822 051 30471	470 Ω ±5% 1/16W	NN05471610
C850	17 / N 7010 / N	4822 122 33777	CER. 47pF ±5% CG 50V	DD95470300	R816	17 / N 7010 / N	4822 051 30332	3.3k Ω ±5% 1/16W	NN05332610
C851	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R817	17 / N 7010 / N	4822 051 30101	100 Ω ±5% 1/16W	NN05101610
C852	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R818	17 / N 7010 / N	4822 051 30681	680 Ω ±5% 1/16W	NN05681610
C853	17 / N 7010 / N	4822 124 90354	ELECT 100μF M 16V	OA10701620	R819	17 / N 7010 / N	4822 051 30471	470 Ω ±5% 1/16W	NN05471610
C854	17 / N 7010 / N	4822 126 11704	CER. 0.022μF +80 -20% 50V	DK98223300	R820	17 / N 7010 / N	4822 051 30332	3.3k Ω ±5% 1/16W	NN05332610
C855	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300					
C856	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R821	17 / N 7010 / N	4822 051 30101	100 Ω ±5% 1/16W	NN05101610
C857	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R822	17 / N 7010 / N	4822 051 30681	680 Ω ±5% 1/16W	NN05681610
C858	17 / N 7010 / N	4822 126 13303	CER. 1μF +80 -20% 10V	DK98105200	R823	17 / N 7010 / N	4822 051 30471	470 Ω ±5% 1/16W	NN05471610
C859	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R824	17 / N 7010 / N	4822 051 30332	3.3k Ω ±5% 1/16W	NN05332610
C860	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R825	17 / N 7010 / N	4822 051 30101	100 Ω ±5% 1/16W	NN05101610
C861	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R826	17 / N 7010 / N	4822 051 30101	100 Ω ±5% 1/16W	NN05101610
C862	17 / N 7010 / N	4822 126 13303	CER. 1μF +80 -20% 10V	DK98105200	R827	17 / N 7010 / N	4822 051 30472	4.7k Ω ±5% 1/16W	NN05472610
C864	17 / N 7010 / N	4822 126 13883	CER. 220pF ±5% 50V	DD95221300	R828	17 / N 7010 / N	4822 051 30472	4.7k Ω ±5% 1/16W	NN05472610
C865	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R829	17 / N 7010 / N	4822 051 30222	2.2k Ω ±5% 1/16W	NN05222610
C867	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R830	17 / N 7010 / N	4822 051 30472	4.7k Ω ±5% 1/16W	NN05472610
C869	17 / N 7010 / N	4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300	R831	17 / N 7010 / N	4822 051 30472	4.7k Ω ±5% 1/16W	NN05472610
					R832	17 / N 7010 / N	4822 117 13632	100k Ω ±5% 1/16W	NN05104610
					R833	17 / N 7010 / N	4822 051 30561	560 Ω ±5% 1/16W	NN05561610

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
Q815	17 /N 7010 /N	4822 130 10698	CHIP TRS. 2SA1586(Y GR) 2SA1576(Q R)	HX100012A0	PF01-FRONT CIRCUIT BOARD PF01-CAPACITORS				
Q816 }	17 /N 7010 /N	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0	CF01 }		4822 122 31765	CER. 100pF ±5% 50V	DD95101300
Q823 }	17 /N 7010 /N	4822 130 63601	CHIP TRS. 2SC4213	HX342132A0	CF11 CF12		4822 124 23056	ELECT 47μF 10V	EJ47601010
Q952 }	17 /N 7010 /N	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0	CF13 CF14		4822 126 11687	CER. 0.1μF +80 -20% 25V	DK98104200
Q959 }	17 /N 7010 /N	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0	CF15 CF16		4822 126 11687	CER. 0.1μF +80 -20% 25V	DK98104200
Q961	17 /N 7010 /N	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0	CF19 CF20		9965 000 01912	CER. 0.047μF +80 -20% 50V	DK98473300
Q962	17 /N 7010 /N	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210	CF21 CF22		4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
PE01-MISCELLANEOUS					CF28 CF29		4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
F801	17 /N 7010 /N	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020	CF33 CF34		4822 122 31765	CER. 100pF ±5% 50V	DD95101300
F802	17 /N 7010 /N	4822 051 30121	CHIP RES. 120Ω ±5% 1/16W	NN05121610	CF35 CF36	17 /N 7010 /N	4822 122 31765	CER. 100pF ±5% 50V	DD95101300
F803 }	17 /N 7010 /N	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020	CF37 CF38		4822 122 33752	CER. 15pF ±5% 50V	DD95150300
F808 }	17 /N 7010 /N	4822 051 30121	CHIP RES. 120Ω ±5% 1/16W	NN05121610	CF39 CF40		4822 122 33752	CER. 15pF ±5% 50V	DD95150300
F809 }	17 /N 7010 /N	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020	RF01	17 /F 18A /L /U	9965 000 03842	CER. 0.047μF +80 -20% 50V	DK98473300
F810 }	17 /N 7010 /N	4822 051 30121	CHIP RES. 120Ω ±5% 1/16W	NN05471610	RF01	17 /S /N 18A	9965 000 03842	CER. 0.1μF +80 -20% 25V	DK98104200
F814 }	17 /N 7010 /N	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020	RF01	/A /C /K /S 7010	9965 000 03842	ELECT 47μF 10V	EJ47601010
F952	17 /N 7010 /N	4822 051 30471	CHIP RES. 470Ω ±5% 1/16W	NN05471610	RF01	/A /C /N /S 7010 /F /L /U	9965 000 03842	CER. 0.1μF +80 -20% 25V	DK98104200
F953	17 /N 7010 /N	4822 051 30471	CHIP RES. 470Ω ±5% 1/16W	NN05471610	RF02	17 /F 18A /L /U	9965 000 03842	CER. 100pF ±5% 50V	DD95101300
F954	17 /N 7010 /N	4822 051 30121	CHIP RES. 120Ω ±5% 1/16W	NN05121610	RF02	17 /S /N 18A	9965 000 03842	CER. 15pF ±5% 50V	DD95150300
F955	17 /N 7010 /N	4822 051 30121	CHIP RES. 120Ω ±5% 1/16W	NN05121610	RF02	/A /C /K /S 7010	9965 000 03842	CER. 0.047μF +80 -20% 50V	DK98473300
F956	17 /N 7010 /N	4822 051 30471	CHIP RES. 470Ω ±5% 1/16W	NN05471610	RF02	/A /C /N /S 7010 /F /L /U	9965 000 03842	CER. 0.1μF +80 -20% 25V	DK98104200
F957	17 /N 7010 /N	4822 051 30471	CHIP RES. 470Ω ±5% 1/16W	NN05471610	RF02	17 /F 18A /L /U	9965 000 03842	ELECT 47μF 10V	EJ47601010
F958	17 /N 7010 /N	4822 051 30121	CHIP RES. 120Ω ±5% 1/16W	NN05121610	RF02	17 /S /N 18A	9965 000 03842	CER. 0.1μF +80 -20% 25V	DK98104200
F959	17 /N 7010 /N	4822 051 30121	CHIP RES. 120Ω ±5% 1/16W	NN05121610	RF02	/A /C /K /S 7010	9965 000 03842	CER. 100pF ±5% 50V	DD95101300
J802	17 /N 7010 /N	9965 000 05000	TERMINAL EUROCONNECTOR	YT02420010	RF02	/A /C /N /S 7010 /F /L /U	9965 000 03842	CER. 15pF ±5% 50V	DD95150300
L801 }	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J%	LC11533900	RF03		4822 117 12925	CER. 0.047μF +80 -20% 50V	DK98473300
L804 }	17 /N 7010 /N	9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	RF04		4822 051 30102	CER. 0.1μF +80 -20% 25V	DK98104200
L805	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J%	LC11533900	RF05		4822 051 30101	CER. 100pF ±5% 50V	DD95101300
L806	17 /N 7010 /N	9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	RF10 RF11	17 /N 7010 /N	4822 051 30101	100 Ω ±5% 1/16W	NN05101610
L807	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J%	LC11533900	RF14		4822 117 12925	47k Ω ±5% 1/16W	NN05473610
L808	17 /N 7010 /N	9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	RF15		4822 116 83829	270 Ω ±5% 1/16W	NN05271610
L809	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J%	LC11533900	RF16		4822 051 30103	10k Ω ±5% 1/16W	NN05103610
L810	17 /N 7010 /N	9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	RF17	17 18A	4822 116 83829	270 Ω ±5% 1/16W	NN05271610
L811	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J%	LC11533900	RF18 RF19		4822 051 30103	10k Ω ±5% 1/16W	NN05103610
L812	17 /N 7010 /N	9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	RF22		4822 117 12925	47k Ω ±5% 1/16W	NN05473610
L813	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J%	LC11533900	RF23		4822 117 12925	47k Ω ±5% 1/16W	NN05473610
L814	17 /N 7010 /N	9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	RF24		4822 116 82487	0 Ω ±5% 1/16W	NN05000610
L815	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J%	LC11533900	RF26		4822 051 30101	100 Ω ±5% 1/16W	NN05101610
L816	17 /N 7010 /N	9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	RF27		4822 117 13632	100k Ω ±5% 1/16W	NN05104610
L951	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J%	LC11533900	RF28		4822 117 13632	100k Ω ±5% 1/16W	NN05104610
					RF29		4822 117 12925	47k Ω ±5% 1/16W	NN05473610
					RF30		4822 051 30103	10k Ω ±5% 1/16W	NN05103610
					RF31				

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
RF32		4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	QF01	7010	9965 000 07800	MICROPROCESSOR	HU403KT00F
RF33		4822 051 30222	2.2k Ω $\pm 5\%$ 1/16W	NN05222610				MP87CM74AF	
RF34		4822 051 30101	100 Ω $\pm 5\%$ 1/16W	NN05101610	QF02		4822 130 10698	CHIP TRS. 2SA1586(Y GR)	HX100012A0
RF35		4822 051 30101	100 Ω $\pm 5\%$ 1/16W	NN05101610				2SA1576(Q R)	
RF36		4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	QF03		4822 130 60669	CHIP TRS. 2SC4081(Q R)	HX300012A0
RF37		4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610				2SC4116(Y GR)	
RF38		4822 116 83829	270 Ω $\pm 5\%$ 1/16W	NN05271610	QF04		4822 209 15921	IC RESET IC S-806D-Z	HC10077530
RF39		4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	QF05		4822 130 60669	CHIP TRS. 2SC4081(Q R)	HX300012A0
RF40	17 18A	4822 116 83829	270 Ω $\pm 5\%$ 1/16W	NN05271610				2SC4116(Y GR)	
RF40	7010	4822 051 30152	1.5k Ω $\pm 5\%$ 1/16W	NN05152610	QF06		4822 130 60669	CHIP TRS. 2SC4081(Q R)	HX300012A0
RF41								2SC4116(Y GR)	
RF44		4822 051 30101	100 Ω $\pm 5\%$ 1/16W	NN05101610	QF07		4822 130 10698	CHIP TRS. 2SA1586(Y GR)	HX100012A0
RF45		4822 051 30472	4.7k Ω $\pm 5\%$ 1/16W	NN05472610				2SA1576(Q R)	
RF46		4822 051 30472	4.7k Ω $\pm 5\%$ 1/16W	NN05472610	QF08		4822 130 10698	CHIP TRS. 2SA1586(Y GR)	HX100012A0
RF47		4822 051 30472	4.7k Ω $\pm 5\%$ 1/16W	NN05472610				2SA1576(Q R)	
RF48		4822 117 12864	82k Ω $\pm 5\%$ 1/16W	NN05823610	QF09		4822 130 61903	SEMICON.COMP	BA10026210
RF49		4822 051 30472	4.7k Ω $\pm 5\%$ 1/16W	NN05472610				DTA114EUA	
RF50	18A/K,U	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	QF10		9965 000 04975	IC NJM79L24A -24V	HC39124090
RF50	7010/U	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	QF11		4822 130 10698	CHIP TRS. 2SA1586(Y GR)	HX100012A0
RF51	17 /F/S,N	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610				2SA1576(Q R)	
RF51	18A	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	QF12	17 /N 7010 /N	4822 130 61903	SEMICON.COMP	BA10026210
	/A,/C,/S,/L							DTA114EUA	
RF51	7010 /A,/C,/F	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	QF13	17 /N 7010 /N	4822 130 61906	SEMICON.COMP	BA20035210
	/L,/N,/S							DTC114EU	
RF52	17 /S	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	QF14	17 /N 7010 /N	4822 130 61906	SEMICON.COMP	BA20035210
	7010 /A,/S							DTC114EU	
RF52	18A	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	QF15	17 /N 7010 /N	4822 130 61906	SEMICON.COMP	BA20035210
	/A,/C,/K,/S,/L							DTC114EU	
RF53	17 /F,/N	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610				PF01-MISCELLANEOUS	
	18A/U				JF01	18A		JACK, 1MM PITCH FFC	YJ07013060
RF53	7010	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610		7010 /S,/U		HLW16R-2C7	
	/A,/C,/L,/U				SF01				
RF54	17 /S,/N	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610			4822 276 13732	PUSH SWITCH SKQNAE	SP01013310
RF54	18A	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	SF09			H/SMM 160GF	
	/C,/K,/S,/L				SF11		4822 276 13732	PUSH SWITCH SKQNAE	SP01013310
RF54	7010	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610				H/SMM 160GF	
	/C,/L,/N,/S				SF12		4822 276 13732	PUSH SWITCH SKQNAE	SP01013310
RF55	17 /F	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610				H/SMM 160GF	
	18A /A,/U				VF01		9965 000 07631	DISPLAY UNIT FL	HQ31111410
RF55	7010 /A,/F,/U	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610				11-BT-183	
RF56					XF01		9965 000 04977	SERAMIC VIB. CSTS	FQ08004060
		4822 117 12864	82k Ω $\pm 5\%$ 1/16W	NN05823610				MG 8MHz	
RF59					ZF01		4822 130 11494	PHOTO UNIT IR-SENSOR	HW10004210
RF60	17 /N 7010 /N	4822 051 30101	100 Ω $\pm 5\%$ 1/16W	NN05101610				RPM6936-V4	
RF61	17 /N 7010 /N	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610				PK01-HEADPHONE	
RF62	17 /N 7010 /N	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610				CIRCUIT BOARD	
RF63	17 /N 7010 /N	4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610				PK01-CAPACITORS	
RF64		4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610	CK01		4822 122 33777	CER. 47pF $\pm 5\%$ 50V	DD95470300
RF65	17 /S,/N	9965 000 03842	18 Ω $\pm 5\%$ 1/16W	NN05180610	CK02		4822 122 33777	CER. 47pF $\pm 5\%$ 50V	DD95470300
RF65	18A	9965 000 03842	18 Ω $\pm 5\%$ 1/16W	NN05180610	CK03	17 18A	4822 124 23052	ELECT 100 μ F 16V	EJ10701610
	/A,/C,/K,/S				CK03	7010	4822 124 41539	ELECT 47 μ F M 16V	OA47601620
RF65	7010	9965 000 03842	18 Ω $\pm 5\%$ 1/16W	NN05180610	CK04	17 18A	4822 124 23052	ELECT 100 μ F 16V	EJ10701610
	/A,/C,/N,/S				CK04	7010	4822 124 41539	ELECT 47 μ F M 16V	OA47601620
					CK07		4822 122 31765	CER. 100pF $\pm 5\%$ 50V	DD95101300
DF01		9965 000 03119	CHIP DIODE ZENER	HZ30012020	CK08		4822 122 31765	CER. 100pF $\pm 5\%$ 50V	DD95101300
			MA8033-H 3.3V		CK09		4822 126 12339	CER. 2200pF $\pm 10\%$ B 50V	DK96222300
DF02		9965 000 07629	CHIP DIODE MA8039-H	HZ30025020	CK10		4822 126 11687	CER. 0.1 μ F +80 -20% 25V F	DK98104200
DF03		4822 130 83715	CHIP DIODE	HZ21005000				PK01-RESISTORS CHIP	
			1SS301 DAN202U		RK01		9965 000 00602	VARIABLE	RM01031170
DF04	17 18A	4822 130 11569	L.E.D. HLMF-K200	HI10005340				RK09L12B0 10k Ω B	
			RED 3MM		RK03		4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610
DF05		4822 130 11569	L.E.D. HLMF-K200	HI10005340	RK04		4822 051 30103	10k Ω $\pm 5\%$ 1/16W	NN05103610
			RED 3MM		RK05		4822 051 30102	1k Ω $\pm 5\%$ 1/16W	NN05102610
QF01	17 18A	9965 000 07630	MICROPROCESSOR	HU403KT000	RK06		4822 051 30102	1k Ω $\pm 5\%$ 1/16W	NN05102610
			TMP87CM74AF		RK07		4822 051 30123	12k Ω $\pm 5\%$ 1/16W	NN05123610
					RK08		4822 051 30123	12k Ω $\pm 5\%$ 1/16W	NN05123610

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
RK09		4822 051 30151	150 Ω $\pm 5\%$ 1/16W	NN05151610	CC11	7010 /A/C/F	4822 124 90353	ELECT 100 μ F M 10V	OA10701020
RK10		4822 051 30151	150 Ω $\pm 5\%$ 1/16W	NN05151610	CC12	/L/S/U			
RK11		4822 051 30222	2.2k Ω $\pm 5\%$ 1/16W	NN05222610	CC12	17 /F/S 18A	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300
RK12		4822 051 30222	2.2k Ω $\pm 5\%$ 1/16W	NN05222610	CC12	7010 /A/C/F	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300
RK13		4822 051 30759	75 Ω $\pm 5\%$ 1/16W	NN05750610	CC13	/L/S/U			
RK14		4822 051 30759	75 Ω $\pm 5\%$ 1/16W	NN05750610	CC13	17 /F/S 18A	4822 124 90353	ELECT 100 μ F M 10V	OA10701020
RK15		4822 051 30222	2.2k Ω $\pm 5\%$ 1/16W	NN05222610	CC13	7010 /A/C/F	4822 124 90353	ELECT 100 μ F M 10V	OA10701020
RK16		4822 051 30222	2.2k Ω $\pm 5\%$ 1/16W	NN05222610	CC14	/L/S/U			
			PK01-SEMICONDUCTORS		CC14	17 /F/S 18A		CER. 18pF $\pm 5\%$ 50V	DD95180300
QK01		4822 209 31378	IC NJM4556	HC10045090	CC14	7010 /A/C/F		CER. 18pF $\pm 5\%$ 50V	DD95180300
QK03					CC15	/L/S/U			
QK06		4822 130 63601	CHIP TRS. 2SC4213	HX342132A0	CC15	17 /F/S 18A	4822 124 12389	ELECT 47 μ F 16V	EQ47601630
					CC15	7010 /A/C/F	4822 124 12389	ELECT 47 μ F 16V	EQ47601630
			PK01-MISCELLANEOUS		CC16	/L/S/U			
FK01		4822 157 10416	BLM11B102S 1608	FN31010030	CC16	17 /F/S 18A		CER. 18pF $\pm 5\%$ 50V	DD95180300
			EMIFILTER		CC16	7010 /A/C/F		CER. 18pF $\pm 5\%$ 50V	DD95180300
FK02		4822 157 10416	BLM11B102S 1608	FN31010030	CC17	/L/S/U			
			EMIFILTER		CC17	17 /F/S 18A	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300
FK03		4822 157 10416	BLM11B102S 1608	FN31010030	CC17	7010 /A/C/F	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300
			EMIFILTER		CC18	/L/S/U			
JK02	17 18A GOLD	4822 267 31692	JACK HLJ0540-01-430	YJ01003880	CC18	17 /F/S 18A	4822 124 90352	ELECT 10 μ F M 16V	OA10601620
			GRAY		CC18	7010 /A/C/F	4822 124 90352	ELECT 10 μ F M 16V	OA10601620
JK02	BLACK	9965 000 01662	JACK HLJ0540-01-410	YJ01003870	CC19	/L/S/U			
					CC19	17 /F/S 18A	4822 124 80067	ELECT 4.7 μ F M 50V	OA47505020
					CC19	7010 /A/C/F	4822 124 80067	ELECT 4.7 μ F M 50V	OA47505020
			PL01-LED CIRCUIT BOARD			/L/S/U			
RF18	7010	4822 051 30222	CHIP RES.	NN05222610	CD01	17 18A	9965 000 02015	ELECT 22 μ F M 25V	OA22602540
			2.2k Ω $\pm 5\%$ 1/16W		CD01	7010 /A/C/F	9965 000 02015	ELECT 22 μ F M 25V	OA22602540
DF04	7010	4822 130 11569	L.E.D. HLMF-K200	HI10005340		/N/S/U			
			RED 3MM		CD02		4822 124 41539	ELECT 47 μ F M 16V	OA47601620
			PM01-MAIN CIRCUIT BOARD		CD03		4822 126 11687	CER. 0.1 μ F +80 -20% 25V	DK98104200
			PM01-CAPACITORS		CD04	17 18A	9965 000 02015	ELECT 22 μ F M 25V	OA22602540
CC01	17 /F/S 18A	4822 124 41539	ELECT 47 μ F M 16V	OA47601620	CD04	7010 /A/C/F	9965 000 02015	ELECT 22 μ F M 25V	OA22602540
CC01	7010 /A/C/F	4822 124 41539	ELECT 47 μ F M 16V	OA47601620		/N/S/U			
	/L/S/U				CD05		4822 124 41539	ELECT 47 μ F M 16V	OA47601620
CC02	17 /F/S 18A	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	CD06		4822 126 11687	CER. 0.1 μ F +80 -20% 25V	DK98104200
CC02	7010 /A/C/F	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	CD07		4822 126 11687	CER. 0.1 μ F +80 -20% 25V	DK98104200
	/L/S/U				CD08		4822 124 41539	ELECT 47 μ F M 16V	OA47601620
CC03	17 /F/S 18A	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	CD09		4822 126 11687	CER. 0.1 μ F +80 -20% 25V	DK98104200
CC03	7010 /A/C/F	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	CD10		4822 124 41539	ELECT 47 μ F M 16V	OA47601620
	/L/S/U				CD18		4822 122 31765	CER. 100pF $\pm 5\%$ 50V	DD95101300
CC04	17 /F/S 18A	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	CH01		9965 000 04966	FILM 1200pF 122J 100V	OF15122540
CC04	7010 /A/C/F	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	CH02		9965 000 04966	FILM 1200pF 122J 100V	OF15122540
	/L/S/U				CH03		9965 000 01344	FILM 100pF J 100V	OF15101540
CC05	17 /F/S 18A	4822 124 90371	ELECT 470 μ F M 10V	OA47701020	CH04		9965 000 01344	FILM 100pF J 100V	OF15101540
CC05	7010 /A/C/F	4822 124 90371	ELECT 470 μ F M 10V	OA47701020	CH05		4822 126 11671	CER. 33pF $\pm 5\%$ 50V	DD95330300
	/L/S/U				CH06		4822 126 11671	CER. 33pF $\pm 5\%$ 50V	DD95330300
CC06	17 /F/S 18A	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	CP01	17 18A	4822 124 40785	ELECT 3300 μ F M 25V	OA338025S0
CC06	7010 /A/C/F	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	CP01	7010	4822 124 21511	ELECT 2200 μ F 25V	OA22802520
	/L/S/U				CP02	17 18A	4822 124 40785	ELECT 3300 μ F M 25V	OA338025S0
CC07	17 /F/S 18A	4822 124 12389	ELECT 47 μ F 16V	EQ47601630	CP02	7010	4822 124 21511	ELECT 2200 μ F 25V	OA22802520
CC07	7010 /A/C/F	4822 124 12389	ELECT 47 μ F 16V	EQ47601630	CP03		4822 124 40723	ELECT 2200 μ F M 16V	OA22801620
	/L/S/U				CP04		4822 124 90351	ELECT 0.1 μ F M 50V	OA10405020
CC08	17 /F/S 18A	9965 000 04997	CER. 5pF ± 0.25 pF 50V	DD90050300	CP05		4822 124 90352	ELECT 10 μ F M 16V	OA10601620
CC08	17 /N 7010 /N	4822 122 33761	CER. 22pF $\pm 5\%$ 50V	DD95220300	▲ CP06		9965 000 04979	FILM 0.1 μ F AC250V	DF17104630
CC08	7010 /A/C/F	9965 000 04997	CER. 5pF ± 0.25 pF 50V	DD90050300	▲ CP07		9965 000 04979	FILM 0.1 μ F AC250V	DF17104630
	/L/S/U				▲ CP08	18A	9965 000 07801	CER. 220pF B 250V	DK17221520
CC09	17 /F/S 18A	4822 124 12389	ELECT 47 μ F 16V	EQ47601630		/A/C/K/S			
CC09	7010 /A/C/F	4822 124 12389	ELECT 47 μ F 16V	EQ47601630	▲ CP08	7010	9965 000 07801	CER. 220pF B 250V	DK17221520
	/L/S/U				▲ CP08	/A/C/N/S			
CC10	17 /F/S 18A	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	▲ CP08	18A /L/U		CER. 220pF B 250V	DK17471520
CC10	7010 /A/C/F	4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	▲ CP09	7010 /F/L/U			
	/L/S/U				▲ CP09	18A	9965 000 07801	CER. 220pF B 250V	DK17221520
CC11	17 /F/S 18A	4822 124 90353	ELECT 100 μ F M 10V	OA10701020	▲ CP09	/A/C/K/S			
					▲ CP09	7010	9965 000 07801	CER. 220pF B 250V	DK17221520
						/A/C/N/S			

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
▲ CP09	18A/L/U		CER. 220pF B 250V	DK17471520
▲ CP10	7010 /F/L/U		ELECT 220μF 200V	EA227200P0
▲ CP10	17 /S/N	9965 000 04981	ELECT 120μF 400V	EA12740070
▲ CP10	18A	4822 124 23114	ELECT 82μF 400V	EA82640010
	/A/C/K/S			
▲ CP10	7010	4822 124 23114	ELECT 82μF 400V	EA82640010
	/A/C/N/S			
▲ CP10	18A/L/U		ELECT 82μF200V	EA82620070
	7010 /F/L/U			
CP11	18A 7010	9965 000 04982	CER. 150pF 2KV	DK16151910
▲ CP12		4822 126 13091	FILM 0.047μF 250V	DF16473640
CP13	18A 7010	9965 000 04982	CER. 150pF 2KV	DK16151910
▲ CP14	18A 7010	9965 000 07801	CER. 220pF 250V	DK17221520
CP15		4822 121 42327	FILM 470pF J M 50V	DF15471350
CP16	17 /F 18A	4822 121 42327	FILM 470pF J M 50V	DF15471350
	/L/U 7010 /A			
	/C/F/L/N/U			
CP18			FILM 0.22μF J M 50V	DF15224350
CP19		9965 000 01318	ELECT 220μF M 10V	OA22701020
CP20	18A 7010	4822 122 30043	CER. 0.01μF Z 50V	DK18103310
CP21	18A 7010	4822 122 30043	CER. 0.01μF Z 50V	DK18103310
CP22		4822 124 22276	ELECT 47μF M 50V	OA47605020
CP24		9965 000 04984	ELECT 1000μF M 10V	OA10801020
CP25		9965 000 01318	ELECT 220μF M 10V	OA22701020
CP26		9965 000 01318	ELECT 220μF M 10V	OA22701020
CP27		4822 124 22722	ELECT 1000μF M 16V	OA10801620
CP28		4822 124 22722	ELECT 1000μF M 16V	OA10801620
CP29	17 /N 7010 /N	4822 124 12404	ELECT 220μF M 16V	OA22701620
CP30		9965 000 04984	ELECT 1000μF M 10V	OA10801020
CP31		9965 000 01318	ELECT 220μF M 10V	OA22701020
CP32		4822 124 12404	ELECT 220μF M 16V	OA22701620
CP33		9965 000 01318	ELECT 220μF M 10V	OA22701020
CP34		9965 000 01318	ELECT 220μF M 10V	OA22701020
CP35		4822 124 41539	ELECT 47μF M 16V	OA47601620
CP36		4822 124 90351	ELECT 0.1μF M 50V	OA10405020
CP37		9965 000 01318	ELECT 220μF M 10V	OA22701020
CP38	17 /N 7010 /N	4822 124 12404	ELECT 220μF M 16V	OA22701620
CP39	17 /N 7010 /N	4822 124 12404	ELECT 220μF M 16V	OA22701620
CP40		4822 124 80772	ELECT 47μF M 35V	OA47603520
CP41	17 18A	4822 124 90371	ELECT 470μF M 10V	OA47701020
CS01		4822 124 41539	ELECT 47μF M 16V	OA47601620
CS02		4822 124 41539	ELECT 47μF M 16V	OA47601620
CS03	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640
CS03	7010	4822 124 12404	ELECT 220μF M 16V	OA22701620
CS04	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640
CS04	7010	4822 124 12404	ELECT 220μF M 16V	OA22701620
CS05	17 18A	4822 124 40433	ELECT 47μF M 16V	OA47601640
CS05	7010	4822 124 40433	ELECT 47μF M 16V	OA47601640
	/A/C/F/N/S			
CS05	7010 /L/U	4822 124 41539	ELECT 47μF M 16V	OA47601620
CS06	17 18A	4822 124 40433	ELECT 47μF M 16V	OA47601640
CS06	7010	4822 124 40433	ELECT 47μF M 16V	OA47601640
	/A/C/F/N/S			
CS06	7010 /L/U	4822 124 41539	ELECT 47μF M 16V	OA47601620
CS07	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640
CS07	7010	4822 124 12404	ELECT 220μF M 16V	OA22701620
CS08	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640
CS08	7010	4822 124 12404	ELECT 220μF M 16V	OA22701620
CS09	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640
CS09	7010	4822 124 12404	ELECT 220μF M 16V	OA22701620
CS10	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640
CS10	7010	4822 124 12404	ELECT 220μF M 16V	OA22701620
CS11	17 18A	9965 000 02015	ELECT 22μF M 25V	OA22602540
CS11	7010	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
CS12	17 18A	9965 000 02015	ELECT 22μF M 25V	OA22602540
CS12	7010	4822 124 80067	ELECT 4.7μF M 50V	OA47505020
CS13	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
CS13	7010	4822 124 80123	ELECT 220μF M 16V	OA22701640
	/A/C/F/N/S			
CS13	7010 /L/U	4822 124 12404	ELECT 220μF M 16V	OA22701620
CS14	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640
CS14	7010	4822 124 80123	ELECT 220μF M 16V	OA22701640
	/A/C/F/N/S			
CS14	7010 /L/U	4822 124 12404	ELECT 220μF M 16V	OA22701620
CS15	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640
CS16	17 18A	4822 124 80123	ELECT 220μF M 16V	OA22701640
CS17		4822 122 31765	CER. 100pF ±5% 50V	DD95101300
CS18		4822 122 31765	CER. 100pF ±5% 50V	DD95101300
CS21		4822 126 11687	CER. 0.1μF +80 -20% 25V	DK98104200
CS22		4822 122 33777	CER. 47pF ±5% 50V	DD95470300
CS23		4822 126 11685	CER. 4700pF ±10% 50V	DK96472300
CS24		4822 126 11704	CER. 0.022μF +80 -20% 50V	DK98223300
CS25		4822 124 41539	ELECT 47μF M 16V	OA47601620
CS26		4822 126 13883	CER. 220pF ±5% 50V	DD95221300
CS27		4822 126 11687	CER. 0.1μF +80 -20% 25V	DK98104200
CS29		9965 000 05002	FILM 3900pF J 100V	OF15392540
CS30		9965 000 05002	FILM 3900pF J 100V	OF15392540
CS31		4822 124 41539	ELECT 47μF M 16V	OA47601620
CS35	17 18A	4822 124 90371	ELECT 470μF M 10V	OA47701020
CS35	7010	4822 124 90371	ELECT 470μF M 10V	OA47701020
	/A/C/F/N/S			
CS35	7010 /L/U	4822 124 12404	ELECT 220μF M 16V	OA22701620
CS52		4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
CV01		4822 124 90371	ELECT 470μF M 10V	OA47701020
CV02		4822 124 90371	ELECT 470μF M 10V	OA47701020
CV03		4822 124 90353	ELECT 100μF M 10V	OA10701020
CV04	17 /F/S 18A		CER. 12pF ±5% 50V	DD95120300
CV04	7010 /A/C/F		CER. 12pF ±5% 50V	DD95120300
	/L/S/U			
CV04	17 /N 7010 /N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300
CV05	17 /F/S 18A	4822 122 33752	CER. 15pF ±5% 50V	DD95150300
CV05	7010 /A/C/F	4822 122 33752	CER. 15pF ±5% 50V	DD95150300
	/L/S/U			
CV05	17 /N 7010 /N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300
CV06		4822 122 33782	CER. 56pF ±5% 50V	DD95560300
CV07	17 /F/S 18A		CER. 18pF ±5% 50V	DD95180300
CV07	7010 /A/C/F		CER. 18pF ±5% 50V	DD95180300
	/L/S/U			
CV07	17 /N 7010 /N	4822 122 33741	CER. 10pF ±0.5pF 50V	DD91100300
CV08	17 /F/S 18A	4822 122 33777	CER. 47pF ±5% 50V	DD95470300
CV08	7010 /A/C/F	4822 122 33777	CER. 47pF ±5% 50V	DD95470300
	/L/S/U			
CV08	17 /N 7010 /N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300
CV09		4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
CV10		4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
CV11	17 /F/S 18A		CER. 12pF ±5% 50V	DD95120300
CV11	7010 /A/C/F		CER. 12pF ±5% 50V	DD95120300
	/L/S/U			
CV11	17 /N 7010 /N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300
CV12	17 /F/S 18A	4822 122 33752	CER. 15pF ±5% 50V	DD95150300
CV12	7010 /A/C/F	4822 122 33752	CER. 15pF ±5% 50V	DD95150300
	/L/S/U			
CV12	17 /N 7010 /N	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300
CV13		4822 122 33782	CER. 56pF ±5% 50V	DD95560300
CV14	17 /F/S 18A		CER. 18pF ±5% 50V	DD95180300
CV14	7010 /A/C/F		CER. 18pF ±5% 50V	DD95180300
	/L/S/U			
CV14	17 /N 7010 /N	4822 122 33741	CER. 10pF ±0.5pF 50V	DD91100300
CV15	17 /F/S 18A	4822 122 33777	CER. 47pF ±5% 50V	DD95470300
CV15	7010 /A/C/F	4822 122 33777	CER. 47pF ±5% 50V	DD95470300
	/L/S/U			
CV15	17 /N 7010 /N	4822 122 33782	CER. 56pF ±5% 50V	DD95560300
CV16		4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
CV17		4822 126 11703	CER. 0.01μF +80 -20% 50V	DK98103300
CV18	17 /F/S 18A		CER. 12pF ±5% 50V	DD95120300

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
CV18	7010 /A/C/F /L/S/U		CER. 12pF $\pm 5\%$ 50V	DD95120300	RC06	17	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV18	17 /N 7010 /N	9965 000 04997	CER. 5pF ± 0.25 pF CH 50V	DD90050300	RC06	7010 /A/C/F /L/S/U	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV19	17 /F/S 18A	4822 122 33752	CER. 15pF $\pm 5\%$ 50V	DD95150300	RC07	17 /F/S 18A	4822 117 11817	CHIP 1.2k Ω $\pm 5\%$ 1/16W	NN05122610
CV19	7010 /A/C/F /L/S/U	4822 122 33752	CER. 15pF $\pm 5\%$ 50V	DD95150300	RC07	7010 /A/C/F /L/S/U	4822 117 11817	CHIP 1.2k Ω $\pm 5\%$ 1/16W	NN05122610
CV19	17 /N 7010 /N	9965 000 04997	CER. 5pF ± 0.25 pF CH 50V	DD90050300	RC07	17 /N 7010 /N	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV20		4822 122 33782	CER. 56pF $\pm 5\%$ CH 50V	DD95560300	RC08	17 /F/S 18A	4822 051 30272	CHIP 2.7k Ω $\pm 5\%$ 1/16W	NN05272610
CV21	17 /F/S 18A		CER. 18pF $\pm 5\%$ 50V	DD95180300	RC08	7010 /A/C/F /L/S/U	4822 051 30272	CHIP 2.7k Ω $\pm 5\%$ 1/16W	NN05272610
CV21	7010 /U		CER. 18pF $\pm 5\%$ 50V	DD95180300	RC09	17 /F/S 18A	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV21	17 /N 7010 /N	4822 122 33741	CER. 10pF ± 0.5 pF CH 50V	DD91100300	RC09	7010 /A/C/F /L/S/U	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV22	17 /F/S 18A	4822 122 33777	CER. 47pF $\pm 5\%$ 50V	DD95470300	RC10	17 /F/S 18A	9965 000 05009	CHIP 39 Ω $\pm 5\%$ 1/16W	NN05390610
CV22	7010 /U	4822 122 33777	CER. 47pF $\pm 5\%$ 50V	DD95470300	RC10	7010 /A/C/F /L/S/U	9965 000 05009	CHIP 39 Ω $\pm 5\%$ 1/16W	NN05390610
CV22	17 /N 7010 /N	4822 122 33782	CER. 56pF $\pm 5\%$ CH 50V	DD95560300	RC11	17 /F/S 18A	4822 051 30339	CHIP 33 Ω $\pm 5\%$ 1/16W	NN05330610
CV23		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC11	7010 /A/C/F /L/S/U	4822 051 30339	CHIP 33 Ω $\pm 5\%$ 1/16W	NN05330610
CV26					RC12	17 /F/S 18A	4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
CV27		4822 124 90371	ELECT 470 μ F M 10V	OA47701020	RC12	7010 /A/C/F /L/S/U	4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
CV28		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC13	17 /F/S 18A	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV29		4822 124 12389	ELECT 47 μ F 16V	EQ47601630	RC13	7010 /A/C/F /L/S/U	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV30		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC14	17 /F/S 18A	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV31		4822 124 90353	ELECT 100 μ F M 10V	OA10701020	RC14	7010 /A/C/F /L/S/U	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV32		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC15	17 /F/S 18A	4822 117 12968	CHIP 820 Ω $\pm 5\%$ 1/16W	NN05821610
CV33		4822 124 90353	ELECT 100 μ F M 10V	OA10701020	RC15	7010 /A/C/F /L/S/U	4822 117 12968	CHIP 820 Ω $\pm 5\%$ 1/16W	NN05821610
CV34	17 /F/S 18A	9965 000 04997	CER. 5pF ± 0.25 pF 50V	DD90050300	RC16	17 /F/S 18A	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV34	7010 /U	9965 000 04997	CER. 5pF ± 0.25 pF 50V	DD90050300	RC16	7010 /A/C/F /L/S/U	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV34	17 /N 7010 /N	4822 122 33761	CER. 22pF $\pm 5\%$ 50V	DD95220300	RC17	17 /F/S 18A	9965 000 05009	CHIP 39 Ω $\pm 5\%$ 1/16W	NN05390610
CV35		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC17	7010 /A/C/F /L/S/U	9965 000 05009	CHIP 39 Ω $\pm 5\%$ 1/16W	NN05390610
CV36	17 /F/S 18A	9965 000 04997	CER. 5pF ± 0.25 pF 50V	DD90050300	RC18	17 /F/S 18A	4822 051 30339	CHIP 33 Ω $\pm 5\%$ 1/16W	NN05330610
CV36	7010 /U	9965 000 04997	CER. 5pF ± 0.25 pF 50V	DD90050300	RC18	7010 /A/C/F /L/S/U	4822 051 30339	CHIP 33 Ω $\pm 5\%$ 1/16W	NN05330610
CV36	17 /N 7010 /N	4822 122 33761	CER. 22pF $\pm 5\%$ 50V	DD95220300	RC19	17 /F/S 18A	4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
CV37		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC19	7010 /A/C/F /L/S/U	4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
CV38		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC20	17 /F/S 18A	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV39		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC20	7010 /A/C/F /L/S/U	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV40		4822 124 90371	ELECT 470 μ F M 10V	OA47701020	RC21	17 /F/S 18A	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV41		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC21	7010 /A/C/F /L/S/U	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV42		4822 124 12389	ELECT 47 μ F 16V	EQ47601630	RC22	17 /F/S 18A	4822 117 12968	CHIP 820 Ω $\pm 5\%$ 1/16W	NN05821610
CV43		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC22	7010 /A/C/F /L/S/U	4822 117 12968	CHIP 820 Ω $\pm 5\%$ 1/16W	NN05821610
CV44		4822 124 90353	ELECT 100 μ F M 10V	OA10701020	RC23	17 /F/S 18A	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV45		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC23	7010 /A/C/F /L/S/U	4822 051 30471	CHIP 470 Ω $\pm 5\%$ 1/16W	NN05471610
CV46		4822 124 90353	ELECT 100 μ F M 10V	OA10701020	RC24	17 /F/S 18A	9965 000 05009	CHIP 39 Ω $\pm 5\%$ 1/16W	NN05390610
CV47	17 /F/S 18A	9965 000 04997	CER. 5pF ± 0.25 pF 50V	DD90050300	RC24	7010 /A/C/F /L/S/U	9965 000 05009	CHIP 39 Ω $\pm 5\%$ 1/16W	NN05390610
CV47	7010 /U	9965 000 04997	CER. 5pF ± 0.25 pF 50V	DD90050300	RC25	17 /F/S 18A	4822 051 30339	CHIP 33 Ω $\pm 5\%$ 1/16W	NN05330610
CV47	17 /N 7010 /N	4822 122 33761	CER. 22pF $\pm 5\%$ 50V	DD95220300	RC25	7010 /A/C/F /L/S/U	4822 051 30339	CHIP 33 Ω $\pm 5\%$ 1/16W	NN05330610
CV48					RC26	17 /F/S 18A		CHIP 330 Ω $\pm 5\%$ 1/16W	NN05331610
CV48		4822 126 11703	CER. 0.01 μ F +80 -20% 50V	DK98103300	RC26	7010 /A/C/F /L/S/U		CHIP 330 Ω $\pm 5\%$ 1/16W	NN05331610
CV52					RC27	17 /F/S 18A	4822 117 12891	CHIP 220k Ω $\pm 5\%$ 1/16W	NN05224610
CV53		4822 124 90371	ELECT 470 μ F M 10V	OA47701020	RC27	7010 /A/C/F /L/S/U	4822 117 12891	CHIP 220k Ω $\pm 5\%$ 1/16W	NN05224610
CV54		4822 124 90371	ELECT 470 μ F M 10V	OA47701020	RC28	17 /F/S 18A	4822 051 30222	CHIP 2.2k Ω $\pm 5\%$ 1/16W	NN05222610
CV90		4822 126 11687	CER. 0.1 μ F +80 -20% 25V	DK98104200					
CV91		4822 126 11687	CER. 0.1 μ F +80 -20% 25V	DK98104200					
			PM01-RESISTORS						
RC01	17 /F/S 18A		CHIP 150k Ω $\pm 5\%$ 1/16W	NN05154610					
RC01	7010 /A/C/F /L/S/U		CHIP 150k Ω $\pm 5\%$ 1/16W	NN05154610					
RC02	17 /F/S 18A	4822 117 12902	CHIP 8.2k Ω $\pm 5\%$ 1/16W	NN05822610					
RC02	7010 /A/C/F /L/S/U	4822 117 12902	CHIP 8.2k Ω $\pm 5\%$ 1/16W	NN05822610					
RC03	17 /F/S 18A	4822 051 30123	CHIP 12k Ω $\pm 5\%$ 1/16W	NN05123610					
RC03	7010 /A/C/F /L/S/U	4822 051 30123	CHIP 12k Ω $\pm 5\%$ 1/16W	NN05123610					
RC04	17 /F/S 18A	4822 051 30563	CHIP 56k Ω $\pm 5\%$ 1/16W	NN05563610					
RC04	7010 /A/C/F /L/S/U	4822 051 30563	CHIP 56k Ω $\pm 5\%$ 1/16W	NN05563610					
RC05	17 /F/S 18A	4822 051 30334	CHIP 330k Ω $\pm 5\%$ 1/16W	NN05334610					
RC05	7010 /A/C/F /L/S/U	4822 051 30334	CHIP 330k Ω $\pm 5\%$ 1/16W	NN05334610					

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
RC28	7010 /A/C/F /L/S/U	4822 051 30222	CHIP 2.2k Ω $\pm 5\%$ 1/16W	NN05222610
RC29	17 /F/S 18A	4822 051 30681	CHIP 680 Ω $\pm 5\%$ 1/16W	NN05681610
RC29	7010 /A/C/F /L/S/U	4822 051 30681	CHIP 680 Ω $\pm 5\%$ 1/16W	NN05681610
RC30	17 /F/S 18A	4822 051 30681	CHIP 680 Ω $\pm 5\%$ 1/16W	NN05681610
RC30	7010 /A/C/F /L/S/U	4822 051 30681	CHIP 680 Ω $\pm 5\%$ 1/16W	NN05681610
RC31	17 /F/S 18A	4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RC31	7010 /A/C/F /L/S/U	4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RC32	17 /F/S 18A	4822 051 30222	CHIP 2.2k Ω $\pm 5\%$ 1/16W	NN05222610
RC32	7010 /A/C/F /L/S/U	4822 051 30222	CHIP 2.2k Ω $\pm 5\%$ 1/16W	NN05222610
RC33	17 /F/S 18A	4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RC33	7010 /A/C/F /L/S/U	4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RD01		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RD02		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RD03		4822 051 30332	CHIP 3.3k Ω $\pm 5\%$ 1/16W	NN05332610
RD04		4822 116 82487	CHIP 0 Ω $\pm 5\%$ 1/16W	NN05000610
RD12		4822 116 82487	CHIP 0 Ω $\pm 5\%$ 1/16W	NN05000610
RD13		4822 051 30479	CHIP 47 Ω $\pm 5\%$ 1/16W	NN05470610
RH01		4822 117 12902	CHIP 8.2k Ω $\pm 5\%$ 1/16W	NN05822610
RH02		4822 117 12902	CHIP 8.2k Ω $\pm 5\%$ 1/16W	NN05822610
RH03		4822 051 30333	CHIP 33k Ω $\pm 5\%$ 1/16W	NN05333610
RH04		4822 051 30333	CHIP 33k Ω $\pm 5\%$ 1/16W	NN05333610
RH05		4822 051 30472	CHIP 4.7k Ω $\pm 5\%$ 1/16W	NN05472610
RH06		4822 051 30472	CHIP 4.7k Ω $\pm 5\%$ 1/16W	NN05472610
RH07		4822 051 30151	CHIP 150 Ω $\pm 5\%$ 1/16W	NN05151610
RH08		4822 051 30151	CHIP 150 Ω $\pm 5\%$ 1/16W	NN05151610
RH09		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RH10		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RH11		4822 051 30151	CHIP 150 Ω $\pm 5\%$ 1/16W	NN05151610
RH12		4822 051 30151	CHIP 150 Ω $\pm 5\%$ 1/16W	NN05151610
RH13		4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RH14		4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RH15		4822 051 30561	CHIP 560 Ω $\pm 5\%$ 1/16W	NN05561610
RH16		4822 051 30561	CHIP 560 Ω $\pm 5\%$ 1/16W	NN05561610
RH17		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RH18		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RH19		4822 051 30333	CHIP 33k Ω $\pm 5\%$ 1/16W	NN05333610
RH20		4822 051 30333	CHIP 33k Ω $\pm 5\%$ 1/16W	NN05333610
RH21		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RH22		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RH23		4822 051 30561	CHIP 560 Ω $\pm 5\%$ 1/16W	NN05561610
RH24		4822 051 30561	CHIP 560 Ω $\pm 5\%$ 1/16W	NN05561610
RH25		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RH26		4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RH27		4822 051 30333	CHIP 33k Ω $\pm 5\%$ 1/16W	NN05333610
RH28		4822 051 30333	CHIP 33k Ω $\pm 5\%$ 1/16W	NN05333610
RP01		4822 051 30102	CHIP 1k Ω $\pm 5\%$ 1/16W	NN05102610
RP02		4822 051 30223	CHIP 22k Ω $\pm 5\%$ 1/16W	NN05223610
RP03		9965 000 03193	CHIP 3.3M Ω $\pm 5\%$ 1/16W	NN05335610
RP04		4822 117 12925	CHIP 47k Ω $\pm 5\%$ 1/16W	NN05473610
RP05		4822 051 30223	CHIP 22k Ω $\pm 5\%$ 1/16W	NN05223610
RP06		4822 051 30223	CHIP 22k Ω $\pm 5\%$ 1/16W	NN05223610
RP07		4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RP08		4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RP09		4822 117 12925	CHIP 47k Ω $\pm 5\%$ 1/16W	NN05473610
RP10		4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
▲ RP13	17 /F 18A /L/U		2.2M Ω $\pm 10\%$ 1/2W	RC10225820
▲ RP13	7010 /F/L/U		2.2M Ω $\pm 10\%$ 1/2W	RC10225820
▲ RP13	17 /S/N	9965 000 00502	1M Ω $\pm 5\%$ 1W	RC05105010

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
▲ RP13	18A /A/C/K/S	9965 000 00502	1M Ω $\pm 5\%$ 1W	RC05105010
▲ RP13	7010 /A/C/N/S	9965 000 00502	1M Ω $\pm 5\%$ 1W	RC05105010
RP14		4822 053 11823	METAL 82k Ω $\pm 5\%$ 2W	NK05823020
▲ RP17		4822 116 82107	METAL 68k Ω $\pm 5\%$ 3W	NK05683030
▲ RP18		4822 116 82107	METAL 68k Ω $\pm 5\%$ 3W	NK05683030
▲ RP20		9965 000 04992	METAL 0.82 $\pm 5\%$ 2W	NL05822020
RP21	17 /F 18A /L/U	4822 116 82487	CHIP 0 Ω $\pm 5\%$ 1/16W	NN05000610
RP21	7010 /F/L/U	4822 116 82487	CHIP 0 Ω $\pm 5\%$ 1/16W	NN05000610
RP21	18A /A/C/K/S	4822 051 30479	CHIP 47 Ω $\pm 5\%$ 1/16W	NN05470610
RP21	7010 /A/C/N/S	4822 051 30479	CHIP 47 Ω $\pm 5\%$ 1/16W	NN05470610
RP22	17 /S/N	4822 051 30479	CHIP 47 Ω $\pm 5\%$ 1/16W	NN05470610
RP22	18A /A/C/K/S	4822 051 30479	CHIP 47 Ω $\pm 5\%$ 1/16W	NN05470610
RP22	7010 /A/C/N/S	4822 051 30479	CHIP 47 Ω $\pm 5\%$ 1/16W	NN05470610
RP24		4822 051 30682	CHIP 6.8k Ω $\pm 5\%$ 1/16W	NN05682610
RP25		4822 117 12968	CHIP 820 Ω $\pm 5\%$ 1/16W	NN05821610
RP27		4822 116 82487	CHIP 0 Ω $\pm 5\%$ 1/16W	NN05000610
RP28		4822 051 30272	CHIP 2.7k Ω $\pm 5\%$ 1/16W	NN05272610
RP29		4822 051 30391	CHIP 390 Ω $\pm 5\%$ 1/16W	NN05391610
RP30		4822 051 30222	CHIP 2.2k Ω $\pm 5\%$ 1/16W	NN05222610
RP31	17 /F 18A /L/U	4822 051 30102	CHIP 1k Ω $\pm 5\%$ 1/16W	NN05102610
RP31	7010 /F/L/U	4822 051 30102	CHIP 1k Ω $\pm 5\%$ 1/16W	NN05102610
RP32		4822 051 30153	CHIP 15k Ω $\pm 5\%$ 1/16W	NN05153610
RP33		4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RP34		4822 051 30472	CHIP 4.7k Ω $\pm 5\%$ 1/16W	NN05472610
RP35		4822 051 30472	CHIP 4.7k Ω $\pm 5\%$ 1/16W	NN05472610
RP36		4822 051 30392	CHIP 3.9k Ω $\pm 5\%$ 1/16W	NN05392610
RP37		4822 051 30392	CHIP 3.9k Ω $\pm 5\%$ 1/16W	NN05392610
RP38		4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RP39	17 /F 18A /L/U	4822 051 30152	CHIP 1.5k Ω $\pm 5\%$ 1/16W	NN05152610
RP39	7010 /F/L/U	4822 051 30152	CHIP 1.5k Ω $\pm 5\%$ 1/16W	NN05152610
RP40	17 /F 18A /L/U	4822 051 30332	CHIP 3.3k Ω $\pm 5\%$ 1/16W	NN05332610
RP40	7010 /F/L/U	4822 051 30332	CHIP 3.3k Ω $\pm 5\%$ 1/16W	NN05332610
RP43		4822 051 30223	CHIP 22k Ω $\pm 5\%$ 1/16W	NN05223610
RP44		4822 051 30152	CHIP 1.5k Ω $\pm 5\%$ 1/16W	NN05152610
RP45		4822 051 30152	CHIP 1.5k Ω $\pm 5\%$ 1/16W	NN05152610
RP46		4822 051 30681	CHIP 680 Ω $\pm 5\%$ 1/16W	NN05681610
RP47		4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RP48		4822 051 30103	CHIP 10k Ω $\pm 5\%$ 1/16W	NN05103610
RP49		4822 051 30472	CHIP 4.7k Ω $\pm 5\%$ 1/16W	NN05472610
RP50		4822 051 30472	CHIP 4.7k Ω $\pm 5\%$ 1/16W	NN05472610
RP51		4822 051 30391	CHIP 390 Ω $\pm 5\%$ 1/16W	NN05391610
RP55		4822 116 82487	CHIP 0 Ω $\pm 5\%$ 1/16W	NN05000610
RP56		4822 051 30681	CHIP 680 Ω $\pm 5\%$ 1/16W	NN05681610
RP57		4822 051 30682	CHIP 6.8k Ω $\pm 5\%$ 1/16W	NN05682610
RP58		4822 051 30682	CHIP 6.8k Ω $\pm 5\%$ 1/16W	NN05682610
RP59		4822 051 30393	CHIP 39k Ω $\pm 5\%$ 1/16W	NN05393610
RP60		4822 051 30153	CHIP 15k Ω $\pm 5\%$ 1/16W	NN05153610
RS01		4822 051 30223	CHIP 22k Ω $\pm 5\%$ 1/16W	NN05223610
RS02		4822 051 30223	CHIP 22k Ω $\pm 5\%$ 1/16W	NN05223610
RS03	17 18A	4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RS04	17 18A	4822 051 30101	CHIP 100 Ω $\pm 5\%$ 1/16W	NN05101610
RS05		4822 051 30102	CHIP 1k Ω $\pm 5\%$ 1/16W	NN05102610
RS06		4822 051 30102	CHIP 1k Ω $\pm 5\%$ 1/16W	NN05102610
RS08		4822 116 82487	CHIP 0 Ω $\pm 5\%$ 1/16W	NN05000610
RS09		4822 116 82487	CHIP 0 Ω $\pm 5\%$ 1/16W	NN05000610
RS11				
RS14		9965 000 05003	33 Ω $\pm 5\%$ 1/6W	GG05330160

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
▲ RS15 }		4822 116 60309	FUSIBLE 2.2 Ω ±5% 1/4W	NH05022140
▲ RS18				
RS19		4822 051 30223	CHIP 22k Ω ±5% 1/16W	NN05223610
RS20		4822 051 30223	CHIP 22k Ω ±5% 1/16W	NN05223610
RS21		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RS22		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RS25 }		4822 051 30151	CHIP 150 Ω ±5% 1/16W	NN05151610
RS28				
RS29 }		4822 051 30222	CHIP 2.2k Ω ±5% 1/16W	NN05222610
RS32				
RS33		4822 117 12891	CHIP 220k Ω ±5% 1/16W	NN05224610
RS34		4822 117 12891	CHIP 220k Ω ±5% 1/16W	NN05224610
RS35		4822 051 30223	CHIP 22k Ω ±5% 1/16W	NN05223610
RS36		4822 051 30223	CHIP 22k Ω ±5% 1/16W	NN05223610
RS37		4822 051 30101	CHIP 100 Ω ±5% 1/16W	NN05101610
RS38		4822 051 30759	CHIP 75 Ω ±5% 1/16W	NN05750610
RS39		4822 051 30221	CHIP 220 Ω ±5% 1/16W	NN05221610
RS41		4822 117 12139	CHIP 22 Ω ±5% 1/16W	NN05220610
RS43		4822 051 30223	CHIP 22k Ω ±5% 1/16W	NN05223610
RS44		4822 051 30223	CHIP 22k Ω ±5% 1/16W	NN05223610
RS47		4822 117 12968	CHIP 820 Ω ±5% 1/16W	NN05821610
RS48		4822 117 12968	CHIP 820 Ω ±5% 1/16W	NN05821610
RS49	17 /N 7010 /N	4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RS50	17 /N 7010 /N	4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RS51		4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RS52		4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RS57	7010	4822 117 12968	CHIP 820 Ω ±5% 1/16W	NN05821610
RS58	7010	4822 117 12968	CHIP 820 Ω ±5% 1/16W	NN05821610
RS63	7010	4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RS64	7010	4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RV01		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV02		4822 051 30223	CHIP 22k Ω ±5% 1/16W	NN05223610
RV03		4822 051 30222	CHIP 2.2k Ω ±5% 1/16W	NN05222610
RV04		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV05		4822 051 30223	CHIP 22k Ω ±5% 1/16W	NN05223610
RV06		4822 051 30222	CHIP 2.2k Ω ±5% 1/16W	NN05222610
RV07		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV08		4822 051 30223	CHIP 22k Ω ±5% 1/16W	NN05223610
RV09		4822 051 30222	CHIP 2.2k Ω ±5% 1/16W	NN05222610
RV10	17 /N 7010 /N	4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RV11	17 /N 7010 /N	4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RV12	17 /N 7010 /N	4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RV13	17 /F/S 18A		CHIP 150k Ω ±5% 1/16W	NN05154610
RV13	7010 /A/C/F /L/S/U		CHIP 150k Ω ±5% 1/16W	NN05154610
RV14		4822 117 12902	CHIP 8.2k Ω ±5% 1/16W	NN05822610
RV15		4822 051 30123	CHIP 12k Ω ±5% 1/16W	NN05123610
RV16		4822 051 30563	CHIP 56k Ω ±5% 1/16W	NN05563610
RV17		4822 051 30334	CHIP 330k Ω ±5% 1/16W	NN05334610
RV18		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV19	17 /F/S 18A	4822 117 11817	CHIP 1.2k Ω ±5% 1/16W	NN05122610
RV19	7010 /A/C/F /L/S/U	4822 117 11817	CHIP 1.2k Ω ±5% 1/16W	NN05122610
RV19	17 /N 7010 /N	4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV20	17 /F/S 18A	4822 051 30272	CHIP 2.7k Ω ±5% 1/16W	NN05272610
RV20	7010 /A/C/F /L/S/U	4822 051 30272	CHIP 2.7k Ω ±5% 1/16W	NN05272610
RV21		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV22		9965 000 05009	CHIP 39 Ω ±5% 1/16W	NN05390610
RV23		4822 051 30339	CHIP 33 Ω ±5% 1/16W	NN05330610
RV24		9965 000 05009	CHIP 39 Ω ±5% 1/16W	NN05390610
RV25		4822 051 30339	CHIP 33 Ω ±5% 1/16W	NN05330610
RV26		4822 051 30103	CHIP 10k Ω ±5% 1/16W	NN05103610
RV27		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV28	17 /F/S/N	4822 117 11817	CHIP 1.2k Ω ±5% 1/16W	NN05122610

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
RV28	18A 7010	4822 117 11817	CHIP 1.2k Ω ±5% 1/16W	NN05122610
RV29	17 /F/S 18A	4822 051 30272	CHIP 2.7k Ω ±5% 1/16W	NN05272610
RV29	7010 /A/C/F /L/S/U	4822 051 30272	CHIP 2.7k Ω ±5% 1/16W	NN05272610
RV29	17 /N 7010 /N	4822 051 30102	CHIP 1k Ω ±5% 1/16W	NN05102610
RV30		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV31		9965 000 05009	CHIP 39 Ω ±5% 1/16W	NN05390610
RV32		4822 051 30339	CHIP 33 Ω ±5% 1/16W	NN05330610
RV33	17 /F/S 18A		CHIP 150k Ω ±5% 1/16W	NN05154610
RV33	7010 /A/C/F /L/S/U		CHIP 150k Ω ±5% 1/16W	NN05154610
RV34		4822 117 12902	CHIP 8.2k Ω ±5% 1/16W	NN05822610
RV35		4822 051 30123	CHIP 12k Ω ±5% 1/16W	NN05123610
RV36		4822 051 30563	CHIP 56k Ω ±5% 1/16W	NN05563610
RV37		4822 051 30334	CHIP 330k Ω ±5% 1/16W	NN05334610
RV38		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV39	17 /F/S 18A	4822 117 11817	CHIP 1.2k Ω ±5% 1/16W	NN05122610
RV39	7010 /A/C/F /L/S/U	4822 117 11817	CHIP 1.2k Ω ±5% 1/16W	NN05122610
RV39	17 /N 7010 /N	4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV40	17 /F/S 18A	4822 051 30272	CHIP 2.7k Ω ±5% 1/16W	NN05272610
RV40	7010 /A/C/F /L/S/U	4822 051 30272	CHIP 2.7k Ω ±5% 1/16W	NN05272610
RV41		4822 051 30471	CHIP 470 Ω ±5% 1/16W	NN05471610
RV42		9965 000 05009	CHIP 39 Ω ±5% 1/16W	NN05390610
RV43		4822 051 30339	CHIP 33 Ω ±5% 1/16W	NN05330610
RV44		4822 051 30101	CHIP 100 Ω ±5% 1/16W	NN05101610
RV45		4822 051 30681	CHIP 680 Ω ±5% 1/16W	NN05681610
RV46		4822 051 30101	CHIP 100 Ω ±5% 1/16W	NN05101610
RV47		4822 051 30681	CHIP 680 Ω ±5% 1/16W	NN05681610
RV48		4822 051 30101	CHIP 100 Ω ±5% 1/16W	NN05101610
RV49		4822 051 30681	CHIP 680 Ω ±5% 1/16W	NN05681610
RV50		4822 117 11817	CHIP 1.2k Ω ±5% 1/16W	NN05122610
RV51		4822 051 30102	CHIP 1k Ω ±5% 1/16W	NN05102610
RV52		4822 051 30103	CHIP 10k Ω ±5% 1/16W	NN05103610
RV53		4822 051 30222	CHIP 2.2k Ω ±5% 1/16W	NN05222610
RV54		4822 051 30222	CHIP 2.2k Ω ±5% 1/16W	NN05222610
RV55		4822 051 30103	CHIP 10k Ω ±5% 1/16W	NN05103610
RV56		4822 051 30103	CHIP 10k Ω ±5% 1/16W	NN05103610
RV71		4822 051 30221	CHIP 220 Ω ±5% 1/16W	NN05221610
RV72		4822 051 30101	CHIP 100 Ω ±5% 1/16W	NN05101610
RV73		4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RV74		4822 051 30101	CHIP 100 Ω ±5% 1/16W	NN05101610
RV75		4822 051 30101	CHIP 100 Ω ±5% 1/16W	NN05101610
RV76		4822 051 30101	CHIP 100 Ω ±5% 1/16W	NN05101610
RV77		4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RV78		4822 116 82487	CHIP 0 Ω ±5% 1/16W	NN05000610
RV79		4822 051 30103	CHIP 10k Ω ±5% 1/16W	NN05103610
RV80		4822 051 30153	CHIP 15k Ω ±5% 1/16W	NN05153610
RV81		4822 051 30682	CHIP 6.8k Ω ±5% 1/16W	NN05682610
RV82		4822 051 30103	CHIP 10k Ω ±5% 1/16W	NN05103610
RV84	7010 /S	4822 051 30472	CHIP 4.7k Ω ±5% 1/16W	NN05472610
RV90 }		4822 051 30103	CHIP 10k Ω ±5% 1/16W	NN05103610
RV93				
DD01		9965 000 03119	CHIP DIODE ZENER MA8033-H 3.3V	HZ30012020
DH01		4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000
DH02		4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000
DH03 }		4822 130 81324	CHIP DIODE 1SS302	HZ20018050
DH06				
PM01-SEMICONDUCTORS				

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
▲ DP01 }		9965 000 04986	CHIP DIODE U1BC44 1A/100V	HZ20032050	QC05	7010 /A/C/F /L/S/U	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
▲ DP04 DP05 }		9965 000 04986	CHIP DIODE U1BC44 1A/100V	HZ20032050	QC06	17 /F/S 18A	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
DP08 DP09		4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000	QC06	7010 /A/C/F /L/S/U	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
DP10		4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000	QC07	17 /F/S 18A	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
DP11		9965 000 07632	CHIP DIODE ZENER MA8056-L 5.6V	HZ30007020	QC07	7010 /A/C/F /L/S/U	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
▲ DP12		4822 130 81248	DIODE S1WB(A)60 30A 600V	HD20031290	QC08	17 /F/S 18A	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
▲ DP13 DP14		4822 130 81244 4822 130 83715	DIODE ERA22-10 CHIP DIODE 1SS301 DAN202U	HD20008130 HZ21005000	QC08	7010 /A/C/F /L/S/U	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
DP15	17 18A /L/U	4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000	QC09	17 /F/S 18A	4822 130 61906	SEMICON.COMP DTC114EU	BA20035210
DP15	7010 /F/L/U	4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000	QC09	7010 /A/C/F /L/S/U	4822 130 61906	SEMICON.COMP DTC114EU	BA20035210
DP16	17 18A /L/U	4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000	QC10	17 /F/S 18A	4822 130 61906	SEMICON.COMP DTC114EU	BA20035210
DP16	7010 /F/L/U	4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000	QC10	7010 /A/C/F /L/S/U	4822 130 61906	SEMICON.COMP DTC114EU	BA20035210
▲ DP19		4822 130 82019	CHIP DIODE SBD SFPL-52 200V 0.9A	HZ20002080	QC11	17 /F/S 18A	4822 130 61906	SEMICON.COMP DTC114EU	BA20035210
▲ DP20		4822 130 82019	CHIP DIODE SBD SFPL-52 200V 0.9A	HZ20002080	QC11	7010 /A/C/F /L/S/U	4822 130 61906	SEMICON.COMP DTC114EU	BA20035210
▲ DP21		9965 000 07633	DIODE SBD RK33 30V 2.5A	HD20052080	QC12	17 /F/S 18A	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
▲ DP22		9965 000 07634	DIODE SBD EK19 90V 1.5A	HD20053080	QC12	7010 /A/C/F /L/S/U	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
▲ DP23		4822 130 11074	DIODE SBD RK46 60V 3.5A	HD20050080	QC13	17 /F/S 18A	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
▲ DP24		4822 130 82019	CHIP DIODE SBD SFPL-52 200V 0.9A	HZ20002080	QC13	7010 /A/C/F /L/S/U	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
DP25		4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000	QD01		9965 000 04649	IC PCM1735	HC10014610
DP26		9965 000 04986	CHIP DIODE U1BC44 1A/100V	HZ20032050	QD02		9965 000 01338	IC TC7SET04F	HC007205K0
DP27		9965 000 07632	CHIP DIODE ZENER MA8056-L 5.6V	HZ30007020	QD03		4822 209 90685	IC TC7SH04FU	HC007705K0
DP28		9965 000 03119	CHIP DIODE ZENER MA8033-H 3.3V	HZ30012020	QH01		4822 130 42839	FET 2SK369 BL VDGS-40V PDO.4W	HF203691B0
DP29		9965 000 04986	CHIP DIODE U1BC44 1A/100V	HZ20032050	QH02		4822 130 42839	FET 2SK369 BL VDGS-40V PDO.4W	HF203691B0
DS01		9965 000 07629	CHIP DIODE MA8039-H	HZ30025020	QH03		4822 130 61425	CHIP TRS. 2SC2873(Y)	HX328731B0
DS02		9965 000 07640	CHIP DIODE UDZ TE-17 10B	HZ30009210	QH04		4822 130 61425	CHIP TRS. 2SC2873(Y)	HX328731B0
DS03		9965 000 07640	CHIP DIODE UDZ TE-17 10B	HZ30009210	QH05		4822 130 42839	FET 2SK369 BL VDGS-40V PDO.4W	HF203691B0
DS04 }		4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000	QH06		4822 130 42839	FET 2SK369 BL VDGS-40V PDO.4W	HF203691B0
DS07 DV01	17 /N 7010 /N	4822 130 83715	CHIP DIODE 1SS301 DAN202U	HZ21005000	QH07 }		4822 130 63928	CHIP TRS. 2SA1312(B)	HX113121B0
QC01	17 /F/S 18A		IC 74HC4053	HC705300Z0	QH12				
QC01	7010 /A/C/F /L/S/U		IC 74HC4053	HC705300Z0	QP01		4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
QC02	17 /F/S 18A		IC LA7213	HC10270030	QP02		4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
QC02	7010 /A/C/F /L/S/U		IC LA7213	HC10270030	QP03		4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
QC03	17 /F/S 18A	9965 000 07641	IC TK15420M	HC10035420	QP04		4822 130 10698	CHIP TRS. 2SA1586(Y GR) 2SA1576(Q R)	HX100012A0
QC03	7010 /A/C/F /L/S/U	9965 000 07641	IC TK15420M	HC10035420	QP05		4822 130 63496	SEMICON.COMP RN1311 DTC114TU	BA21311000
QC04	17 /F/S 18A	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210	▲ QP06	17 /F 18A /L/U		IC STR-G6651 SW.REGULATOR	HC10007080
QC04	7010 /A/C/F /L/S/U	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210	▲ QP06	7010 /F/L/U		IC STR-G6651 SW.REGULATOR	HC10007080
QC05	17 /F/S 18A	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0					

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
▲ QP06	17/S,N	9965 000 07636	IC STR-G6551 SW.REGULATOR	HC10008080	QV04		9965 000 07641	IC TK15420M	HC10035420
▲ QP06	18A	9965 000 07636	IC STR-G6551 SW.REGULATOR	HC10008080	QV05		9965 000 07641	IC TK15420M	HC10035420
QP06	/A/C,K/S				QV06	17/F,S 18A	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
	7010	9965 000 07636	IC, STR-G6551 POWER IC	HC10008080	QV06	7010 /A/C,F	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
	/A/C,N/S				QV07	/L,S,U	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
QP07	17/F	4822 130 10431	PHOTO UNIT COUPLER PC-123F2	HW10032320	QV08	17/F,S 18A	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
QP07	18A/L,U	4822 130 10431	PHOTO UNIT COUPLER PC-123F2	HW10032320	QV08	7010 /A/C,F	4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
▲ QP08		4822 130 10431	PHOTO UNIT COUPLER PC-123F2	HW10032320	QV09	/L,S,U	4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
QP09		9965 000 06384	IC TL431CZ	HC33036590	QV10		4822 130 10698	CHIP TRS. 2SA1586(Y GR) 2SA1576(Q R)	HX100012A0
QP10	17/F	4822 130 61906	SEMICON.COMP DTC114EU	BA20035210	QV11		4822 130 10698	CHIP TRS. 2SA1586(Y GR) 2SA1576(Q R)	HX100012A0
QP10	18A/L,U	4822 130 61906	SEMICON.COMP DTC114EU	BA20035210	QV12		4822 130 10698	CHIP TRS. 2SA1586(Y GR) 2SA1576(Q R)	HX100012A0
▲ QP11		9965 000 00399	IC SI-3033C +3.3V 1.5A WITH SW	HC36903080	QV13		4822 130 61906	SEMICON.COMP DTC114EU	BA20035210
▲ QP12		9965 000 07637	IC PQ2TZ15 +2.5V 1A WITH SW	HC98903320	QV14		4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
QP13		4822 130 62548	TRS. 2SB1185(E F)	HT211852B0	QV15		4822 130 61906	SEMICON.COMP DTC114EU	BA20035210
QP14		4822 130 61906	SEMICON.COMP DTC114EU	BA20035210	QV16		4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210
▲ QP15	17/N 7010/N	4822 209 80655	IC NJM78M08	HC38508090	QV17		4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
▲ QP16		9965 000 04991	IC SI-3050C +5.0V 1.5A WITH SW	HC10006080	QV18		4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0
QP17		4822 130 62548	TRS. 2SB1185(E F)	HT211852B0	QV50		9965 000 07642	IC TC74VHCT125AF	HC712505Q0
QP18		4822 130 10698	CHIP TRS. 2SA1586(Y GR) 2SA1576(Q R)	HX100012A0	QV51		9965 000 07643	IC TC74VHC125F	HC007605K0
QP22		4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210	PM01-MISCELLANEOUS				
QP23		4822 130 62548	TRS. 2SB1185(E F)	HT211852B0	FC01	17/F,S 18A	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020
QP24		4822 130 61906	SEMICON.COMP DTC114EU	BA20035210	FC01	7010 /A/C,F	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020
QS01		4822 130 61906	SEMICON.COMP DTC114EU	BA20035210	FC02	17/F,S 18A	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020
QS02		4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210	FC02	7010 /A/C,F	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020
QS03		4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0	FC03	17/F,S 18A	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020
QS04	17 18A	4822 130 42836	FET 2SK246(GR)	HF202461C0	FC03	7010 /A/C,F	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020
QS05	17 18A	4822 130 42836	FET 2SK246(GR)	HF202461C0	FC03	/L,S,U	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020
QS06		4822 130 11604	TRS. 2SB1020	HT21020100	FC03	7010 /A/C,F	9965 000 04998	EMI FILTER NFM41R01C221	FM31221020
QS07		4822 130 11605	TRS. 2SD1415	HT41415100	▲ FP02		4822 071 52501	FUSE T250MA/250V TR5 NO.19372	FS20025200
QS08		4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210	▲ FP03		4822 071 55001	FUSE T500MA/250V TR5 NO.19372	FS20050200
QS09		4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210	▲ FP04		4822 071 51602	FUSE T1.6A/250V TR5 NO.19372	FS20160200
QS11		5322 130 41844	FET 2SK170 V	HF201701H0	▲ FP05		4822 071 52501	FUSE T250MA/250V TR5 NO.19372	FS20025200
QS12		5322 130 41844	FET 2SK170 V	HF201701H0	▲ FP06		4822 071 52501	FUSE T250MA/250V TR5 NO.19372	FS20025200
QS13		4822 130 62649	FET 2SJ74 V	HF100741H0	▲ FP07		4822 071 51252	FUSE T1.25A/250V TR5 NO.19372	FS20125200
QS14		4822 130 62649	FET 2SJ74 V	HF100741H0	▲ FP08		4822 071 55001	FUSE T500MA/250V TR5 NO.19372	FS20050200
QS15					▲ FP09		4822 071 55001	FUSE T500MA/250V TR5 NO.19372	FS20050200
QS18		4822 130 63601	CHIP TRS. 2SC4213	HX342132A0	FS01		4822 157 10416	BLM11B102S	FN31010030
QS19		4822 209 71373	IC NJM78L05A	HC38105090	FS06			1608 EMIFILTER	
QS20		4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210					
QS21		4822 130 61903	SEMICON.COMP DTA114EUA	BA10026210					
QS52		4822 209 91012	IC 74HCT04AF	HC700405Q0					
QV01		4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0					
QV02		4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0					
QV03		4822 130 60669	CHIP TRS. 2SC4081(Q R) 2SC4116(Y GR)	HX300012A0					

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	PART NO. (MJI)
FV01 FV04		9965 000 04998	EMI FILTER NFM41R01C221	FM31221020	▲ TP02	7010 /A/C,N/S 18A/L/U	9965 000 07639	POWER TRANSF., SW. AC230V MAINS TRANSF. SW.	TS12918020 TS12918010
JC01	17 /F/S 18A		TERMINAL RCA JACK 3P YKC21-4010	YT02030580				PS01-POWER SWITCH CIRCUIT BOARD	
JC01	17 /F/S 18A		TERMINAL RCA JACK 3P YKC21-4010	YT02030580				PS01-MISCELLANEOUS	
JC01	7010 /A/C/F /L/S/U		TERMINAL RCA JACK 3P YKC21-4010	YT02030580	FE01	18A 7010		FERRITE CORE TFC-23-11-14 TFP2014-V	FC50150010
▲ JP05	17 18A		PLUG CONNECTOR 2P B3P-VH	YP04000760	▲ FP01	17 /F 18A/L/U		FUSE 1.25A 125V UL CSA MINI FBT	FS10125350
JP06	18A		JACK 1MM PITCH FFC 30 FMN-BTK(ST)	YJ07022240	▲ FP01	7010 /F/L/U		FUSE 1.25A 125V UL CSA MINI FBT	FS10125350
JP07	18A		JACK 1MM PITCH FFC 16 FMN-BTK(ST)	YJ07022220	▲ FP01	17 /S,N	4822 070 31252	FUSE 1.25A 250V BS LISTED	FS10125850
JP08	7010		GND TERMINAL FOR PCB	YL01010240	▲ FP01	18A /A/C,K/S	4822 070 31252	FUSE 1.25A 250V BS LISTED	FS10125850
JS01		4822 290 81723	TERMINAL RCA JACK 4P WHITE/RED	YT02041070	▲ FP01	7010 /A/C,N/S	4822 070 31252	FUSE 1.25A 250V BS LISTED	FS10125850
JS02		4822 290 81638	TERMINAL RCA JACK 1P BLACK	YT02010790	▲ JP01	17 /N 7010 /S,U		PLUG CONNECTOR 2P B3P-VH	YP04000760
JS03		4822 130 10845	OPT. CONNECTOR GP1F32T OUTPUT	YJ15000090	▲ JP02		9965 000 04864	JACK CLIP FOR 20MM FUSE ON PCB	YJ08000580
JS04		4822 267 41009	TERMINAL RCA JACK 2P BLACK	YT02020890	▲ JP03		9965 000 04865	JACK CLIP FOR 20MM FUSE ON PCB	YJ08000590
JS07	7010		M1698 PWB GND TERMINAL WITH M3	YL01010140	▲ JP04			PLUG CONNECTOR 2P B3P-VH	YP04000760
JV01	17 18A		JACK 1MM PITCH FFC 30 FMN-BTK(ST)	YJ07022240	▲ JP10	18A /S		TERMINAL FOR AC COAD ON PCB	YL01010250
JV03		9965 000 05008	TERMINAL RCA JACK 2P YELLOW	YT02021590	▲ SP01		4822 276 13364	PUSH SWITCH SDDL1 MAINS TV-3	SP01011990
JV04		4822 265 10678	TERMINAL S-VIDEO JACK 1P	YT02011010				PV01-SYSTEM SWITCH CIRCUIT BOARD	
JV06	18A		JACK 07FMN-BTK	YJ07022210				PV01-CAPACITORS	
JV08	7010		M1698 PWB GND TERMINAL WITH M3	YL01010140				CER. 18pF ±5% 50V	DD95180300
▲ LP02		4822 157 70398	CHOKE COIL LF-4D-223 22μH 0.4A	LC22260130	CV21	7010 /A/C/F/L/S		CER. 47pF ±5% 50V	DD95470300
LP03	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J	LC11533900	CV22	7010 /A/C/F/L/S	4822 122 33777	CER. 5pF ±0.25pF 50V	DD90050300
LP04	17 /N 7010 /N	4822 157 60445	CHOKE COIL 15μH J	LC11533900	CV34	7010 /A/C/F/L/S	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300
LP05		9965 000 07635	CHOKE COIL 22μH 1.29A	LC22230060	CV36	7010 /A/C/F/L/S	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300
LS01		4822 142 60422	PULSE TRANSF.	TP41042030	CV47	7010 /A/C/F/L/S	9965 000 04997	CER. 5pF ±0.25pF 50V	DD90050300
LS02		9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900				PV01-RESISTORS CHIP	
LS03		9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	RV84	17 /S,N	4822 051 30472	4.7k Ω ±5% 1/16W	NN05472610
LV01		4822 157 60445	CHOKE COIL 15μH J	LC11533900	RV84	18A /A/C,K/S,L	4822 051 30472	4.7k Ω ±5% 1/16W	NN05472610
LV02		4822 157 60445	CHOKE COIL 15μH J	LC11533900	RV84	7010 /A/C,L,N	4822 051 30472	4.7k Ω ±5% 1/16W	NN05472610
LV03		4822 157 60445	CHOKE COIL 15μH J	LC11533900				PV01-MISCELLANEOUS	
LV04		9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	JV09	18A		JACK S5B-PH-K-S	YJ06006450
LV05		4822 157 60445	CHOKE COIL 15μH J	LC11533900					
LV06		9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	SV01		4822 277 11818	SLIDE SWITCH SSSB02	SS02021440
LV07		4822 157 60445	CHOKE COIL 15μH J	LC11533900	SV02	17 /F/S 18A	4822 277 11818	SLIDE SWITCH SSSB02	SS02021440
LV08		9965 000 00458	CHOKE COIL 8.2μH EL0405	LC18223900	SV02	7010 /A/C/F /L/S,U	4822 277 11818	SLIDE SWITCH SSSB02	SS02021440
LV09		4822 157 60445	CHOKE COIL 15μH J	LC11533900	SV03	17 /S,N	9965 000 07644	SLIDE SWITCH SSSB023-P06S	SS02030790
▲ TP01	17 /F 7010 /F		MAINS TRANSF. AC100V	TS14156020	SV03	18A /A/C,K/S,L	9965 000 07644	SLIDE SWITCH SSSB023-P06S	SS02030790
▲ TP01	17 /S,N	9965 000 07638	MAINS TRANSF. AC230V	TS14156030	SV03	7010 /A/C/F /L/S,U	9965 000 07644	SLIDE SWITCH SSSB023-P06	SS02030790
▲ TP01	18A /A/C,K/S 7010	9965 000 07638	MAINS TRANSF. AC230V	TS14156030					
▲ TP01	/A/C,N/S 18A/L/U 7010 /L,U	9965 000 07638	POWER TRANSF. AC230V	TS14156030					
▲ TP01	17 /F		MAINS TRANSF. SW. AC100V	TS12918010					
▲ TP02	7010 /F/L,U		MAINS TRANSF. SW. AC230V	TS12918020					
▲ TP02	17 /S,N	9965 000 07639	MAINS TRANSF. SW. AC230V	TS12918020					
▲ TP02	18A /A/C,K/S	9965 000 07639	MAINS TRANSF. SW. AC230V	TS12918020					

Service Manual

DB-VLD210

DVD Loader for MARANTZ

DVD Player : DV7010

DV7100

DV-18mkII

DV-17

EC1000

ER3000

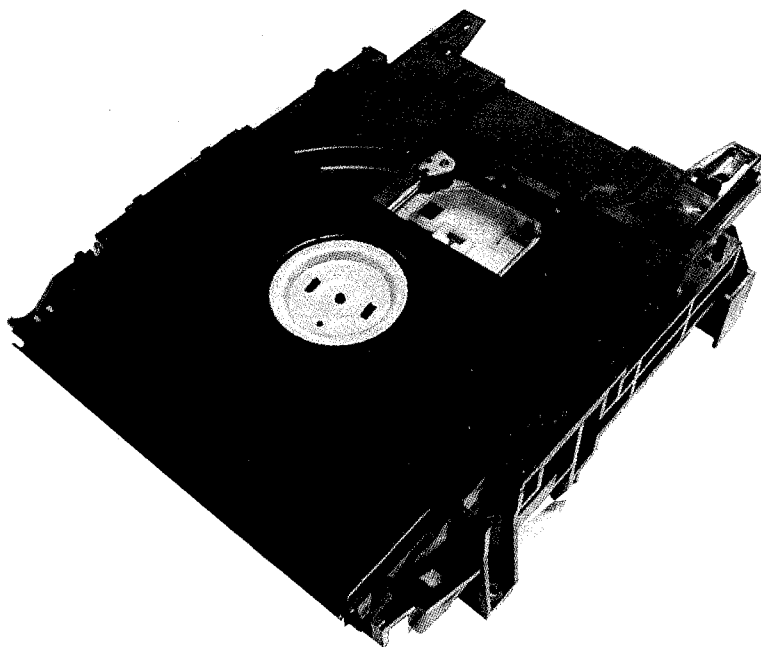


TABLE OF CONTENTS


SECTION	PAGE
2.DB-VLD 210 (DVD Loader for MARANTZ)	
2.1 EXTERIOR	2-1
2.2 LOADING MECHANISM ASSY	2-2
2.3 TRAVERSE MECHANISM ASSYS	2-3

Please use this service manual with referring to the user guide (D.F.U) without fail.
修理の際は、必ず取り扱い説明書を準備し操作方法を確認の上作業を行ってください。

marantz®

DB-VLD210



2.1 EXTERIOR

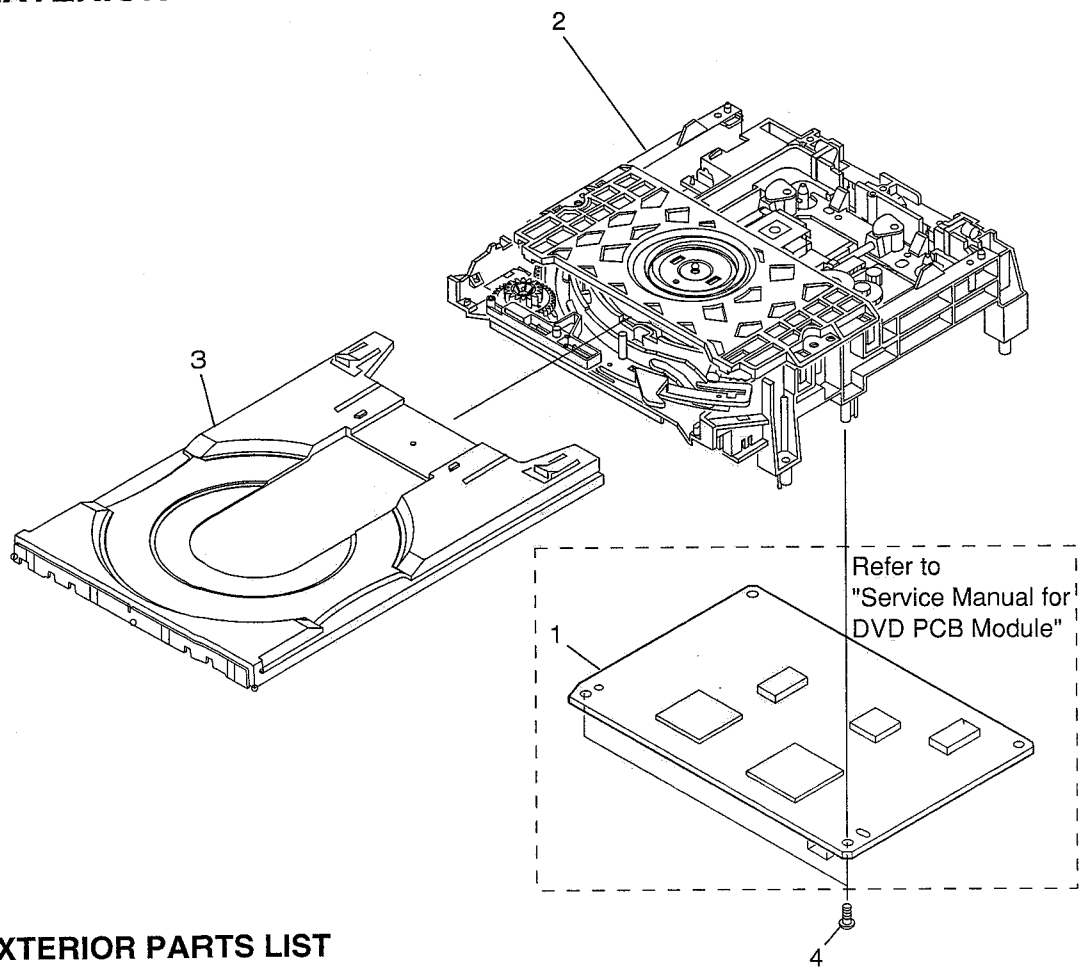


(1) EXTERIOR PARTS LIST

Mark	No.	Part No. (for PCS)	Description	Part No. (for MJI)
	1	—	VWS1446, DVDM Assy DB-VPB210	ZK402K0210
	1	—	VWS1449, DVDM Assy DB-VPB211	ZK324J0210
	1	9965 000 07628	VWS1447, DVDM Assy DB-VPB212	ZK402K0230
	1	—	VWS1448, DVDM Assy DB-VPB213	ZK402K0220
	1	—	VWS1450, DVDM Assy DB-VPB214	ZK324J0220
	1	—	VWS1451, DVDM Assy DB-VPB215	ZK408K0210
NSP	2	—	VWT1174, Loader Assy	—
	3	9965 000 07934	VNL1858, Tray	402K163210
NSP	4	—	PPZ30P080FMC, Screw	—

● DISASSEMBLY OF TRAVERSE MECHANISM ASSY

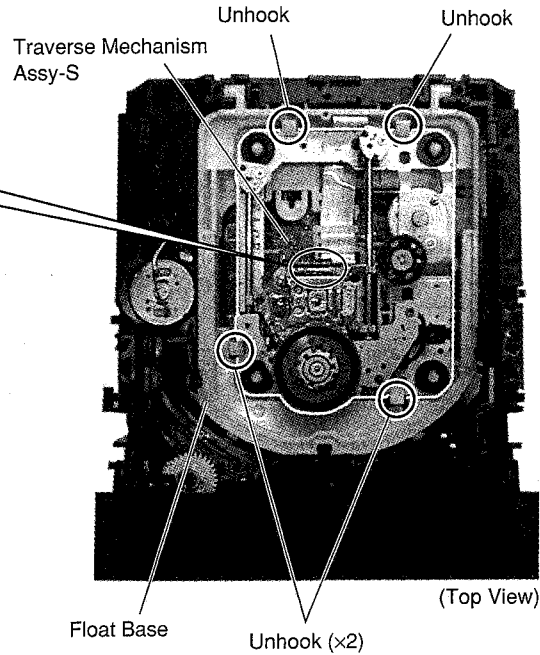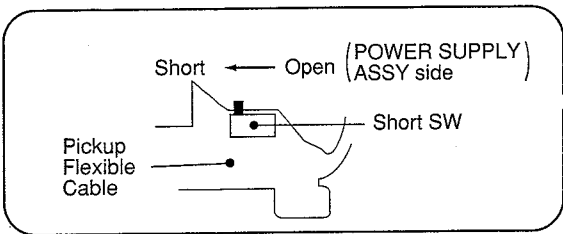

2.2 LOADING MECHANISM ASSY

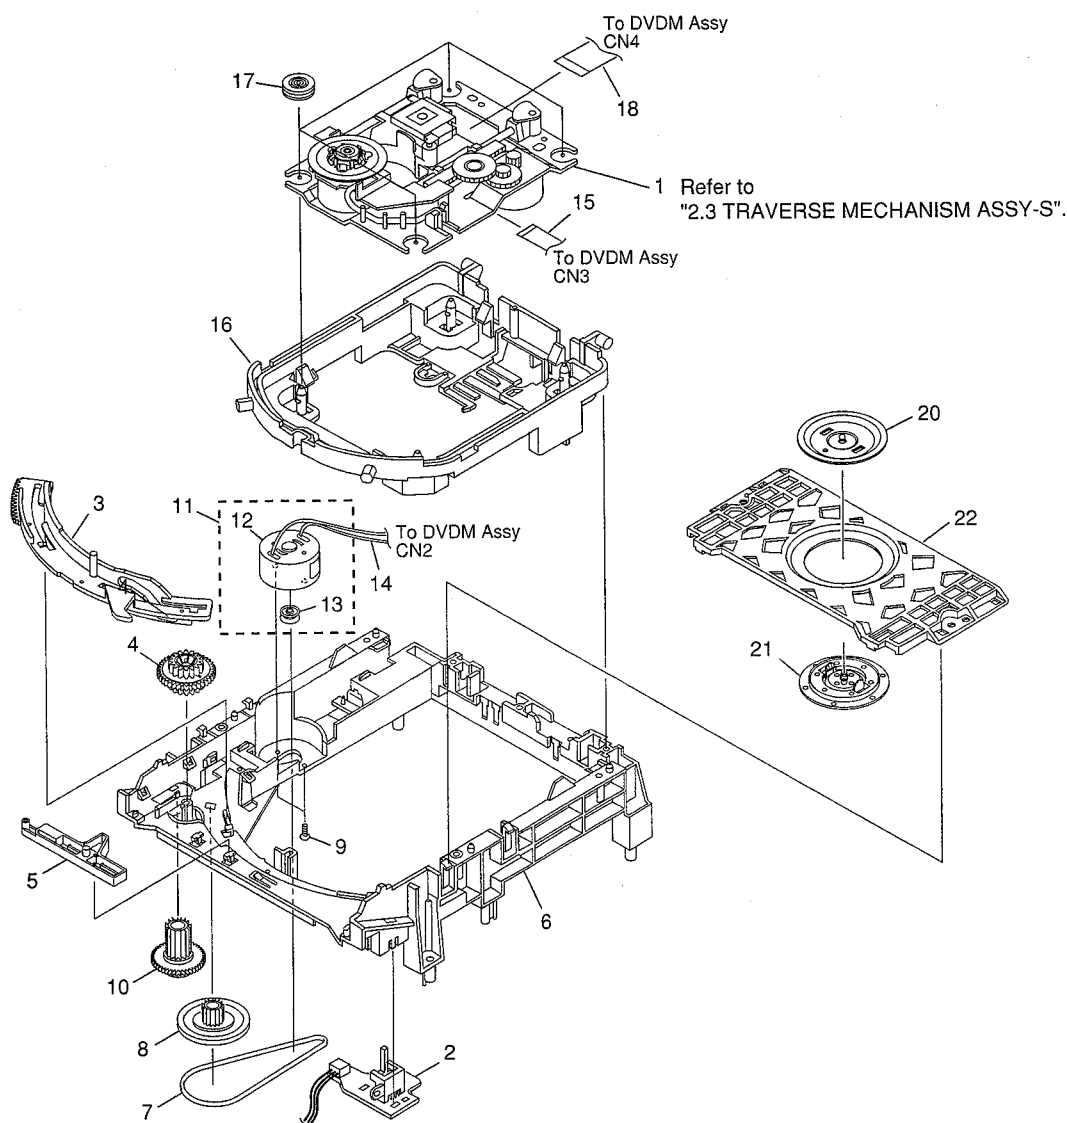


● LOADING MECHANISM ASSY PARTS LIST

Mark	No.	Part No. (for PCS)	Description	Part No. (for MJI)
NSP	1	9965 000 07935	VXX2653, Traverse Mechanism Assy-S	*ZK000310R
	2	—	VWG2171, LOAB Assy	—
	3	9965 000 07936	VNL1862, Drive Cam	402K054210
	4	9965 000 07937	VNL1861, Drive Gear	402K058210
NSP	5	9965 000 07938	VNL1820, Lock Plate	402K104210
	6	—	PNW2968, Loading Bases	—
	7	9965 000 07939	VEB1315, Belt	402K264210
NSP	8	9965 000 07940	VNL1866, Gear Pulley	402K262210
	9	—	JGZ17P028FMC, Screw	—
	10	9965 000 07941	VNL1860, Loading Gear	402K058220
	11	9965 000 07942	VXX2505, Loading Motor Assy	*ZZ001600R

Mark	No.	Part No. (for PCS)	Description	Part No. (for MJI)
NSP	12	—	PXM1027, DC Motor / 0.3W (LOADING)	—
NSP	13	—	PNW1634, Motor Pulley	296W262010
	14	—	VKP2253, Connector Assy	—
	15	9965 000 07943	VDA1842, Flexible Cable (08P)	*YU000790R
	16	9965 000 07944	VNL1865, Float Base	402K105210
	17	9965 000 07945	VEB1286, Floating Rubber	402K056210
	18	9965 000 07946	VDA1843, Flexible Cable (24P)	*YU000800R
	20	9965 000 07947	VNE2162, Clamper Plate	402K104220
	21	9965 000 07948	VNL1738, Clamper	402K005210
	22	9965 000 07949	VNL1859, Bridge	402K104230

2.3 TRAVERSE MECHANISM ASSY-S

• Top View

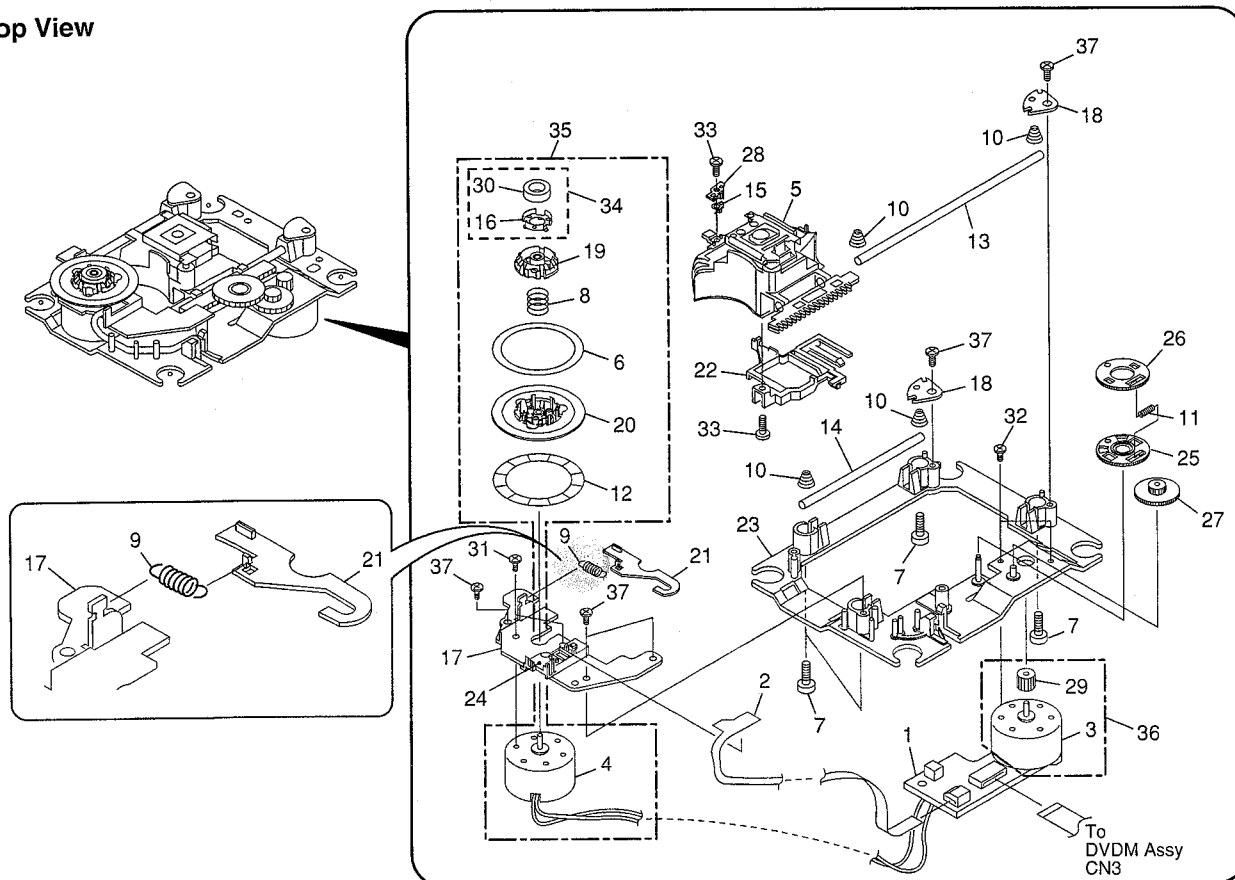

● TRAVERSE MECHANISM ASSY-S PARTS LIST


Mark	No.	Part No. (for PCS)	Description	Part No. (for MJ)
NSP	1	—	VWG2048, SMEB Assy	—
NSP	2	—	VWG2009, FGSB Assy	—
NSP	3	—	VXM1079, Motor	—
NSP	4	—	VXM1084, Motor	—
△NSP	5	—	VWY1055, Pickup Assy	—
NSP	6	—	DEC2040, Table Sheet	—
NSP	7	—	VBA1058, Screw	—
NSP	8	—	VBH1278, Centering Spring	—
	9	9965 000 07950	VBH1317, Hook Spring	296W115050
	10	9965 000 07951	VBH1303, Skew Spring	296W115060
	11	9965 000 07952	VBH1308, Gear Spring	296W115070
NSP	12	—	VEC1959, Reflected Sheet	—
NSP	13	—	VLL1504, Guide Bar	—
NSP	14	—	VLL1505, Sub-guide Bar	—
	15	9965 000 07953	VNC1017, Hold Spring	296W115080
NSP	16	—	VNE2070, Magnet Holder	—
NSP	17	—	VNE2154, Motor Base	—
NSP	18	—	VNE2155, Cover	—
NSP	19	—	VNL1746, Centering Ring	—

Mark	No.	Part No. (for PCS)	Description	Part No. (for MJ)
NSP	20	—	VNL1747, Disc Table	—
	21	9965 000 07954	VNL1770, Hook	296W258010
NSP	22	—	VNL1802, FFC Holder	—
NSP	23	—	VNL1806, Mechanism Base	—
NSP	24	—	VNL1807, FG Holder	—
	25	9965 000 07955	VNL1808, Gear A	296W058090
	26	9965 000 07956	VNL1809, Gear B	296W058100
	27	9965 000 07957	VNL1810, Gear C	296W058110
	28	9965 000 07958	VNL1811, Slider	296W125010
NSP	29	—	VNL1814, Gear D	—
NSP	30	—	VYM1024, Magnet	—
NSP	31	—	JFZ17P025FZK, Screw	—
NSP	32	—	JGZ17P028FMC, Screw	—
NSP	33	—	VBA1051, Screw	—
NSP	34	—	VXX2507, Magnet Holder Assy	—
	35	9965 000 07959	VXX2649, Spindle Motor Assy	*ZK000290R
	36	9965 000 07960	VXX2650, Carriage Motor Assy	*ZK000300R
NSP	37	—	PBA1069, Screw	—

Service Manual

DB-VPB210, DB-VPB211, DB-VPB212, DB-VPB213, DB-VPB214 DVD PCB Module for MARANTZ

DVD Player : DV7010
DV-18mkII
DV-17
EC1000
ER3000

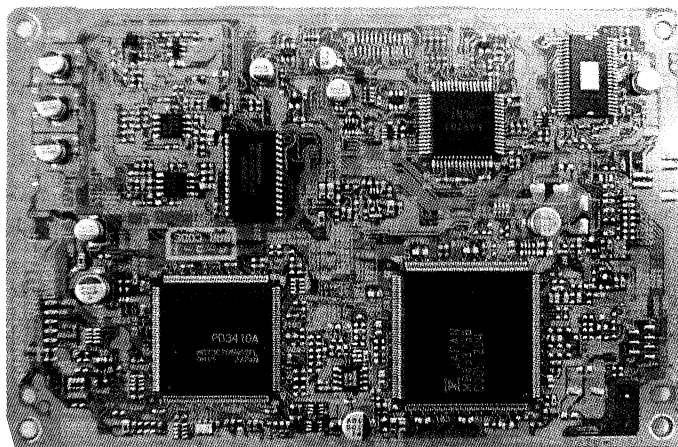

The DVD module is different with each product and version.
Refer to the following table.

Model	Vers.		
	/U, /F, /A	/K, /L, /S, /C	/N
DV7010	DB-VPB210	DB-VPB213	DB-VPB212
DV-18mkII	DB-VPB210	DB-VPB213	
DV-17	DB-VPB210	DB-VPB213	DB-VPB212

Model	Vers.		
	/F, /A, /S, /C	/K, /L	/N
EC1000	DB-VPB211	DB-VPB214	
ER3000	DB-VPB211	DB-VPB214	(DB-VPB217)

TABLE OF CONTENTS

SECTION	PAGE
3. DB-VPB210 / 211 / 212 / 213 / 214 (DVD PCB Module for MARANTZ)	
3.1 BLOCK DIAGRAM AND SCHEMATIC DIAGRAM	3-1
3.2 PCB CONNECTION DIAGRAM	3-10
3.3 PCB PARTS LIST	3-24


Please use this service manual with referring to the user guide (D.F.U) without fail.
修理の際は、必ず取り扱い説明書を準備し操作方法を確認の上作業を行ってください。

marantz®


DB-VPB210/211/212/213/214

3.1 BLOCK DIAGRAM AND SCHEMATIC DIAGRAM

3.1.1 BLOCK DIAGRAM

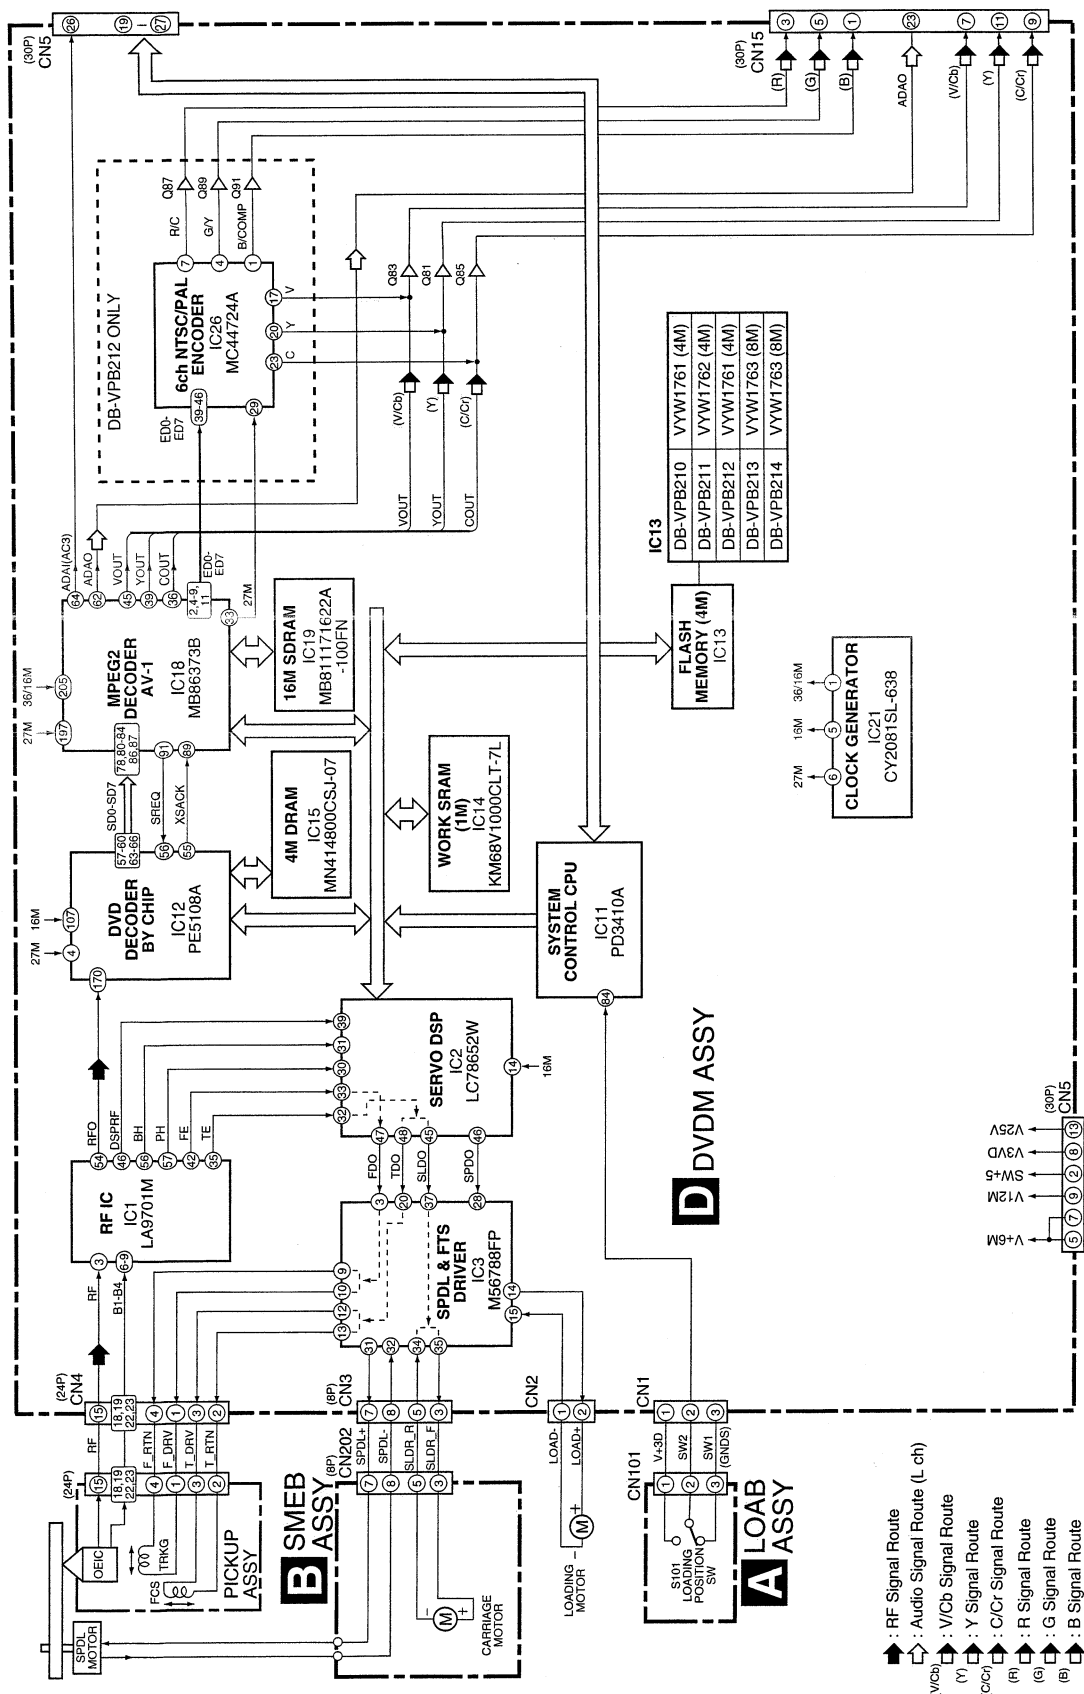


3.1.2 LOAB, SMEB, FGSB ASSYS and OVERALL WIRING DIAGRAM

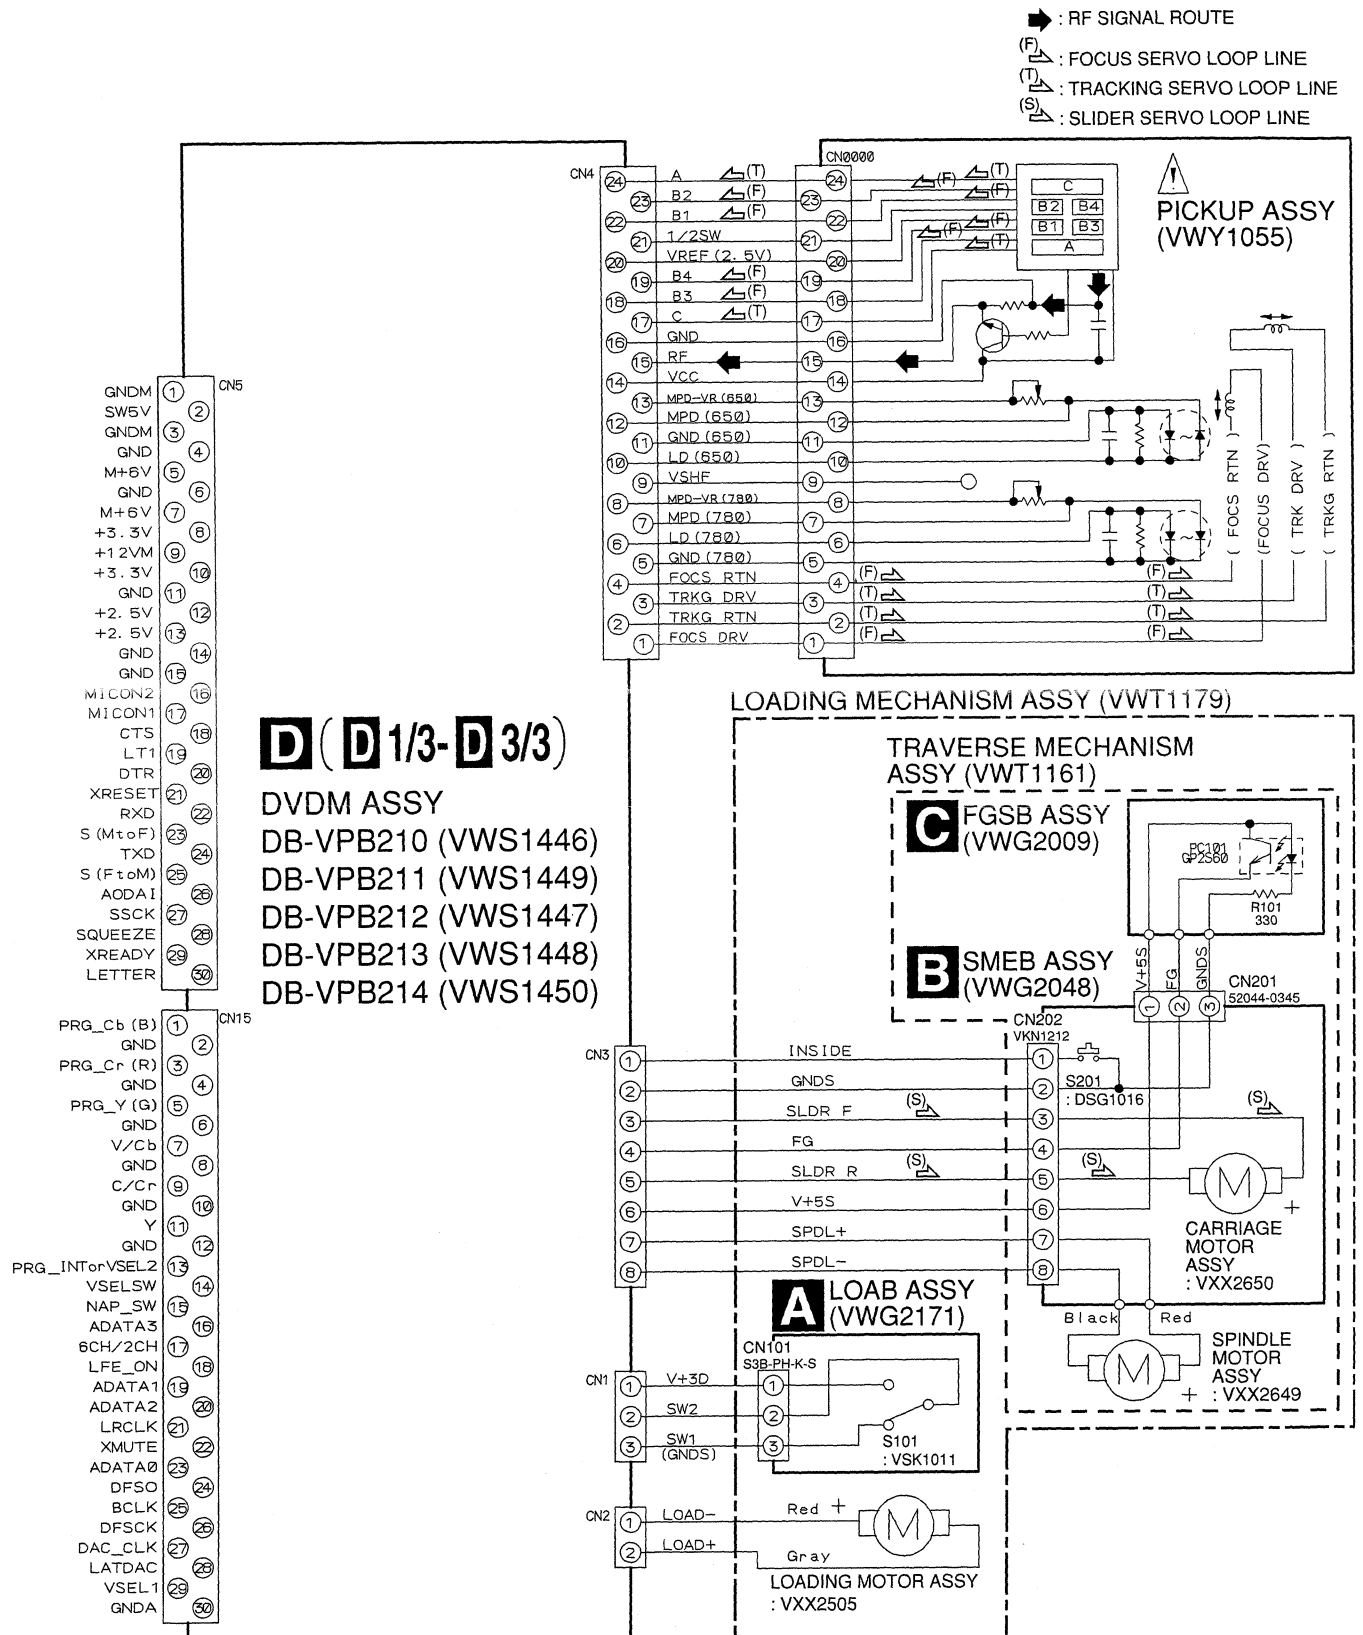


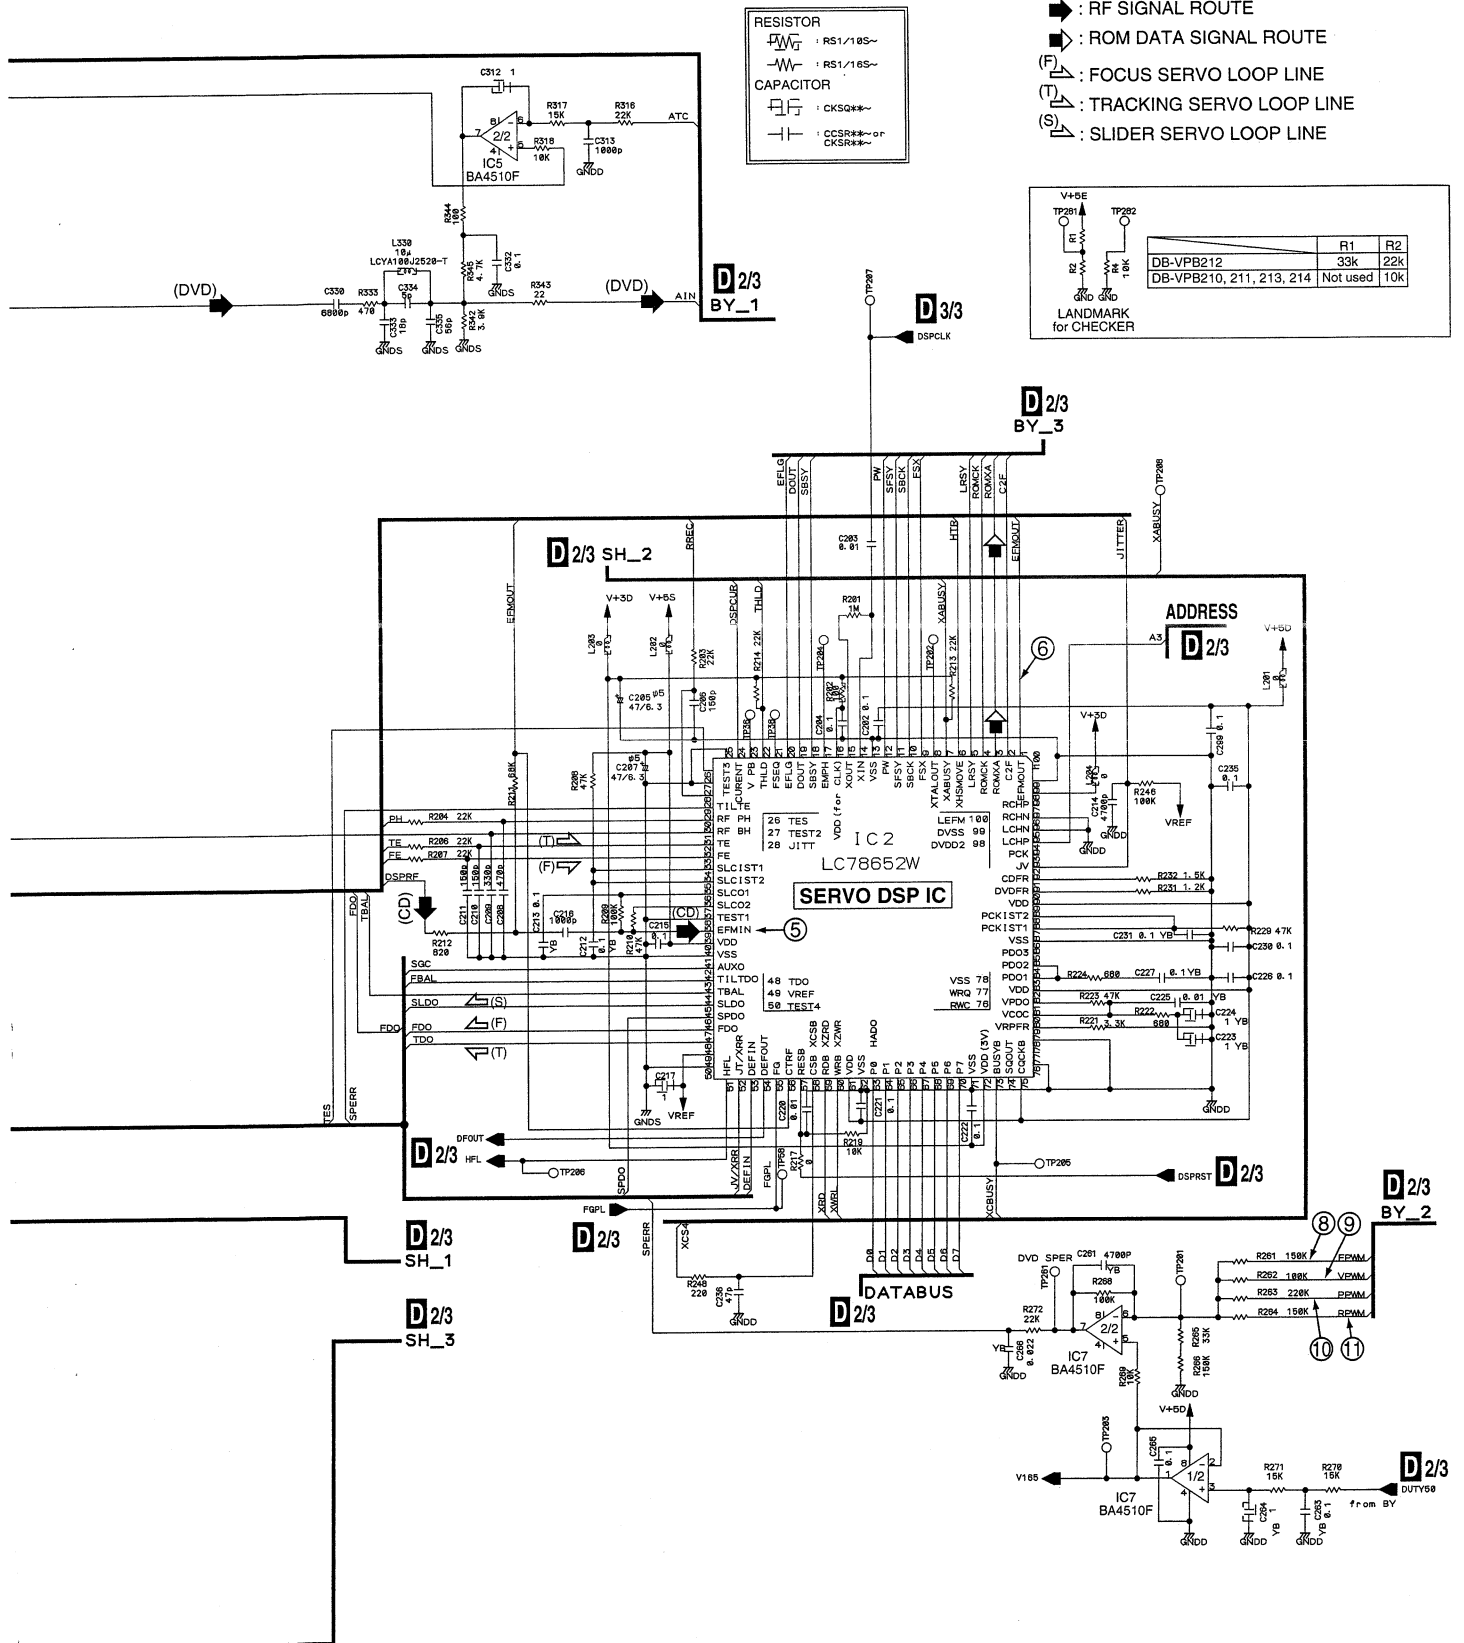
3.1.3 DVDM ASSY (1/3)

D 1/3 DVDM ASSY

(VWS1446, VWS1449, VWS1447,
VWS1448 VWS1450)

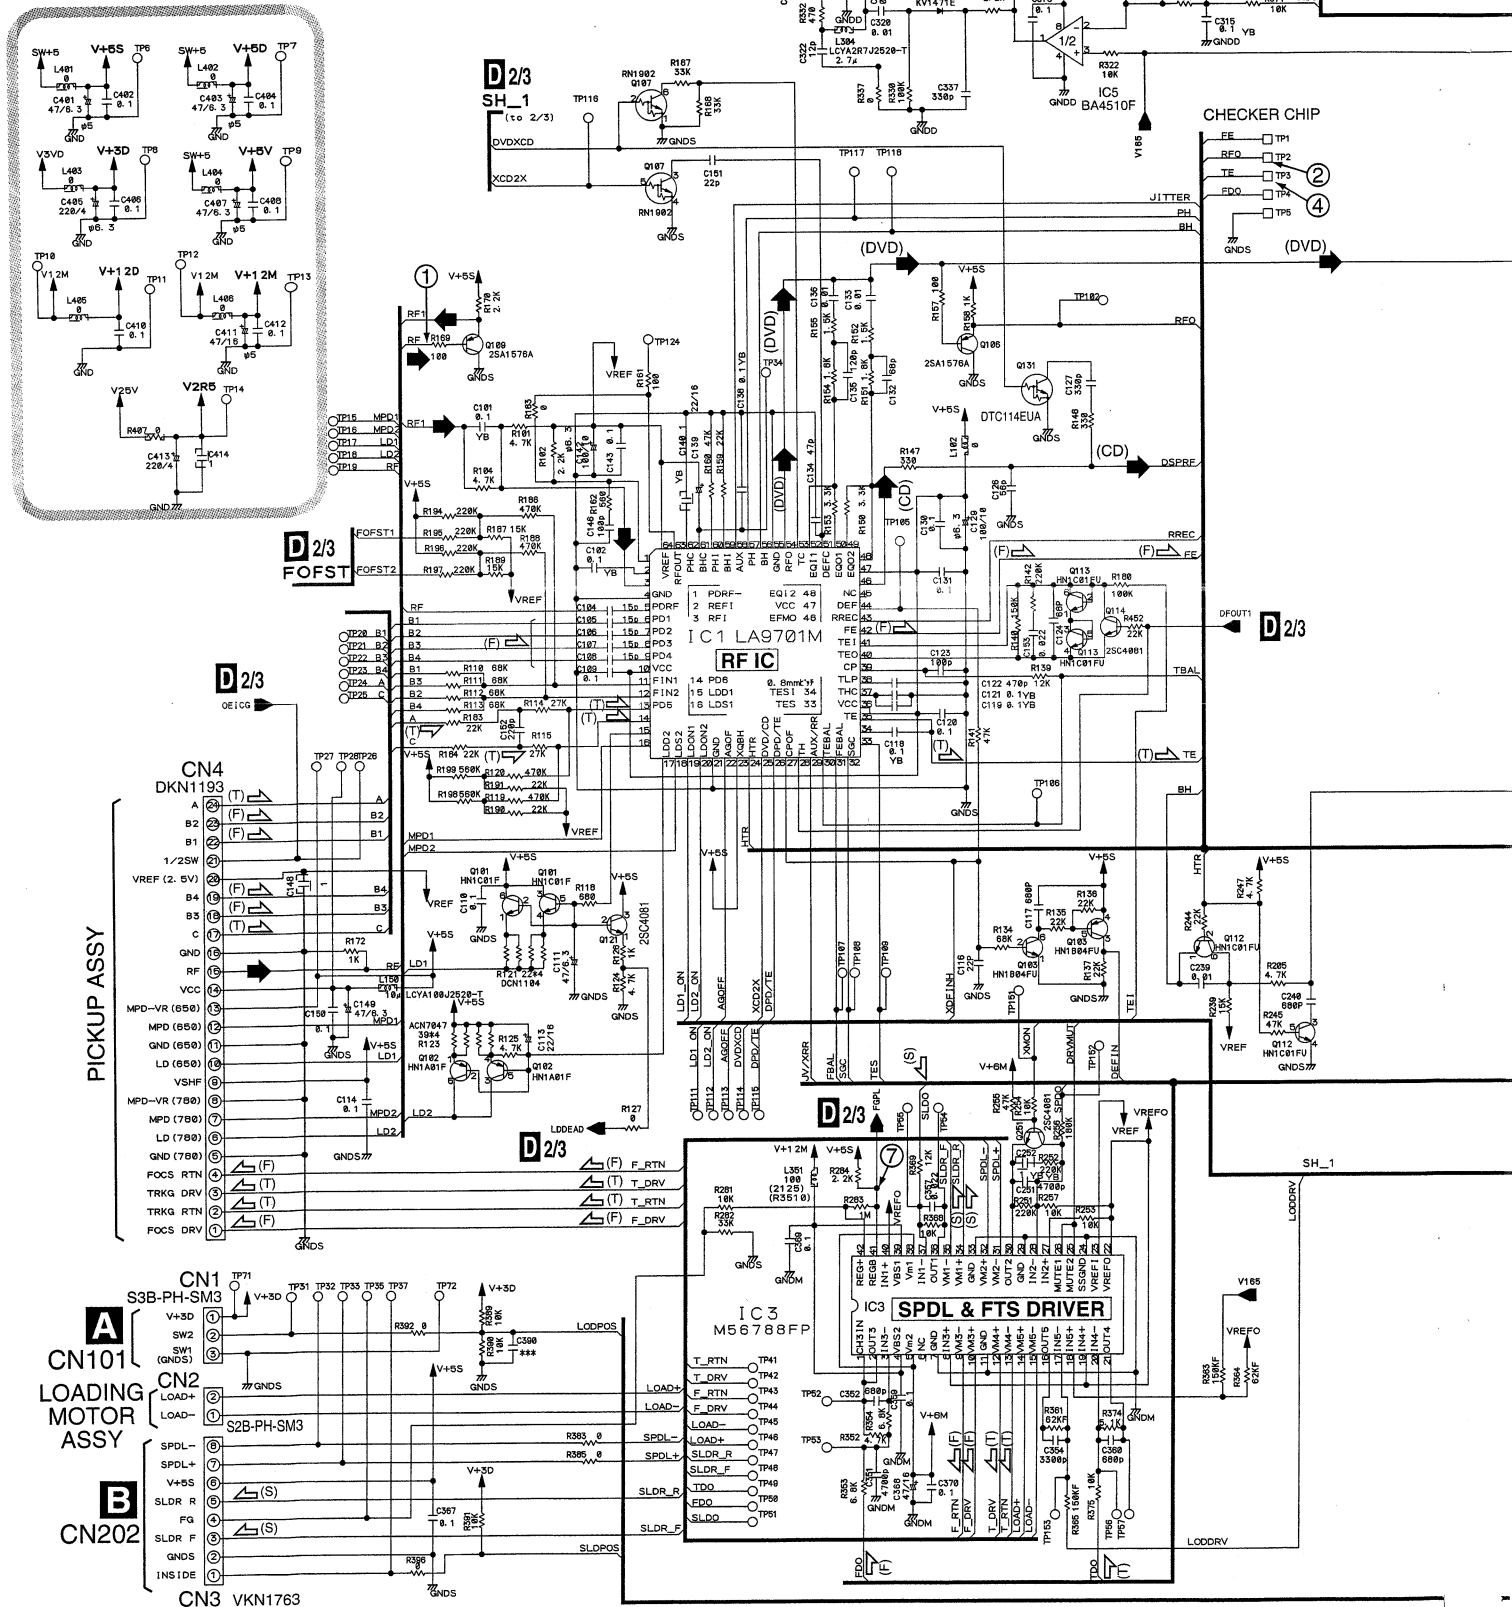

 : The power supply is shown with the marked box.



D 2/3 DVDM ASSY (VWS1446, VWS1449, VWS1447, VWS1448, VWS1450)




➡ : RF SIGNAL ROUTE
 ➡ : ROM DATA SIGNAL ROUTE
 ➡ : AUDIO SIGNAL ROUTE





D 3/3 DVDM ASSY (VWS1446,VWS1449, VMS1447, VWS1448,VWS1450)



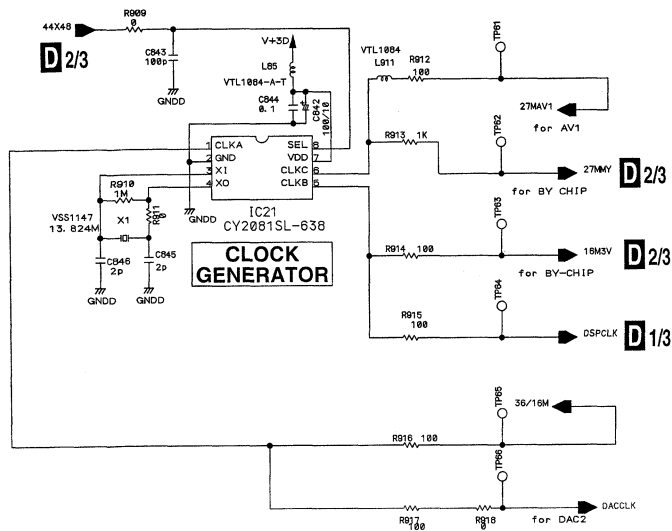


- : AUDIO SIGNAL ROUTE
- : ROM DATA SIGNAL ROUTE
- ▢ : V/CB SIGNAL ROUTE
- (Y) : Y SIGNAL ROUTE
- (C) : C SIGNAL ROUTE
- (R) : R SIGNAL ROUTE
- (G) : G SIGNAL ROUTE
- (B) : B SIGNAL ROUTE

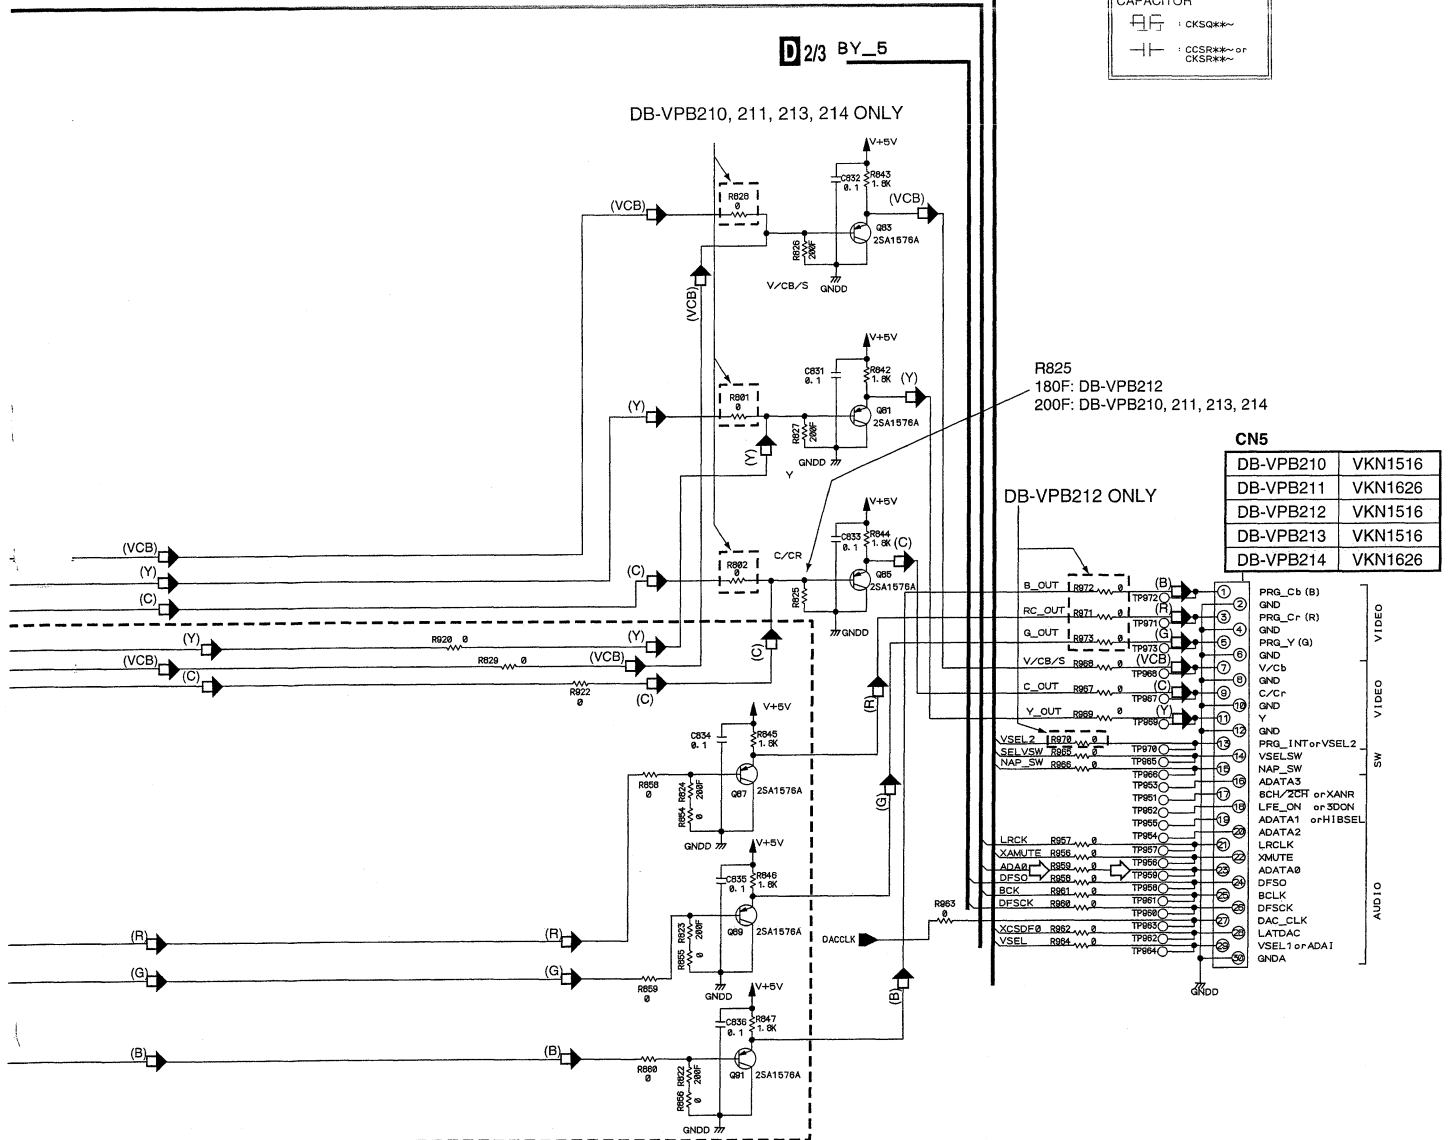

WAVEFORMS

Note : The encircled numbers denote measuring point in the schematic diagram.

Measurement condition : No. 1 to 4 and 6 to 11 : MJK1, Title 1-chp 1 or TDV-540, Title 2-chp1
 No. 5 : CD, ABEX-784 Track 1 or PHILIPS SBC 429 Track1
 No. 12 to 14 : MJK1, Title 1-chp 4 or TDV-540, Title 2-chp1
 No. 15 to 17 : MJK1, Title 1-chp 5 or TDV-540, Title 2-chp1

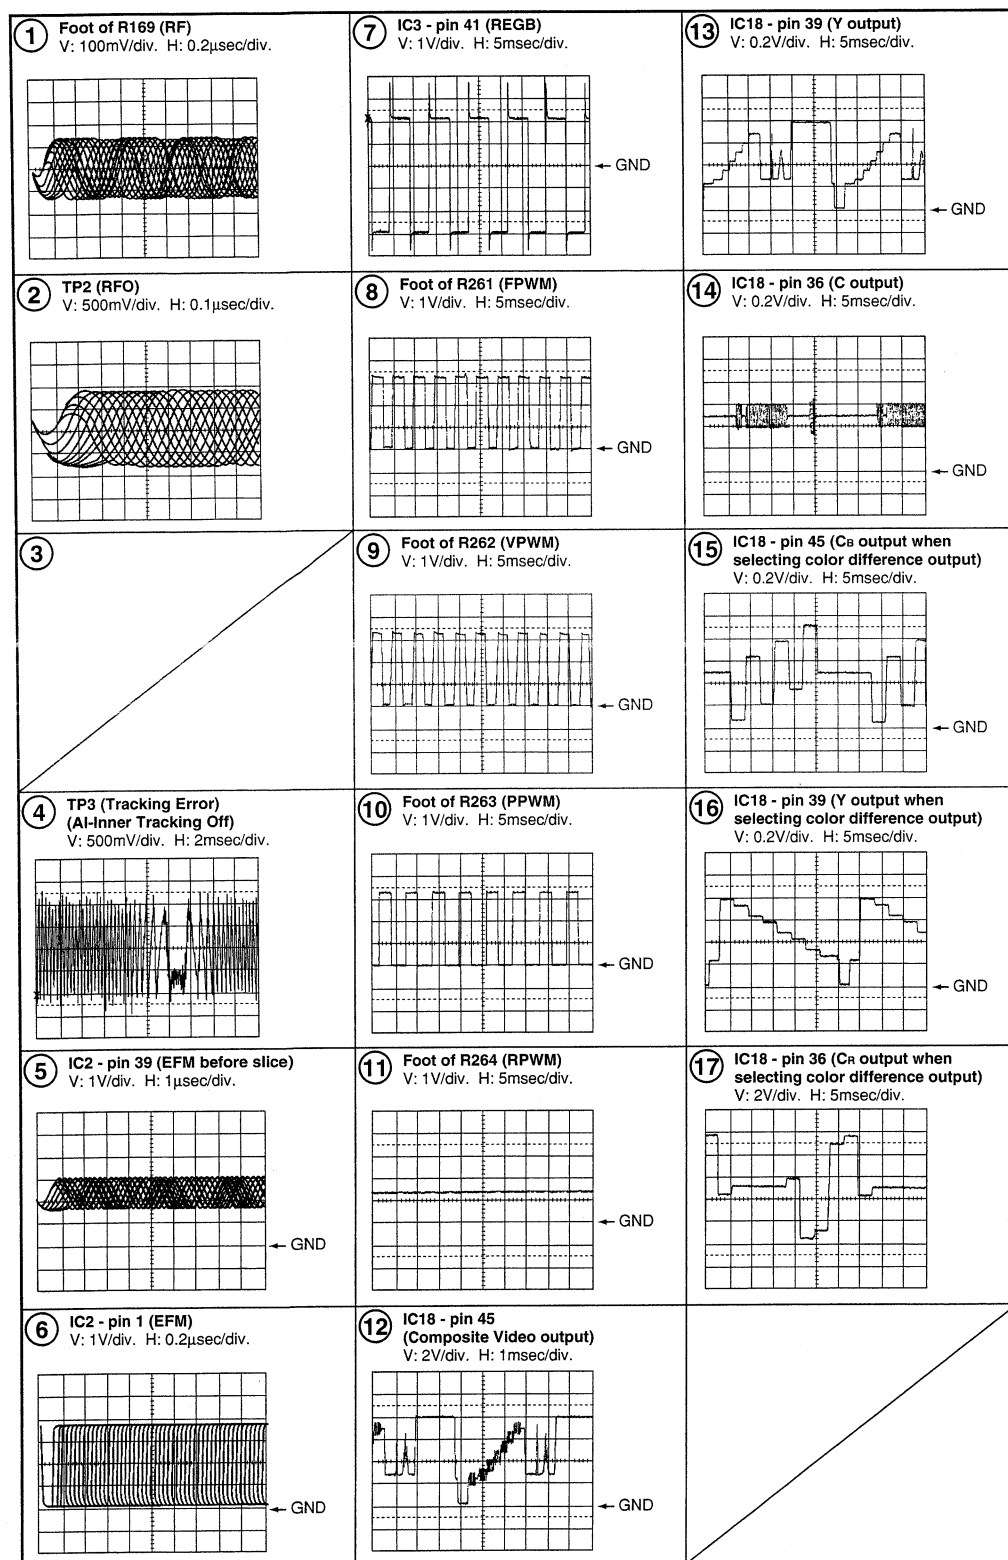


3.2 PCB CONNECTION DIAGRAM

NOTE FOR PCB DIAGRAMS :




1. Part numbers in PCB diagrams match those in the schematic diagrams.
2. A comparison between the main parts of PCB and schematic diagrams is shown below.

Symbol In PCB Diagrams	Symbol In Schematic Diagrams	Part Name
		Transistor
		Transistor with resistor
		Field effect transistor
		Resistor array
		3-terminal regulator

3. The parts mounted on this PCB include all necessary parts for several destinations.
- For further information for respective destinations, be sure to check with the schematic diagram.
4. View point of PCB diagrams.

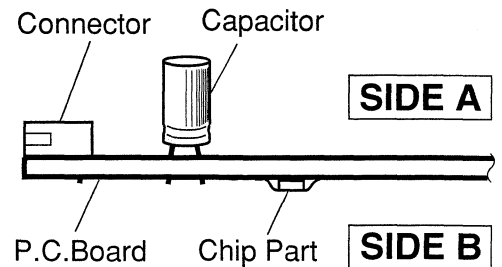

3.2.1 LOAB and SMEB ASSYS

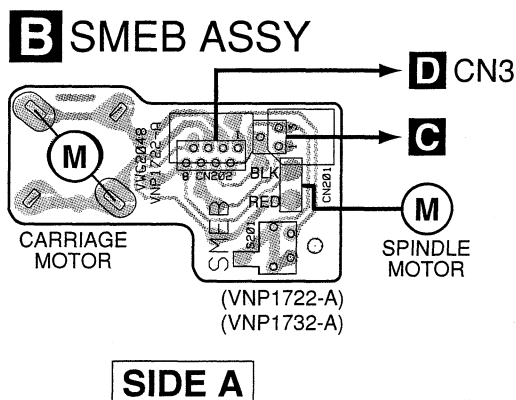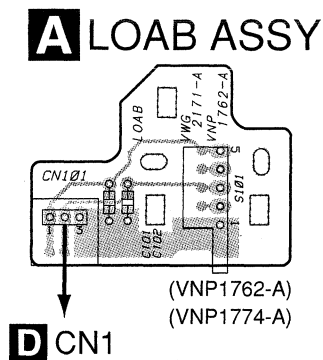


SIDE B

3.2.2 DVDM ASSY

D DVDM ASSY

• This PCB is a four-layered board.

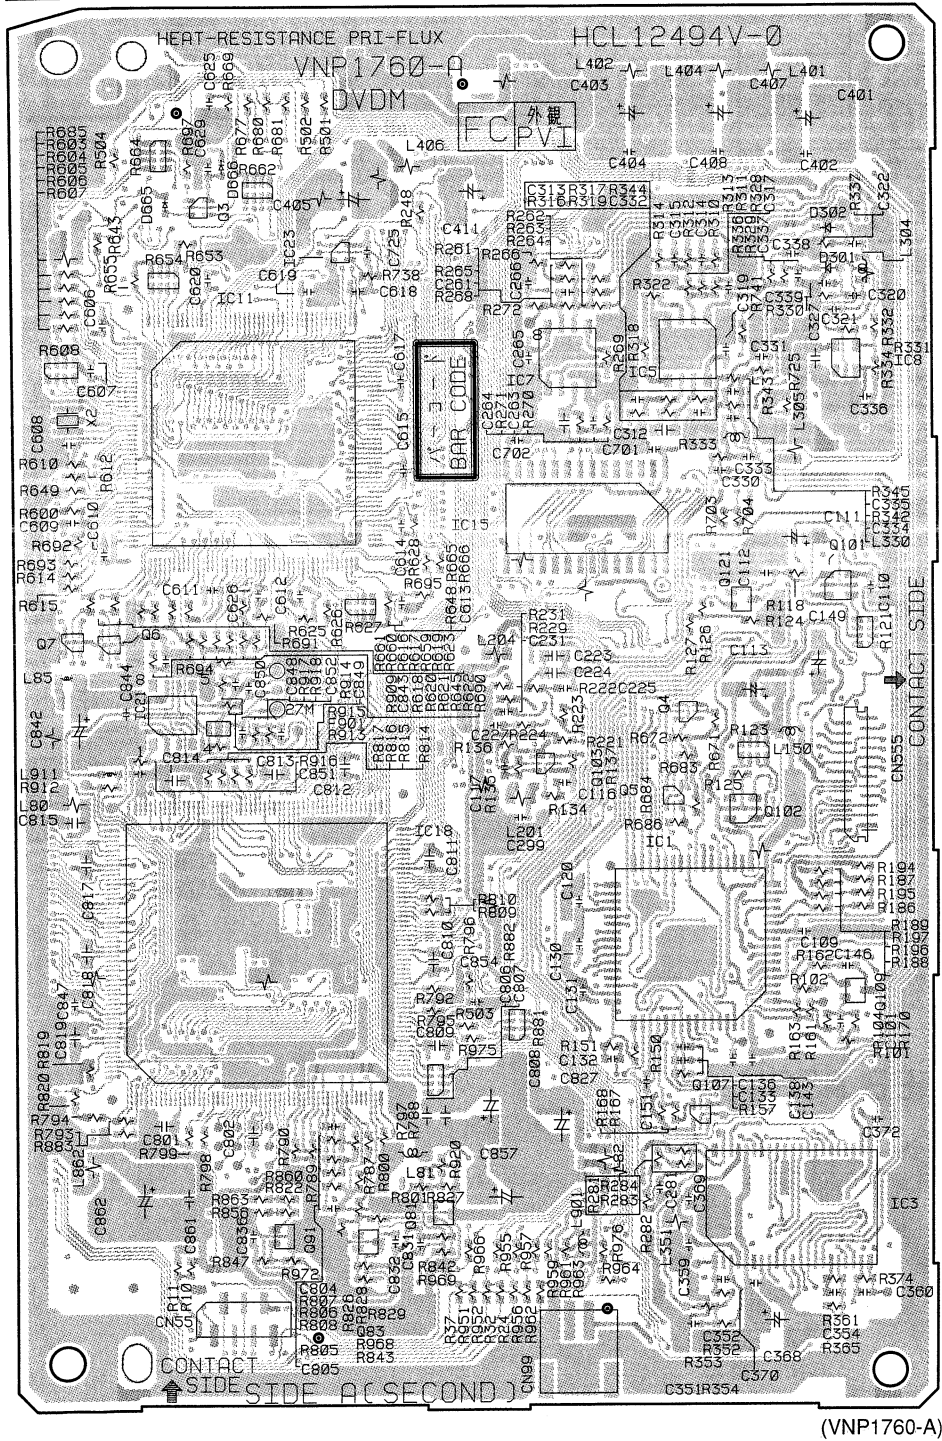

- Q3
- IC7 IC5 IC8
- IC11
- IC15
- Q121 Q101
- Q7 Q6
- IC21 Q4
- Q103
- Q5 Q102
- IC18 IC1
- Q109
- Q107
- Q81 IC3
- Q91 Q83

SIDE A


D DVDM ASSY

• This PCB is a four-layer board.

LOADING
MOTOR
ASSY

PICKUP
ASSY

B
CN202

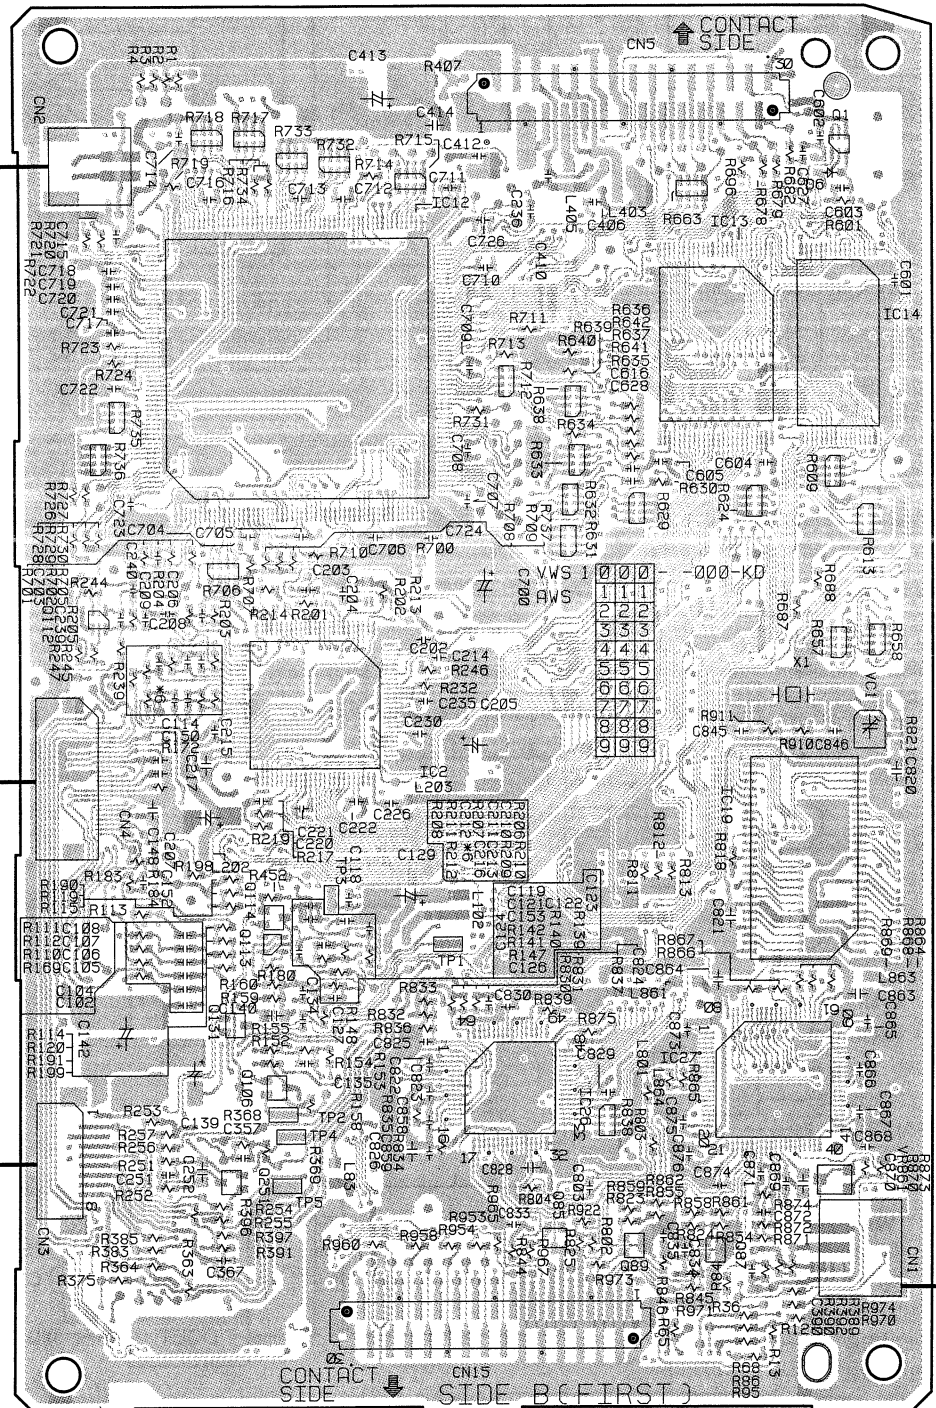

Q1

IC13 IC14

IC12

Q112

IC2

IC19

Q114

Q113

Q131

Q106 IC26 IC27

Q251

Q85 Q89 Q87

(VNP1760-A)

A CN101

SIDE B

3.2.3 IC

• The information shown in the list is basic information and may not correspond exactly to that shown in the schematic diagrams.


• List of IC

LC78652W, PD3410A, MB86373B

■ LC78652W (DVDM ASSY : IC2)

• DSP IC

• Block Diagram

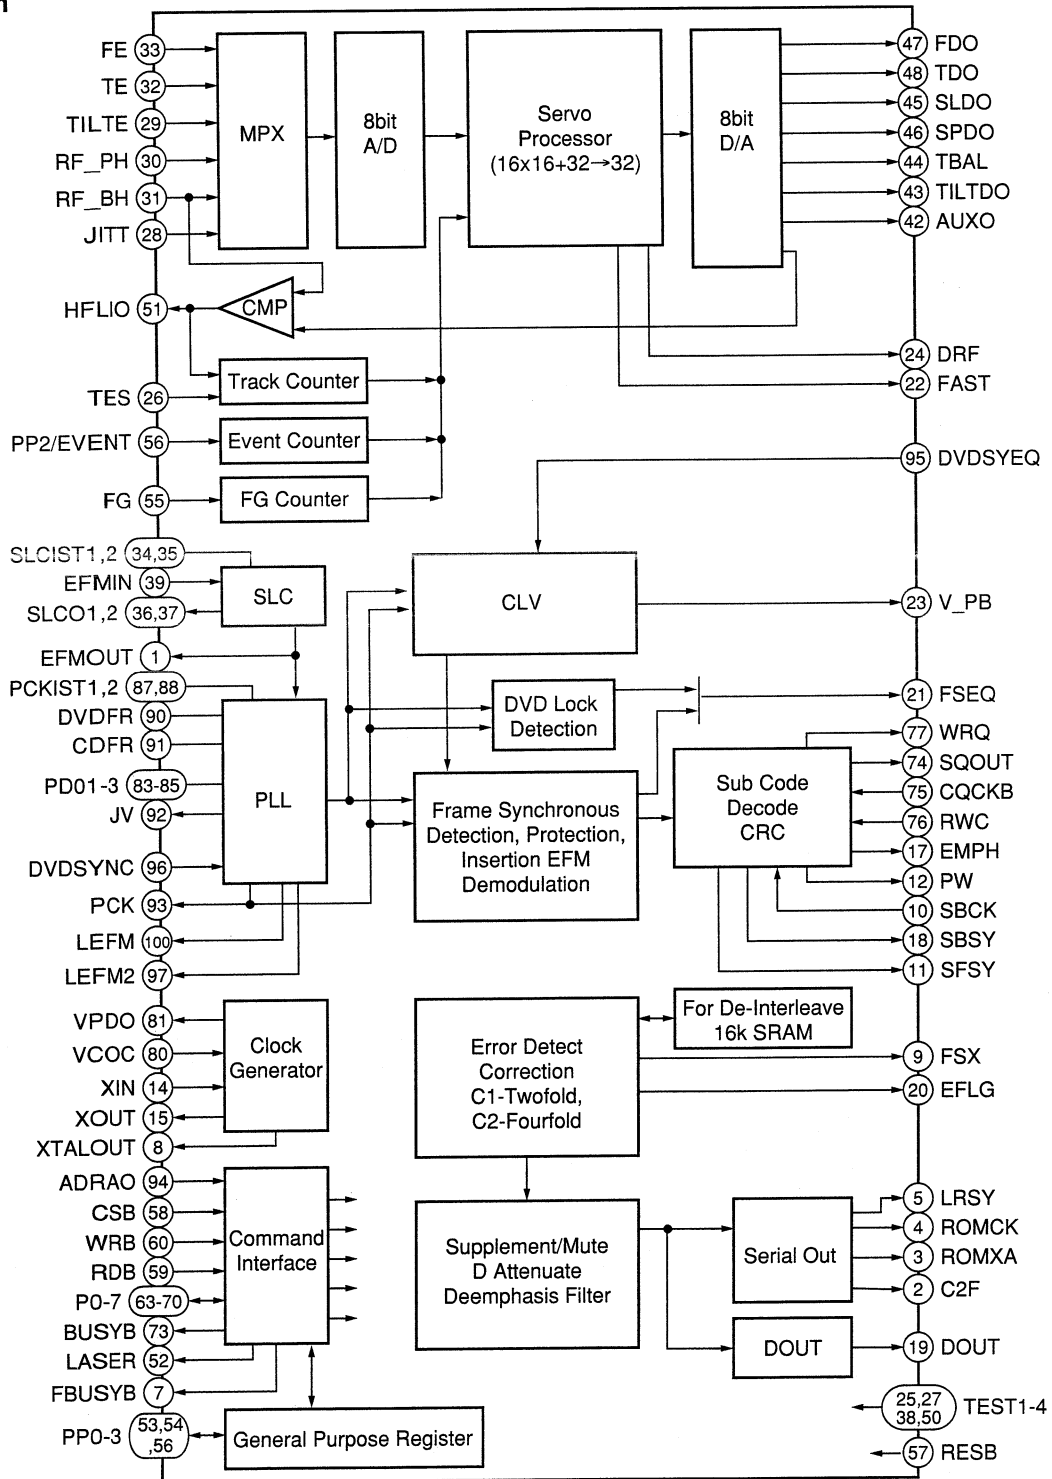

●Pin Function

No.	Pin Name	I/O	Function
1	EFMOUT	O	Output the state that was binary-stated value EFM
2	C2F	O	C2 flag output
3	ROMXA	O	CD-ROM data output
4	ROMCK	O	Shift clock output for CD-ROM data output
5	LRSY	O	L/R clock output for CD-ROM data output
6	PP3	I/O	General-purpose port input/output / DVD sync. signal input N ch-OD output
7	FBUSYB	O	Busy signal output of DSP process operation N ch-OD output
8	XTALOUT	O	External system clock output
9	FSX	O	CD 1 frame sync. signal output
10	SBCK	I	Subcode reading out clock input
11	SFSY	O	Frame sync. signal output of subcode
12	PW	O	Subcode P, Q, R, S, T, U, V and W output
13	VSS	–	GND pin
14	XIN	I	Connect a crystal resonator (16.9344MHz)
15	XOUT	O	Connect a crystal resonator
16	DVDD1	–	3.3V power supply of the oscillation circuit
17	EMPH	O	Monitor pin of the deemphasis
18	SBSY	O	Sync. signal output of the subcode block
19	DOUT	O	Audio EIAJ data output
20	EFLG	O	Error correction state monitor of the error correction C1 and C2
21	FSEQ	O	Detection monitor of the CD/DVD frame sync. signal
22	FAST	O	Playback speed monitor N ch-OD output
23	V_PB	O	Monitor output of the rough servo/CLV control
24	DRF	O	In focus monitor
25	TEST3	I	Test input 3
26	TES	I	Tracking error signal input
27	TEST2	I	Test input 2
28	JITT	I	Jitter quantity detecting signal input of EFM PLL
29	TILTE	I	Tilt error signal input
30	RF_PH	I	RF peak hold signal input
31	RF_BH	I	RF bottom hold signal input
32	TE	I	Tracking error signal input
33	FE	I	Focus error signal input
34	SLCIST1	–	Current setting pin 1 of the constant current charge pump for SLC
35	SLCIST2	–	Current setting pin 2 of the constant current charge pump for SLC
36	SLCO1	O	Control output 1 for SLC
37	SLCO2	O	Control output 2 for SLC
38	TEST1	I	Test input 1
39	EFMIN	I	EFM/EFM + input
40	AVDD	–	5V power supply of A/D and D/A for servo
41	AVSS	–	GND of A/D and D/A for servo
42	AUXO	O	DA auxiliary output
43	TILTDO	O	Tilt control signal output
44	TBAL	O	Tracking balance control signal output
45	SLDO	O	Sled control signal output
46	SPDO	O	Spindle control signal output
47	FDO	O	Focus control signal output
48	TDO	O	Tracking control signal output
49	VREF	–	Reference level of D/A for servo
50	TEST4	I	Test input 4

No.	Pin Name	I/O	Pin Function
51	HFLIO	I/O	Mirror detection signal input/output
52	LASER	O	Output pin for laser ON/OFF control
53	PP0/DVD_CDB	I/O	General-purpose port input/output / Disc discrimination signal output
54	PP1/CRCERRB	I/O	General-purpose port input/output / Subcode CRC result signal output
55	FG	I	FG counter input
56	PP2/EVENT	I/O	General-purpose port input/output / Event counter input
57	RESB	I	Reset input
58	CSB	I	Chip select input
59	RDB	I	Internal state reading signal input
60	WRB	I	Command / data writing signal input
61	DVDD2	–	5V power supply
62	VSS	–	GND
63	P0	I/O	Command / data input/output
64	P1		
65	P2		
66	P3		
67	P4		
68	P5		
69	P6		
70	P7		
71	VSS	–	GND
72	DVDD1	–	3.3V power supply for internal
73	BUSYB	O	Busy signal output of command process
74	SQOUT	O	Serial output of subcode Q
75	CQCKB	I	Shift clock input for subcode Q data output
76	RWC	I	Update permission input of subcode Q
77	WRQ	O	Read out ready monitor of subcode Q
78	AVSS	–	PLL GND for internal system clock
79	VRPFR	–	VCO oscillation range setting of PLL for system clock
80	VCOC	I	Connect a PLL filter for system clock
81	VPDO	O	
82	AVDD	–	PLL 5V power supply for system clock
83	PDO1	I/O	PLL filter connection pin 1 for EFM playback
84	PDO2	I/O	PLL filter connection pin 2 for EFM playback
85	PDO3	I/O	PLL filter connection pin 3 for EFM playback
86	AVSS	–	PLL GND for EFM playback
87	PCKIST1	–	Current setting 1 of PLL constant current charge pump for EFM playback
88	PCKIST2	–	Current setting 2 of PLL constant current charge pump for EFM playback
89	AVDD	–	PLL 5V power supply for EFM playback
90	DVDFR	–	VCO oscillation range setting of PLL for EFM playback 1
91	CDFR	–	VCO oscillation range setting of PLL for EFM playback 2
92	JV	O	Jitter output of PLL clock for EFM playback
93	PCK	O	Bit clock output for EFM playback
94	ADRAO	I	Address input
95	DVDSYEQ	I	DVD synchronize pulse input
96	DVDSYNC	I	DVD synchronous signal input
97	LEFM2	O	Output the state that cut and out a signal which was binary-stated value EFM with PCK 2
98	DVDD1	–	3.3V power supply for I/O
99	VSS	–	GND
100	LEFM	O	Output the state that cut and out a signal which was binary-stated value EFM with PCK 1

■ PD3410A (DVDM ASSY : IC11)

• System Control IC

• Pin Function


No.	Mark	Pin Name	I/O	Function
1	XCS3/XCASL	XCS3	O	PD4995A (MY CHIP) chip select signal output
2	GND	GND	–	GND
3	CK	HCPUCK	O	N.C.
4	VCC	V+3D	–	V+3D
5	PICLK	–	I/O	N.C.
6	PIDATA	–	I/O	N.C.
7	GND	GND	–	GND
8	PORTH0	–	O	N.C.
9	PORTH1	–	O	N.C.
10	PORTH2	36MVH	O	BU2158F (Clock generator)
11	PORTH3	V_SEL2	O	Composite/S switching signal output of the skirt terminal [WY model]
12	VCC	V+3D	–	V+3D
13	PORTH4	–	O	N.C.
14	PORTH5	–	O	N.C.
15	PORTH6	–	O	N.C.
16	PORTH7	–	O	N.C.
17	GND	GND	–	GND
18	EXTAL	EXTAL	I	Connect a ceramic resonator
19	XTAL	XTAL	O	
20	VCC	V+3D	–	V+3D
21	PORTG0	XCSDFO	O	DAC chip select signal output (← XLAT3)
22	PORTG1	–	O	N.C.
23	PORTG2	–	O	N.C.
24	PORTG3	–	O	N.C.
25	PORTG4	–	O	N.C.
26	GND	GND	–	GND
27	PORTG5	–	O	N.C.
28	PORTG6	–	O	N.C.
29	PORTG7	XAMUTE	O	Last stage mute signal output of the audio
30	PORTF0	44X48	O	DAC 44/48 FS switching signal output
31	PORTF1	–	I	N.C.
32	PORTF2	3DON	O	3D audio ON/bypass switching signal output
33	VCC	V+3D	–	V+3D
34	PORTF3	–	O	N.C.
35	PORTF4	XAVSRST	O	Sync. reset port
36	PORTF5	–	O	N.C.

No.	Mark	Pin Name	I/O	Function
127	GND	GND	–	GND
128	AD1	D1	I/O	Data bus 1
129	AD2	D2	I/O	Data bus 2
130	AD3	D3	I/O	Data bus 3
131	AD4	D4	I/O	Data bus 4
132	AD5	D5	I/O	Data bus 5
133	AD6	D6	I/O	Data bus 6
134	VCC	V+3D	–	V+3D
135	AD7	D7	I/O	Data bus 7
136	AD8	D8	I/O	Data bus 8
137	AD9	D9	I/O	Data bus 9
138	AD10	D10	I/O	Data bus 10
139	GND	GND	–	GND
140	AD11	D11	I/O	Data bus 11
141	AD12	D12	I/O	Data bus 12
142	AD13	D13	I/O	Data bus 13
143	AD1	D14	I/O	Data bus 14
144	VCC	V+3D	–	V+3D
145	AD15	D15	I/O	Data bus 15
146	A0 (XHBS)	A0	○	Address bus 0
147	A1	A1	○	Address bus 1
148	A2	A2	○	Address bus 2
149	GND	GND	–	GND
150	A3	A3	○	Address bus 3
151	A4	A4	○	Address bus 4
152	A5	A5	○	Address bus 5
153	A6	A6	○	Address bus 6
154	A7	A7	○	Address bus 7
155	A8	A8	○	Address bus 8
156	A9	A9	○	Address bus 9
157	A10	A10	○	Address bus 10
158	A11	A11	○	Address bus 11
159	A12	A12	○	Address bus 12
160	A13	A13	○	Address bus 13
161	A14	A14	○	Address bus 14
162	A15	A15	○	Address bus 15
163	A16	A16	○	Address bus 16
164	A17	A17	○	Address bus 17
165	VCC	V+3D	–	V+3D
166	A18	A18	○	Address bus 18
167	A19	A19	○	Address bus 19
168	A20	A20	○	Address bus 20 [RAM model]
169	A21	A21	○	N.C.
170	XNMI	XNMI	I	V+3D
171	GND	GND	–	GND
172	XCS10	–	○	N.C.
173	XCS20	XCS20	○	Chip select signal output of the flash ROM
174	XCS22	–	○	Chip select signal output of the GUI ROM [OEM model]
175	XCS23	XCS23	○	Chip select signal output of the SRAM
176	XCS2	–	○	N.C.

■ MB86373B (DVDM ASSY : IC18)

• MPEG2 Decoder IC

● Block Diagram

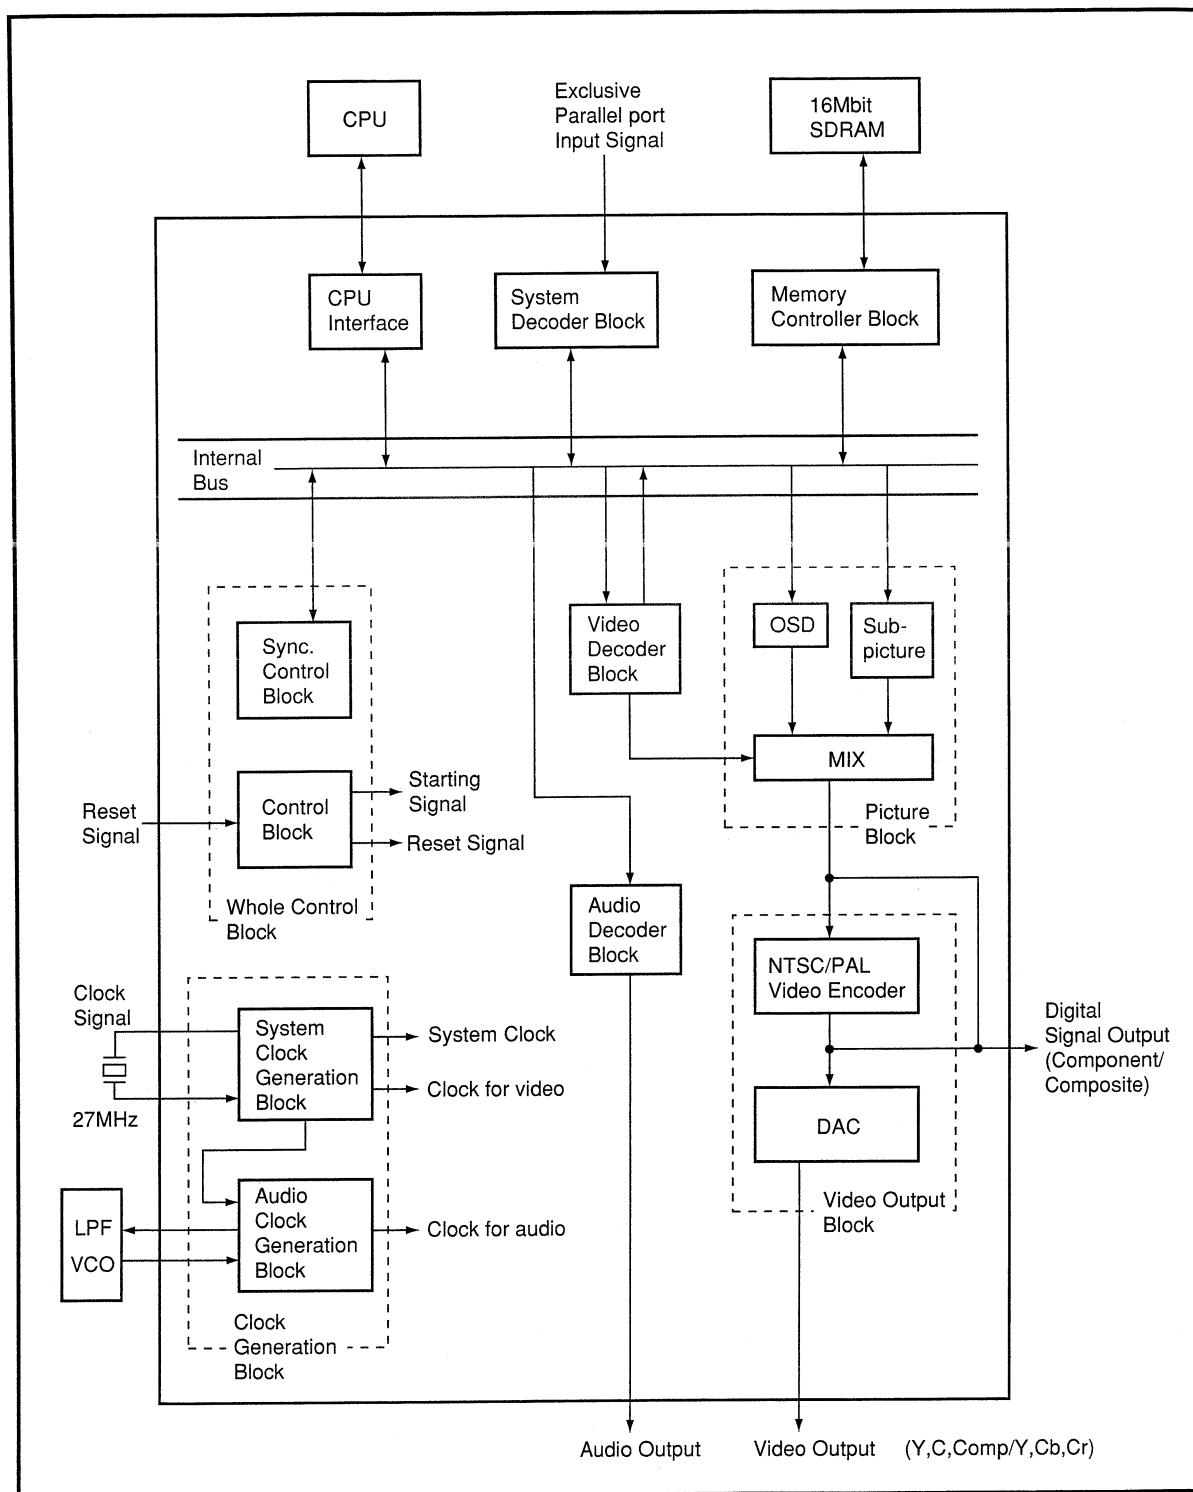

No.	Pin Name	I/O	Function	No.	Pin Name	I/O	Function
131	VDD	–	2.5V power supply	170	XMDRCAS	O	CAS signal for SDRAM
132	XINT0	O	Interrupt request signal to CPU	171	XMDRDQM1	O	Input mask / output enable signal for SDRAM
133	XEXTRDY	O	SPARC, 68 system : Ready signal to CPU 86 system : Acknowledge (ACK) signal to CPU	172	VSS	–	GND
134	HRW	I	CPU read / write signal	173	XMDRWE	O	Write enable signal for SDRAM
135	HCLKIN	I	Host clock input	174	XMDRDQM0	O	Input mask / output enable signal for SDRAM
136	XHCS	I	LSI chip select signal	175	MDRDAT8	I/O	Data bus signal for SDRAM
137	XHAS	I	SPARC, 68 system : CPU address strobe 86 system : CPU address status	176	VSS	–	GND
138	XHBE3	I	CPU byte enable signal	177	MDRDAT7	I/O	Data bus signal for SDRAM
139	XHBE2			178	MDRDAT9		
140	XHBE1			179	MDRDAT6		
141	XHBE0			180	MDRDAT10		
142	VSS	–	GND	181	MDRDAT5		
143	MDRADR4	O	Address signal for SDRAM	182	VSS	–	GND
144	MDRADR3			183	VDD	–	2.5V power supply
145	MDRADR5			184	MDRDAT11	I/O	Data bus signal for SDRAM
146	MDRADR2			185	MDRDAT14		
147	VDD	–	2.5V power supply	186	MDRDAT12		
148	VSS	–	GND	187	MDRDAT3		
149	MDRADR6	O	Address signal for SDRAM	188	MDRDAT13		
150	MDRADR1			189	VSS	–	GND
151	MDRADR7			190	MDRDAT2	I/O	Data bus signal for SDRAM
152	MDRADR0		Address signal for SDRAM (LSB)	191	MDRDAT14		
153	MDRADR8		Address signal for SDRAM	192	MDRDAT1		
154	VSS	–	GND	193	MDRDAT15		Data bus signal for SDRAM (MSB)
155	TEST6	I	"L" status normally	194	MDRDAT0	I/O	Data bus signal for SDRAM (LSB)
156	TEST7			195	VSS	–	GND
157	TEST8			196	N.C.	–	Non connection
158	TEST9			197	ICK27M	I	System clock input
159	MDRADR10	O	Address signal for SDRAM	198	VSS	–	GND
160	MDRADR9			199	OCK27M	O	System clock output
161	MDRADR11		Address signal for SDRAM (MSB)	200	VSSA(VCO)	–	GND (for VCO only)
162	XMDRCS	O	Chip select signal for SDRAM	201	VDDA(VCO)	–	2.5V power supply (for VCO only)
163	MDRCKE	O	Clock enable signal for SDRAM	202	ILPF	O	PLL block inverter output for audio
164	VSS	–	GND	203	MLPF	I	PLL block inverter input for audio
165	VDD	–	2.5V power supply	204	OLPF	O	Phase detector output for audio
166	XMDRRAS	O	RAS signal for SDRAM	205	OVCO	I	VCO input for audio clock
167	MDRCLK	O	Clock output signal for SDRAM	206	VSS	–	GND
168	VSS	–	GND	207	XPLLST	I	PLL section reset signal
169	MDRCLKIN	I	Clock input signal for SDRAM	208	XSYNCRST	I	SYNC reset signal

3. PCB PARTS LIST

- NOTES: • Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
 • The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 • When ordering resistors, first convert resistance values into code form as shown in the following examples.
 Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560 Ω \rightarrow 56×10^1 \rightarrow 561 RD1/4PU 5 6 1 J
 47k Ω \rightarrow 47×10^3 \rightarrow 473 RD1/4PU 4 7 3 J
 0.5 Ω \rightarrow R50 RN2H R 5 0 K
 1 Ω \rightarrow 1R0 RS1P 1 R 0 K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62k Ω \rightarrow 562×10^1 \rightarrow 5621 RN1/4PC 5 6 2 1 F

A LOAB ASSY

Mark	Ver. (DB-VPBxxx)	No.	Part No. (for PCS)	Description	Part No. (for MJI)
NSP NSP		SWITCH S101	9965 000 07961	VSK1011	*SM000340R
		OTHERS CN101	—	S3B-PH-K-S, KR CONNECTOR	—
		—	—	VNP1762, PC BOARD LOAB	—

B SMEB ASSY

Mark	Ver. (DB-VPBxxx)	No.	Part No. (for PCS)	Description	Part No. (for MJI)
NSP NSP NSP NSP	210,211,213,214 212	SWITCH S201	9965 000 07962	DSG1016	*SP001020R
		OTHERS CN201	—	52044-0345, 3P FFC CONNECTOR	—
		CN202	—	VKN1212, 8P FFC CONNECTOR	—
		—	—	VNP1695, PC BOARD SMEB	—
		—	—	VNP1722, PC BOARD SMEB	—

C FGSB ASSY

Mark	Ver. (DB-VPBxxx)	No.	Part No. (for PCS)	Description	Part No. (for MJI)
NSP		SEMICONDUCTOR PC101	9965 000 07963	GP2S60	*HW100500R
		RESISTOR R101	—	RS1/10S331J	—

D DVDM ASSY

Mark	Ver. (DB-VPBxxx)	No.	Part No. (for PCS)	Description	Part No. (for MJI)
	212	SEMICONDUCTORS			
		IC21	9965 000 07964	CY2081SL-638	*HC106340R
		IC14	9965 000 07965	KM68V1000CLT-7L	*HC106350R
		IC1	9965 000 07966	LA9701M	*HC105850R
		IC2	9965 000 07967	LC78652W	*HC105860R
		IC3	9965 000 07968	M56788FP	*HC105870R
		IC19	9965 000 07969	MB811171622A-100FN	*HC106040R
		IC18	9965 000 07970	MB86373B	*HC106360R
		IC26	9965 000 07971	MC44724A	*HC106640R
		IC15	9965 000 07972	MN414800CSJ-07	*HC105900R
		IC5,IC7	4822 209 30455	NJM2100M (or BA4510F)	HC10085090
		IC11	9965 000 07973	PD3410A	*HU100400R

Mark	Ver. (DB-VPBxxx)	No.	Part No. (for PCS)	Description	Part No. (for MJI)
	210,212 211 213,214	IC12 IC8 IC13 IC13 IC13 Q106,Q109,Q81,Q83,Q85 Q87,Q89,Q91 Q114,Q121,Q251 Q131 Q102 Q103,Q6,Q7 Q101 Q112,Q113 Q107,Q4,Q5 Q3 Q1 D301 D6 D665,D666	9965 000 07974 4822 209 17539 9965 000 07975 9965 000 07975 9965 000 07975 4822 130 10698 4822 130 10698 4822 130 60669 9965 000 07976 4822 130 63838 9965 000 07977 4822 130 63843 9965 000 07978 9965 000 07979 9965 000 07980 9965 000 07981 9965 000 07982 9322 154 46685 9965 000 06882	PE5108A TC7SHU04F VYW1761 (4M) VYW1762 (4M) VYW1763 (8M) 2SA1576A 2SA1576A 2SC4081 DTC114EUA HN1A01F HN1B04FU HN1C01F HN1C01FU RN1902 RN1911 RN4982 KV1471E RB501V-40 RB521S-30	*HC106370R *HC105940R *HC106750R *HC106760R *HC106380R HX100012A0 HX100012A0 HX300012A0 *BA000910R BA10011050 *BA000920R *BA000930R *BA000940R *BA001020R *BA000960R *BA001030R *HZ400020R *HZ200100R *HZ200110R
NSP		COILS L150,L330	—	LCYA100J2520	—
NSP		L304	—	LCYA2R7J2520	—
NSP		L81	—	VTL1067, CHIP COIL	—
		L85,L911	9965 000 07983	VTL1084, CHIP BEADS	*FC900240R
		CAPACITORS C123,C146,C613,C843	—	CCSRCH101J50	—
NSP		C322	—	CCSRCH120J50	—
NSP		C135	—	CCSRCH121J50	—
NSP		C104-C108	—	CCSRCH150J50	—
NSP		C206,C210,C211	—	CCSRCH151J50	—
NSP		C333	—	CCSRCH180J50	—
NSP		C116,C151,C314	—	CCSRCH220J50	—
NSP		C152	—	CCSRCH221J50	—
NSP		C127,C209,C337	—	CCSRCH331J50	—
NSP		C134,C236	—	CCSRCH470J50	—
NSP		C122,C208	—	CCSRCH471J50	—
NSP		C126,C335	—	CCSRCH560J50	—
NSP		C334	—	CCSRCH5R0C50	—
NSP		C124,C132	—	CCSRCH680J50	—
NSP		C117,C240,C352,C360	—	CCSRCH681J25	—
NSP		C845,C846	—	CCSRCK2R0C50	—
NSP		C129,C142,C842	—	CEV101M10	—
NSP	212	C827	—	CEV101M10	—
NSP		C113,C139	—	CEV220M16	—
NSP		C405,C413,C700,C808	—	CEV221M4	—
NSP		C111,C149,C205,C207,C401	—	CEV470M6R3	—
NSP		C403,C407	—	CEV470M6R3	—
NSP		C140,C223,C224,C252,C264	—	CKSQYB105K10	—
NSP		C312	—	CKSQYB105K10	—
NSP		C148,C217,C327,C414	—	CKSQYF105Z16	—
NSP		C801,C802,C807,C809-C815	—	CKSQYF105Z16	—
NSP		C817-C821	—	CKSQYF105Z16	—
NSP	212	C826,C828	—	CKSQYF105Z16	—
NSP		C216,C313	—	CKSRYB102K50	—
NSP		C133,C136,C203,C220,C225	—	CKSRYB103K50	—
NSP		C239,C320,C321,C603,C625	—	CKSRYB103K50	—
NSP		C703,C711	—	CKSRYB103K50	—
NSP		C101,C102,C114,C118,C119	—	CKSRYB104K16	—
NSP		C121,C138,C204,C212,C213	—	CKSRYB104K16	—
NSP		C227,C231,C263,C315,C317	—	CKSRYB104K16	—
NSP		C332,C804	—	CKSRYB104K16	—
NSP		C153,C266	—	CKSRYB223K25	—
NSP		C357	—	CKSRYB223K50	—
NSP		C354	—	CKSRYB332K50	—
NSP		C214,C251,C261,C351	—	CKSRYB472K50	—
NSP		C330	—	CKSRYB682K50	—
NSP		C109,C110,C120,C130,C131	—	CKSRYF104Z16	—
NSP		C143,C150,C202,C215	—	CKSRYF104Z16	—
NSP		C221,C222,C226,C230,C235	—	CKSRYF104Z16	—

Mark	Ver. (DB-VPBxxx)	No.	Part No. (for PCS)	Description	Part No. (for MJ)
NSP		C265,C299,C319,C359,C367	—	CKSRYF104Z16	—
NSP		C369,C370,C402,C404,C406	—	CKSRYF104Z16	—
NSP		C408,C410,C412,C601,C602	—	CKSRYF104Z16	—
NSP		C604-C612,C614,C615	—	CKSRYF104Z16	—
NSP		C617-C620,C626,C701,C702	—	CKSRYF104Z16	—
NSP		C704-C710,C712-C724,C726	—	CKSRYF104Z16	—
NSP		C831-C833,C844	—	CKSRYF104Z16	—
NSP	212	C822-C825,C829,C830	—	CKSRYF104Z16	—
NSP	212	C834-C836,C858,C859	—	CKSRYF104Z16	—
NSP		C368,C411 (47mF/16V)	—	VCH1166	—
RESISTORS					
NSP		R123 (39 OHM)	—	ACN7047	—
NSP		R732,R733,R735,R736 (47k OHM)	—	ACN7077	—
NSP		R632 (100OHM)	—	DCN1092	—
NSP		R608,R609,R613,R624,R627 (10k OHM)	—	DCN1094	—
NSP		R629,R631,R633,R638,R654 (10k OHM)	—	DCN1094	—
NSP		R657,R658,R664,R706 (10kOHM)	—	DCN1094	—
NSP		R717,R718 (10k OHM)	—	DCN1094	—
NSP		R121,R663 (10k OHM)	—	DCN1104	—
NSP		R712,R715,R881 (0 OHM)	—	DCN1106	—
NSP	212	R838 (0 OHM)	—	DCN1106	—
NSP		R1020,R2010,R2020, R2030,R2040	—	RS1/10S0R0J	—
NSP		R3050,R4010,R4020, R4030,R4040	—	RS1/10S0R0J	—
NSP		R4050,R4060,R407,R685,R722	—	RS1/10S0R0J	—
NSP		R8000,R821	—	RS1/10S0R0J	—
NSP	210,211,213,214	R501,R502,R801,R802,R828	—	RS1/10S0R0J	—
NSP	212	R803,R304,R829,R854 -R856,R858-R860	—	RS1/10S0R0J	—
NSP	212	R875,R920,R922,R970 -R973,R8010	—	RS1/10S0R0J	—
NSP	212	R8200	—	RS1/10S0R0J	—
NSP		R202,R3510	—	RS1/10S101J	—
NSP	212	R839	—	RS1/16S103J	—
NSP	210,211,213,214	R2	—	RS1/16S103J	—
NSP	212	R2	—	RS1/16S223J	—
NSP	212	R1	—	RS1/16S333J	—
NSP		R700	—	RS1/10S1R2J	—
NSP	212	R836,R837	—	RS1/16S1001F	—
NSP		R807	—	RS1/16S1201F	—
NSP	212	R831,R832	—	RS1/16S1201F	—
NSP		R806	—	RS1/16S1501F	—
NSP		R363,R365	—	RS1/16S1503F	—
NSP	212	R825	—	RS1/16S1800F	—
NSP	212	R834,R385	—	RS1/16S1801F	—
NSP	210,211,213,214	R825	—	RS1/16S2000F	—
NSP	212	R822-R824	—	RS1/16S2000F	—
NSP		R826,R827	—	RS1/16S2000F	—
NSP	212	R830	—	RS1/16S2002F	—
NSP		R805	—	RS1/16S2701F	—
NSP	212	R833	—	RS1/16S3902F	—
NSP		R361,R364	—	RS1/16S6202F	—
NSP		Other Resistors	—	RS1/16SxxxJ	—
OTHERS					
		CN4	9965 000 07984	DKN1193, FLEXIBLE CONNECTOR	*YJ002230R
		X2	9965 000 07985	DSS1110, CHIP CERALOCK (20MHz)	*FQ000450R
NSP		CN2	—	S2B-PH-SM3, PH CONNECTOR	—
NSP		CN1	—	S3B-PH-SM3, PH CONNECTOR	—
NSP		—	—	VDA1681, FLEXIBLE CABLE (07P)	—
NSP	210,212,213	CN15,CN5	—	VKN1516, CONNECTOR 30P	—
NSP	211,214	CN15,CN5	—	VKN1626, B TO B CONNECTOR 30P	—
NSP		CN3	—	VKN1763, 8P FFC CONNECTOR	—
NSP		—	—	VRW1773, BAR-CODE LABEL	—
		X1	9965 000 07986	VSS1147, CRYSTAL RESONATOR (13.824MHz)	*JX000700R